

District I  
1625 N. French Dr., Hobbs, NM 88240  
District II  
1301 W. Grand Avenue, Artesia, NM 88210  
District III  
1000 Rio Brazos Road, Aztec, NM 87410  
District IV  
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico  
Energy Minerals and Natural Resources

Oil Conservation Division  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

Form C-144  
June 1, 2004

For drilling and production facilities, submit to appropriate NMOCD District Office.  
For downstream facilities, submit to Santa Fe office

**Pit or Below-Grade Tank Registration or Closure**


Is pit or below-grade tank covered by a "general plan"? Yes ☒ No ☐

Type of action: Registration of a pit or below-grade tank ☐ Closure of a pit or below-grade tank ☒

Operator: BP America Production Company Telephone: (505)326-9200 e-mail address: \_\_\_\_\_  
Address: 200 Energy Ct. Farmington, NM 87401  
Facility or well name: GCU #516 API #: 3004528063 U/L or Qtr/Qtr L Sec 7 T 28N R 11W  
County: San Juan Latitude \_\_\_\_\_ Longitude \_\_\_\_\_ NAD: 1927 ☐ 1983 ☐  
Surface Owner: Federal ☐ State ☐ Private ☐ Indian ☐

**Pit**  
Type: Drilling ☐ Production ☒ Disposal ☐  
Workover ☐ Emergency ☐  
Lined ☐ Unlined ☐  
Liner type: Synthetic ☐ Thickness \_\_\_\_\_ mil Clay ☐  
Pit Volume \_\_\_\_\_ bbl

**Below-grade tank**  
Volume: \_\_\_\_\_ bbl Type of fluid: \_\_\_\_\_  
Construction material: \_\_\_\_\_  
Double-walled, with leak detection? Yes ☐ If not, explain why not: \_\_\_\_\_



Depth to ground water (vertical distance from bottom of pit to seasonal high water elevation of ground water.)	Less than 50 feet	(20 points)
	50 feet or more, but less than 100 feet	(10 points)
	100 feet or more	( 0 points)
Wellhead protection area: (Less than 200 feet from a private domestic water source, or less than 1000 feet from all other water sources.)	Yes	(20 points)
	No	( 0 points)
Distance to surface water: (horizontal distance to all wetlands, playas, irrigation canals, ditches, and perennial and ephemeral watercourses.)	Less than 200 feet	(20 points)
	200 feet or more, but less than 1000 feet	(10 points)
	1000 feet or more	( 0 points)
Ranking Score (Total Points)		

If this is a pit closure: (1) Attach a diagram of the facility showing the pit's relationship to other equipment and tanks. (2) Indicate disposal location: (check the onsite box if you are burying in place) onsite ☐ offsite ☐ If offsite, name of facility \_\_\_\_\_. (3) Attach a general description of remedial action taken including remediation start date and end date. (4) Groundwater encountered: No ☐ Yes ☐ If yes, show depth below ground surface \_\_\_\_\_ ft. and attach sample results. (5) Attach soil sample results and a diagram of sample locations and excavations.

Additional Comments:

See Attached Documentation

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that the above-described pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines ☒, a general permit ☐, or an (attached) alternative OCD-approved plan ☐.

Date: 11/01/2005

Printed Name/Title Jeffrey C. Blagg, Agent

Signature Jeffrey C. Blagg

Your certification and NMOCD approval of this application/closure does not relieve the operator of liability should the contents of the pit or tank contaminate ground water or otherwise endanger public health or the environment. Nor does it relieve the operator of its responsibility for compliance with any other federal, state, or local laws and/or regulations.

Approval: DEPUTY OIL & GAS INSPECTOR, DIST. 5

Printed Name/Title

Signature Brian D. Bell

Date: JAN 09 2006


CLIENT: <u>BP</u>	<b>BLAGG ENGINEERING, INC.</b> <b>P.O. BOX 87, BLOOMFIELD, NM 87413</b> <b>(505) 632-1199</b>	LOCATION NO: <u>81337</u> COCR NO: <u>11661</u>
<b>FIELD REPORT: PIT CLOSURE VERIFICATION</b>		PAGE No: <u>1</u> of <u>1</u>
LOCATION: NAME: <u>GCM</u> WELL #: <u>516</u> TYPE: <u>DEHY.</u> QUAD/UNIT: <u>L SEC: 7 TWP: 28N RING: 11W PM: NM CNTY: ST ST: NM</u> QTR/FOOTAGE: <u>1745'S / 950'W</u> NW/5W CONTRACTOR: <u>HDI (HEBER)</u>		DATE STARTED: <u>2/17/04</u> DATE FINISHED: <u>2-18-04</u> ENVIRONMENTAL SPECIALIST: <u>NV</u>
EXCAVATION APPROX. <u>NA</u> FT. x <u>NA</u> FT. x <u>NA</u> FT. DEEP. CUBIC YARDAGE: <u>NA</u> DISPOSAL FACILITY: <u>ON-SITE</u> REMEDIATION METHOD: <u>CLOSE AS IS</u> LAND USE: <u>RANGE</u> LEASE: <u>STATE</u> FORMATION: <u>PC</u>		
FIELD NOTES & REMARKS: PIT LOCATED APPROXIMATELY <u>65</u> FT. <u>SSIE</u> FROM WELLHEAD. DEPTH TO GROUNDWATER: <u>&lt;50'</u> NEAREST WATER SOURCE: <u>&gt;1000'</u> NEAREST SURFACE WATER: <u>&lt;1000</u> NMOCD RANKING SCORE: <u>30</u> NMOCD TPH CLOSURE STD: <u>100</u> PPM		
SOIL AND EXCAVATION DESCRIPTION: SOIL TYPE: <u>SAND</u> / SILTY SAND / SILT / SILTY CLAY / CLAY / GRAVEL / OTHER SOIL COLOR: <u>PALE YEL. ORANGE</u> COHESION (ALL OTHERS): <u>NON COHESIVE</u> / SLIGHTLY COHESIVE / COHESIVE / HIGHLY COHESIVE CONSISTENCY (NON COHESIVE SOILS): <u>LOOSE</u> / FIRM / DENSE / VERY DENSE PLASTICITY (CLAYS): NON PLASTIC / SLIGHTLY PLASTIC / COHESIVE / MEDIUM PLASTIC / HIGHLY PLASTIC DENSITY (COHESIVE CLAYS & SILTS): <u>SOFT</u> / FIRM / STIFF / VERY STIFF / HARD MOISTURE: DRY / SLIGHTLY MOIST / <u>MOIST</u> / WET / SATURATED / SUPER SATURATED DISCOLORATION/STAINING OBSERVED: YES / <u>NO</u> EXPLANATION - HC ODOR DETECTED: YES / <u>NO</u> EXPLANATION - SAMPLE TYPE: <u>GRAB</u> / COMPOSITE - # OF PTS. <u>1</u> ADDITIONAL COMMENTS: <u>AREA WEST OF TANK EXCAVATED TO ~ 4' BELOW GRADE. COLLECTED SAMPLE W/ HAND SHOVEL ALONG SIDE OF TANK.</u>		
OVM CALIB. READ. = <u>53.9</u> ppm OVM CALIB. GAS = <u>100</u> ppm RF = 0.52 TIME: <u>9:04</u> am DATE: <u>2/16/04</u>		
SOIL TYPE: <u>SAND</u> / SILTY SAND / SILT / SILTY CLAY / CLAY / GRAVEL / OTHER SOIL COLOR: <u>PALE YEL. ORANGE</u> COHESION (ALL OTHERS): <u>NON COHESIVE</u> / SLIGHTLY COHESIVE / COHESIVE / HIGHLY COHESIVE CONSISTENCY (NON COHESIVE SOILS): <u>LOOSE</u> / FIRM / DENSE / VERY DENSE PLASTICITY (CLAYS): NON PLASTIC / SLIGHTLY PLASTIC / COHESIVE / MEDIUM PLASTIC / HIGHLY PLASTIC DENSITY (COHESIVE CLAYS & SILTS): <u>SOFT</u> / FIRM / STIFF / VERY STIFF / HARD MOISTURE: DRY / SLIGHTLY MOIST / <u>MOIST</u> / WET / SATURATED / SUPER SATURATED DISCOLORATION/STAINING OBSERVED: YES / <u>NO</u> EXPLANATION - HC ODOR DETECTED: YES / <u>NO</u> EXPLANATION - SAMPLE TYPE: <u>GRAB</u> / COMPOSITE - # OF PTS. <u>1</u> ADDITIONAL COMMENTS: <u>AREA WEST OF TANK EXCAVATED TO ~ 4' BELOW GRADE. COLLECTED SAMPLE W/ HAND SHOVEL ALONG SIDE OF TANK.</u>		

SCALE

0 FT

SAMP. TIME	SAMP. ID	LAB NO.	WEIGHT (g)	mL FREON	DILUTION	READING	CALC. (ppm)

PIT PERIMETER

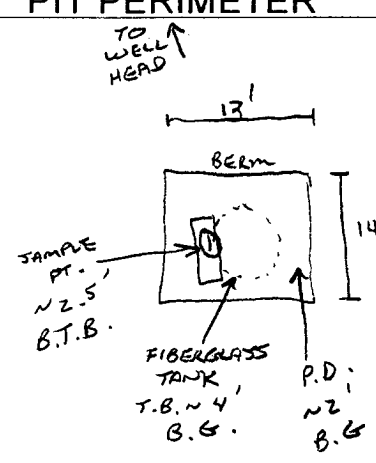

OVM READING

SAMPLE ID	FIELD HEADSPACE (ppm)
1 @ 6.5'	0.0
2 @	
3 @	
4 @	
5 @	

PIT PROFILE

NOT APPLICABLE

LAB SAMPLES

SAMPLE ID	ANALYSIS	TIME
① 6.5	TPH (8015 B)	0930
<u>PASSED</u>		

P.D. = PIT DEPRESSION; B.G. = BELOW GRADE; B = BELOW  
T.H. = TEST HOLE; ~ = APPROX.; T.B. = TANK BOTTOM

TRAVEL NOTES: CALLOUT: 2/17/04 - MORN. ONSITE: 2/17/04 - MORN.

revised: 09/04/02

bei1005C.skf

# ENVIROTECH LABS

PRACTICAL SOLUTIONS FOR A BETTER TOMORROW

## EPA METHOD 8015 Modified Nonhalogenated Volatile Organics Total Petroleum Hydrocarbons


Client:	Blagg / BP	Project #:	94034-010
Sample ID:	1 @ 6.5'	Date Reported:	02-18-04
Laboratory Number:	27841	Date Sampled:	02-17-04
Chain of Custody No:	11661	Date Received:	02-17-04
Sample Matrix:	Soil	Date Extracted:	02-17-04
Preservative:	Cool	Date Analyzed:	02-18-04
Condition:	Cool and Intact	Analysis Requested:	8015 TPH


Parameter	Concentration (mg/Kg)	Det. Limit (mg/Kg)
Gasoline Range (C5 - C10)	ND	0.2
Diesel Range (C10 - C28)	ND	0.1
Total Petroleum Hydrocarbons	ND	0.2

ND - Parameter not detected at the stated detection limit.

References: Method 8015B, Nonhalogenated Volatile Organics, Test Methods for Evaluating Solid Waste, SW-846, USEPA, December 1996.

Comments: GCU #516 Dehydrator Pit Grab Sample.

  
Analyst

  
Review