

30-039-06682

3531.

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL INC. Location: Unit L Sec. 6 Twp 26 Rng 4

Name of Well/Wells or Pipeline Serviced JICARILLA 119N #5
cps 2017

Elevation 7120' Completion Date 01/17/88 Total Depth 320' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. 105'

Depths gas encountered: N/A

Type & amount of coke breeze used: N/A

Depths anodes placed: 178', 171', 164', 157', 150', 143', 136', 129', 122', 115'

Depths vent pipes placed: 315'

Vent pipe perforations: 220'

Remarks: (gb #1)

RECEIVED

MAY 31 1991

OIL CON. DIV
DIST. 3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

CATHODIC PROTECTION CONSTRUCTION REPORT

DAILY LOG

COMP
10-24-88Drilling Log (Attach Hereto) ☐

Completion Date 10/17/88

CPS #

Well Name, Line or Plant:

Work Order #

State:

Ins. Union Check

2017 W		JICARILLA 119N *5		405 788		68V 600' W		☒ Good ☐ Bad	
Location: L-6-264		Anode Size: 2" X 60"		Anode Type: DURATION		Size Set: 6 3/4"			
Depth Drilled: 320'	Depth Logged: 315'	Drilling Rig Time:		Total Lbs. Coke Used:		Lost Circulation Mat'l Used:		No. Sacks Mat'l Used:	
Anode Depth	# 1 178	# 2 171	# 3 164	# 4 157	# 5 150	# 6 143	# 7 136	# 8 129	# 9 122
Anode Output (Amps)	# 1 3.8	# 2 4.8	# 3 5.5	# 4 4.3	# 5 3.4	# 6 3.9	# 7 6.8	# 8 6.8	# 9 6.4
Anode Depth	# 11	# 12	# 13	# 14	# 15	# 16	# 17	# 18	# 19
Anode Output (Amps)	# 11	# 12	# 13	# 14	# 15	# 16	# 17	# 18	# 19
Total Circuit Resistance	Volts 11.9		Amps 18.0		Ohms .66		No. 8 C.P. Cable Used:		No. 2 C.P. Cable Used:

Remarks: WATER AT 105', TOOK WATER SAMPLE. INSTALLED 315' of
1" P.V.C. VENT PIPE, PERFORATED 220'.

LAYED 1/2" FUEL LINE, IN WIRE DITCH.

G.B. 4170.00 ✓
 Rectifier Size: T.R.G. 7695.00 ✓
 Addn'l Depth: -A-
 Depth Credit: -185' 3.50 -647.50 ✓
 Extra Cable: 240 25 60.00 ✓
 Ditch & 1 Cable: 235' .75 176.25 ✓
 Ditch & 2 Cable:
 25' Meter Pole: -O-
 20' Meter Pole: -O-
 10' Stub Pole: -O-
 Junction Box: 1 249.00 ✓


11702.75 ✓

TAX 585.14 ✓

TOTAL 12287.89 ✓

All Construction Completed

(Signature)

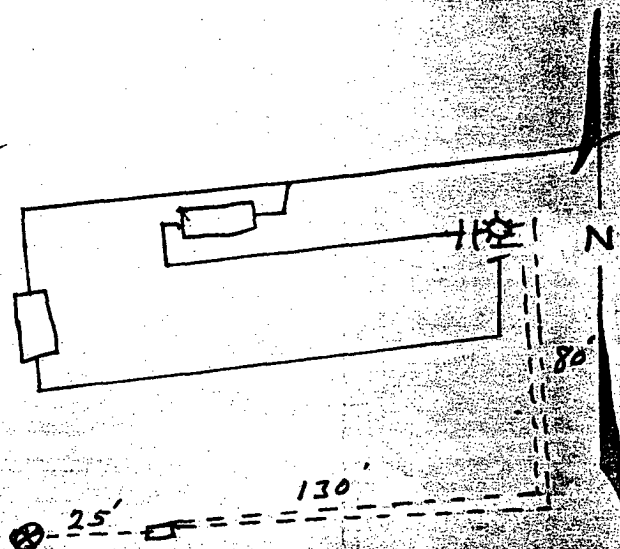

W/A

7120

D. CRASS DRILLING CO.

Drill No. 3

2017

DRILLER'S WELL LOG

S. P. No. Tic. 119 N #5 Date 10-17-88

Client Meridian Oil Co. Prospect _____

County Rio Arriba State New Mex.

If hole is a redrill or if moved from original staked position show distance and direction moved: _____

FROM	TO	FORMATION — COLOR — HARDNESS
0	100	SANDstone
100	115	SAND ✓
115	180	Shale
180	320	SANDstone

Mud _____ Brm _____ Lime _____

Rock Bit Number _____ Make _____

Remarks: Water @ 105'

Driller Ronnie Brown