

4A-30-039-22980
4E-30-039-23652

3535

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL INC. Location: Unit J Sec. 6 Twp 26 Rng 4

Name of Well/Wells or Pipeline Serviced JICARILLA 119N #4A, #4E
cps 2013w

Elevation 7151' Completion Date 10/12/88 Total Depth 300' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. DAMP AT 85' NO SAMPLE

Depths gas encountered: N/A

Type & amount of coke breeze used: N/A

Depths anodes placed: 200', 190', 180', 170', 160', 150', 140', 130', 110', 100'

Depths vent pipes placed: 298'

Vent pipe perforations: 220'

Remarks: gb #1

RECEIVED

MAY 31 1991

OIL CON. DIV.

DIST.

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

CATHODIC PROTECTION CONSTRUCTION REPORT

DAILY LOG

COMP 10-14-88 JD

Drilling Log (Attach Hereto) ☐

Completion Date 10/12/88

CPS #	Well Name, Line or Plant:	Work Order #	State:	Ins. Union Check:
2013 W	JICARILLA 119 N #4A	40549A	.56V 600' E	☒ Good ☐ Bad
	JICARILLA 119 N #4E	54049A	.60V 600' E	
Location:	Anode Size:	Anode Type:	Size Box:	
J-6-26-4	2" x 60"	Durion	6 3/4"	
Depth Drilled	Depth Logged	Drilling Rig Type	Total Lbs. Coke Used	Lost Circulation Mat'l Used
300	298			
Anode Depth				
#1 200	#2 190	#3 180	#4 170	#5 160
#6 150	#7 140	#8 130	#9 110	#10 100
Anode Output (Amps)				
#1 3.7	#2 5.4	#3 5.1	#4 4.1	#5 4.4
#6 7.0	#7 5.5	#8 4.3	#9 4.8	#10 4.8
Anode Depth				
#11	#12	#13	#14	#15
#16	#17	#18	#19	#20
Anode Output (Amps)				
#11	#12	#13	#14	#15
#16	#17	#18	#19	#20
Total Circuit Resistance			No. 8 C.P. Cable Used	No. 2 C.P. Cable Used
Volts 11.9	Amps 21.4	Ohms 56		

Remarks: Real damp at 85'; could not get a water sample. Last circulation at 260'; drilled it blind to 300, installed 298' of 1" P.V.C. Vent Pipe perforated 220'.

Layed 1/2" fuel gas line in wire ditch.

G.B. - 4170.00

Rectifier Size: T.E.G. V A 7695.00

Add'l Depth: _____

Depth Credit: -202 3.50 -707.00 ✓

Extra Cable: 365 25 91.25 ✓

Ditch & 1 Cable: 445' 75 333.75 ✓

Ditch & 2 Cable: _____

25' Meter Pole: _____

20' Meter Pole: _____

10' Stub Pole: _____

Junction Box: _____

249.00

11832.00 ✓


TAX 591.60 ✓

TOTAL \$12,423.60

OIL #4E

All Construction Completed

J.E. Statler
(Signature)

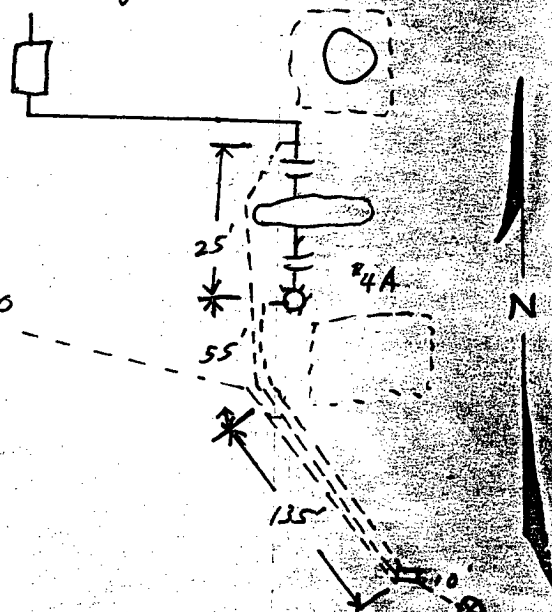

7151

D. CIASS DRILLING CO.

Drill No. D-3

2013

DRILLER'S WELL LOG

S. P. No. Tic. 119N #4A Date 10-12-88

Client Meridian Oil Co. Prospect _____

County Rio Arriba State New Mex.

If hole is a redrill or if moved from original staked position show distance
and direction moved: _____

FROM	TO	FORMATION — COLOR — HARDNESS
0	80	SANDSTONE
80	95	SAND
95	215	SHALE
215	230	SANDSTONE
230	200	SHALE
200	300	SANDSTONE

Mud _____ Brom _____ Lime _____

Rock Bit Number _____ Make _____

Remarks: Damp @ 85'

Driller RONNIE BROWN