

3533

30-039-22985

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL INC. Location: Unit A Sec. 7 Twp 26 Rng 5

Name of Well/Wells or Pipeline Serviced JICARILLA 152W #3E

cps 2015w

Elevation 7020' Completion Date 10/13/88 Total Depth 440' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. DAMP 160', 220' & 270' NO SAMPLE

Depths gas encountered: N/A

Type & amount of coke breeze used: N/A

Depths anodes placed: 385', 375', 360', 335', 315', 305', 295', 285', 275'

Depths vent pipes placed: N/A

Vent pipe perforations: 300'

Remarks: gb #1

RECEIVED

MAY 31 1991

OIL CON. DIV.
DIST. 3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

MERIDIAN OIL INC.
WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

COMP 10-24-88 QZ

Drilling Log (Attach Hereto) ☐

Completion Date 10/13/88

CPS #	Well Name, Line or Plant:	Work Order #	State:	Ins. Union Check
2015 W	JICARILLA 152 W *3E	40554A	71V 600' E	☒ Good ☐ Bad
Location:	Anode Size:	Anode Type:	Size Bit:	
A-7-26-5	2" x 60"	DURUM	6 3/4"	
Depth Drilled	Depth Logged	Drilling Rig Time	Total Lbs. Coke Used	Lost Circulation Mat'l Used
440	422			
Anode Depth				
# 1 385	# 2 375	# 3 360	# 4 335	# 5 325
# 6 315	# 7 305	# 8 295	# 9 285	# 10 275
Anode Output (Amps)				
# 1 4.0	# 2 3.4	# 3 3.0	# 4 3.8	# 5 3.0
# 6 4.0	# 7 4.9	# 8 4.9	# 9 3.8	# 10 3.5
Anode Depth				
# 11	# 12	# 13	# 14	# 15
# 16	# 17	# 18	# 19	# 20
Anode Output (Amps)				
# 11	# 12	# 13	# 14	# 15
# 16	# 17	# 18	# 19	# 20
Total Circuit Resistance		No. 8 C.P. Cable Used	No. 2 C.P. Cable Used	
Volts 11.8	Amps 20.0	Ohms .59		

Remarks: Damp spots in hole, at 160, 229, & 270, could not get water sample. Installed 1" P.V.C. Vent pipe, Perforated 300'.


Layed 1/2" fuel line in wire ditch.

G.B. 4170.00 ✓
Rectifier Size: T.E.G. 7695.00 ✓
Addn'l Depth
Depth Credit: - 78' 550 - 273.00 ✓
Extra Cable: 220' 25 55.00 ✓
Ditch & 1 Cable: 200' 75 150.00 ✓
Ditch & 2 Cable:
25' Meter Pole:
20' Meter Pole:
10' Stub Pole:
Junction Box: 1 249.00 ✓

12046.00 ✓
TAX 602.30 ✓
TOTAL \$ 12648.30 ✓

All Construction Completed

JR Staller
(Signature)

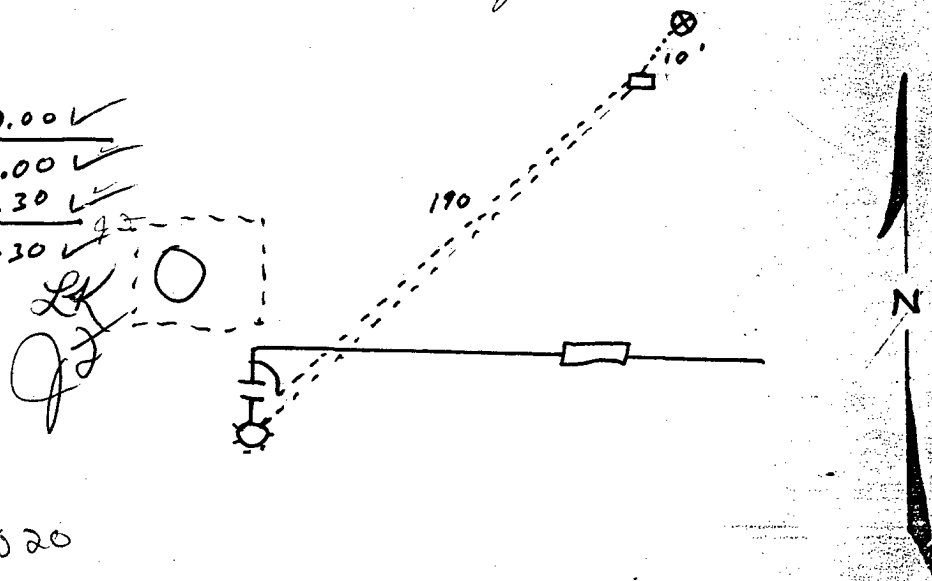

D. CRASS DRILLING CO.

Drill No. 3 2015

DRILLER'S WELL LOG

S. P. No. Tic. 152W #3E Date 10-13-88
Client Meridian Oil Co. Prospect _____
County Rio Arriba State New Mex

If hole is a redrill or if moved from original staked position show distance
and direction moved: _____

FROM	TO	FORMATION — COLOR — HARDNESS
0	60	Shale
60	150	SANDSTONE
150	160	SAND
160	210	Shale
210	220	SAND
220	240	Shale
240	270	SAND
270	400	Shale
400	440	SANDY SHALE

Mud _____ Bron _____ Lime _____

Rock Bit Number _____ Make _____

Remarks: Damp @ 160' 220' & 270'

Driller Ronnie Brown