

2 = 30-045-10178
17 = 30-045-23432
200 = 30-045-26949

3544

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL INC. Location: Unit G Sec. 35 Twp 31 Rng 10

Name of Well/Wells or Pipeline Serviced ATLANTIC C #2, #17, #200

cps 209lw


Elevation 6401' Completion Date 2/1/89 Total Depth 500' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with descriptions of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. 80'

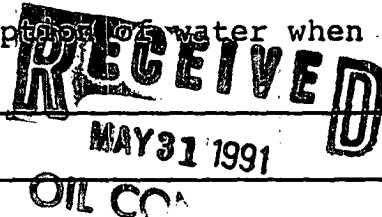

Depths gas encountered: N/A

Type & amount of coke breeze used: N/A

Depths anodes placed: 396', 388', 380', 370', 300', 293', 286', 279', 271', 263'

Depths vent pipes placed: 505'

Vent pipe perforations: 440'

Remarks 2b #3 DRILLED AND LOST 500' HOLE WITH 3 ANODES-HOLE CAVED.

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

Comp 2-8-89

Drilling Log (Attach Hereto) ☒

Completion Date 2-1-89

CPS #	Well Name, Line or Plant:	Work Order #	Static:	Ins. Union Check
2091-W	ATLANTIC "C" #200	3183A	600' NW = .769	☒ Good ☐ Bad
Location:	Anode Size:	Anode Type:	Size Bit:	
G35-31-10	2" x 60"	Duriron	6 3/4"	
Depth Drilled	Depth Logged	Drilling Rig Time	Total Lbs. Coke Used	Lost Circulation Mat'l Used
500'	500'			
Anode Depth				
# 1 396'	# 2 388'	# 3 380'	# 4 370'	# 5 300'
# 6 293'	# 7 286'	# 8 279'	# 9 271'	# 10 262'
Anode Output (Amps)				
# 1 3.8	# 2 3.9	# 3 5.3	# 4 3.5	# 5 3.4
# 6 3.4	# 7 4.1	# 8 4.6	# 9 4.5	# 10 3.3
Anode Depth				
# 11	# 12	# 13	# 14	# 15
# 16	# 17	# 18	# 19	# 20
Anode Output (Amps)				
# 11	# 12	# 13	# 14	# 15
# 16	# 17	# 18	# 19	# 20
Total Circuit Resistance			No. 8 C.P. Cable Used	No. 2 C.P. Cable Used
Volts 11.98	Amps 16.3	Ohms .735		

Remarks: DRILLED 1ST HOLE 500' WATER AT 80'. SET 3 ANODES THEN HOLE CAVED IN, LOST ALL 3 ANODES. MOVED 10' & DRILLED 2ND HOLE 500'. INSTALLED 10 ANODES & 505' OF 1" PVC VENT PIPE, PERFORATED BOTTOM 440'

* CAN FLOW AC FROM EXISTING AC (379-W)

Rectifier Size: 40 V 16 A
 Addn'l Depth: -
 Depth Credit: -
 Extra Cable: 960' .24
 Ditch & 1 Cable: 855' .70
 25' Meter Pole: -
 20' Meter Pole: -
 10' Stub Pole: -
 Junction Box: -

All Construction Completed

M. D. Williams
 (Signature)

GROUND BED LAYOUT SKETCH

