

1A = 30-045-22376
250 = 30-045-26899

3540

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL INC. Location: Unit F Sec. 2 Twp 30 Rng 9

Name of Well/Wells or Pipeline Serviced TURNER B COM #1A, #250
cps 2093w

Elevation 6027' Completion Date 2/10/89 Total Depth 320' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. 70' & 125' NO SAMPLE

Depths gas encountered: N/A

Type & amount of coke breeze used: N/A

Depths anodes placed: 305', 295', 285', 265', 255', 230', 220', 210', 200'

Depths vent pipes placed: 325'

Vent pipe perforations: 260'

Remarks: gb #2

RECEIVED
MAY 31 1989
OIL CONSERVATION
DISTRICT

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

Comp 2-14-89

Drilling Log (Attach Hereto) ☒

Completion Date 2-10-89

CPS #	Well Name, Line or Plant:	Work Order #	Static:	Ins. Union Check
2093-w	Turner "13" com #250	3277A	600' NE - .763	☒ Good ☐ Bad
Location:	Anode Size:	Anode Type:	Size Bit:	
F2-30-9	2" x 60"	Duriron	6 3/4"	
Depth Drilled	Depth Logged	Drilling Rig Time	Total Lbs. Goke Used	Lost Circulation Mat'l Used
320'	320'			
Anode Depth				
# 1 305'	# 2 295'	# 3 285'	# 4 275'	# 5 265'
# 6 255'	# 7 230'	# 8 220'	# 9 210'	# 10 200'
Anode Output (Amps)				
# 1 4.8	# 2 6.0	# 3 5.9	# 4 4.1	# 5 4.7
# 6 4.9	# 7 3.6	# 8 5.1	# 9 4.8	# 10 4.9
Anode Depth				
# 11	# 12	# 13	# 14	# 15
# 16	# 17	# 18	# 19	# 20
Anode Output (Amps)				
# 11	# 12	# 13	# 14	# 15
# 16	# 17	# 18	# 19	# 20
Total Circuit Resistance			No. 8 C.P. Cable Used	No. 2 C.P. Cable Used
Volts 11.81	Amps 23.4	Ohms .505		

Remarks: DRILLED 320', LOGGED 320'. WATER AT 70' + 125', NO
SAMPLE. INSTALLED 325' OF 1" PVC VENT PIPE, PERFORATED
BOTTOM 260'

* CAN پرو AC FROM 1268-w

Rectifier Size: 40 V 16 A

Addn'l Depth

Depth Credit: 180 3.50

Extra Cable: 640' .24

Ditch & 1 Cable: 745' .70

25' Meter Pole:_____

20' Meter Pole:_____

10' Stub Pole: _____

Junction Box: _____

4074.00

669.06

- 630.00 ✓

153.60

521.50

158.50

225.00

1210

5171.60
250.50


258.50
 543018

57-50.18 44

All Construction Completed

M. J. Williams
(Signature)

(Signature)

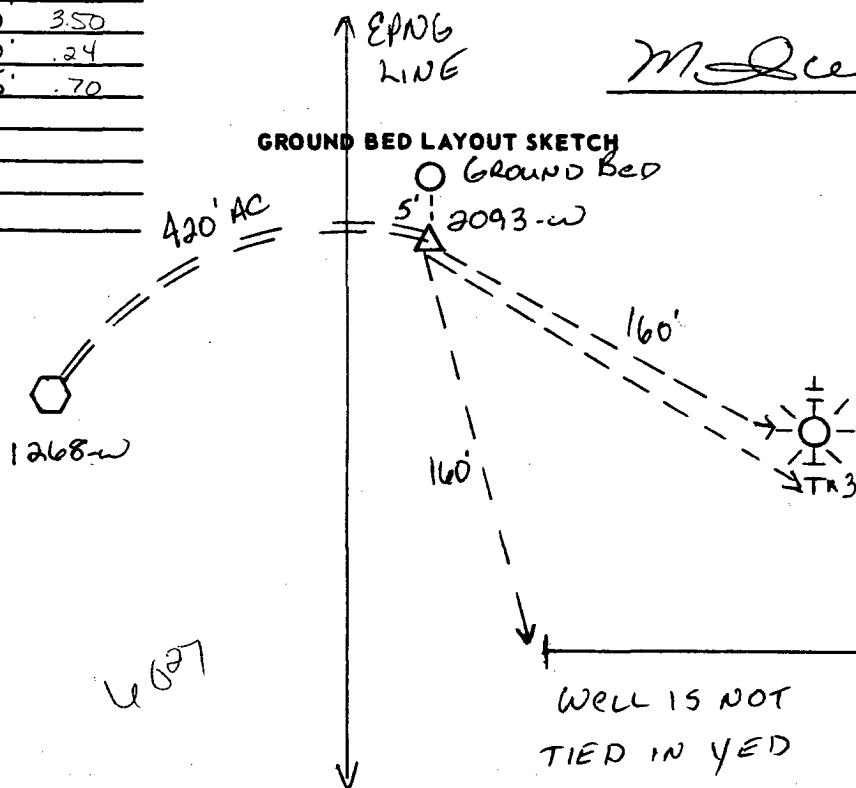

WELL IS NOT
TIED IN YED

D. CRASS DRILLING CO.

Drill No. 3

DRILLER'S WELL LOG

S. P. No. TURKEY B CORN #2500 Date 2-10-89
Client Meridian Oil Co. Prospect _____
County SAN JUAN State New Mex

If hole is a redrill or if moved from original staked position show distance
and direction moved: _____

FROM	TO	FORMATION — COLOR — HARDNESS
0	30	SANDSTONE
30	55	Shale
55	85	SAND
85	115	Shale
115	130	SAND
130	200	SANDSTONE
200	305	Shale
305	320	Shale

Mud _____ Bran _____ Lime _____

Rock Bit Number _____ Make _____

Remarks: Water @ 20' & 125'

Driller LONNIE BROWN