

26 = 30-039-07790
457 = 30-039-24235

3464

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL INC. Location: Unit M Sec. 19 Twp 30 Rng 6

Name of Well/Wells or Pipeline Serviced SAN JUAN 30-6 UNIT #26, #457

cps 2051w

Elevation 6198' Completion Date 10/27/88 Total Depth 350' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. 60'

Depths gas encountered: N/A

Type & amount of coke breeze used: N/A

Depths anodes placed: 250', 240', 220', 210', 195', 170', 130', 120', 110', 100'

Depths vent pipes placed: 350'

Vent pipe perforations: 290'

Remarks: gb #3

RECEIVED

MAY 31 1991

OIL CON. DIV.
DIST. 3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING CATHODIC PROTECTION CONSTRUCTION REPORT DAILY LOG

Comp 10-28-88

Drilling Log (Attach Hereto) ☐

Completion Date 10-27-88

CPS #	Well Name, Line or Plant:	Work Order #	Static:	Ina. Union Check						
2051W	San Juan 30-6 #457 #22	3146A	600'E = .959V	☒ Good ☐ Bad						
Location: 19-30-60	Anode Size: 2" x 60"	Anode Type: DUNN	Size Bar: 6 3/4							
Depth Drilled: 350'	Depth Logged: 350'	Drilling Rig Time	Total Lbs. Coke Used	Lost Circulation Mat'l Used						
No. Sacks Mud Used										
Anode Depth	#1 250	#2 240	#3 220	#4 210	#5 195	#6 170	#7 130	#8 120	#9 110	#10 100
Anode Output (Amps)	#1 4.6	#2 4.4	#3 3.3	#4 3.6	#5 3.9	#6 3.1	#7 3.1	#8 3.8	#9 4.7	#10 4.4
Anode Depth	#11	#12	#13	#14	#15	#16	#17	#18	#19	#20
Anode Output (Amps)	#11	#12	#13	#14	#15	#16	#17	#18	#19	#20
Total Circuit Resistance	Volts 12.08		Amps 18.5		Ohms .65		No. 8 C.P. Cable Used		No. 2 C.P. Cable Used	

Remarks: Water at 60'; static water next an at 40' sample taken. Installed 350' of 1" PVC vent pipe bottom 190' perforated. Rectifier on the San Juan 30-6 #26 to be used for D.C. power.

GA 4074.00


Rectifier Size: _____ V _____ A
 Addn'l Depth: _____
 Depth Credit: 150' @ 3.50 = 525.00 ✓
 Extra Cable: 310' @ .24 = 74.40 ✓
 Ditch & 1 Cable: 405' @ .10 = 203.50 ✓
 Ditch & 2 Cable: _____
 25' Meter Pole: _____
 20' Meter Pole: _____
 10' Stub Pole: _____
 Junction Box: 1 @ 225.00 = 225.00

10' surface casing
1 hr rig time

110.00
138.00
4379.90 ✓
tax 219.00 ✓
4598.90 or 92

All Construction Completed

Cahon Rockman
(Signature)

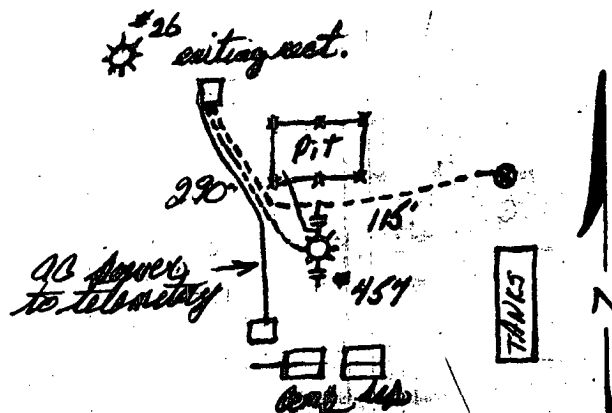

6198