

18 = 30-039-07856
486 = 30-039-24244

3488

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL INC. Location: Unit A Sec. 18 Twp 30 Rng 6

Name of Well/Wells or Pipeline Serviced SAN JUAN 30-6 UNIT #18, #456

cps 2055w

Elevation 6371' Completion Date 11/4/88 Total Depth 380' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used

N/A

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. 120'

Depths gas encountered: N/A

Type & amount of coke breeze used: N/A

Depths anodes placed: 350', 340', 330', 320', 300', 290', 280', 270', 260', 250'

Depths vent pipes placed: 375'

Vent pipe perforations: 255'

Remarks: gb #3

RECEIVED

MAY 31 1991

OIL CON. DIV.
DIST. ?

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

MERIDIAN OIL INC.
WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

Drilling Log (Attach Hereto) ☐

Comp 11-7-88 JD
Completion Date 11-4-88

CPS #	Well Name, Line or Plant: <u>Lan Olan 30-6 #456</u>	Work Order # <u>3187A</u>	State: <u>MOUSE - 534V</u>	Ins. Union Check ☐ Good ☒ Bad																																																																																																																								
<u>2055W</u>	<u>#15</u>			<u>1/2" x 3" union</u>																																																																																																																								
Location: <u>A18-30-6</u>	Anode Size: <u>2" x 60"</u>	Anode Type: <u>Fluorination</u>	Size Box: <u>63/4"</u>																																																																																																																									
Depth Drilled: <u>380'</u>	Depth Logged: <u>375'</u>	Drilling Rig Time	Total Lbs. Coke Used	Loss Circulation Mat'l Used																																																																																																																								
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td colspan="2">Anode Depth</td> <td># 1</td><td># 2</td><td># 3</td><td># 4</td><td># 5</td><td># 6</td><td># 7</td><td># 8</td><td># 9</td><td># 10</td> </tr> <tr> <td colspan="2"></td> <td>350</td><td>340</td><td>330</td><td>320</td><td>300</td><td>290</td><td>280</td><td>270</td><td>260</td><td>250</td> </tr> <tr> <td colspan="2">Anode Output (Amps)</td> <td># 1</td><td># 2</td><td># 3</td><td># 4</td><td># 5</td><td># 6</td><td># 7</td><td># 8</td><td># 9</td><td># 10</td> </tr> <tr> <td colspan="2"></td> <td>2.2</td><td>2.9</td><td>4.3</td><td>3.4</td><td>2.4</td><td>2.7</td><td>2.6</td><td>3.2</td><td>2.6</td><td>2.9</td> </tr> <tr> <td colspan="2">Anode Depth</td> <td># 11</td><td># 12</td><td># 13</td><td># 14</td><td># 15</td><td># 16</td><td># 17</td><td># 18</td><td># 19</td><td># 20</td> </tr> <tr> <td colspan="2"></td> <td>11</td><td>12</td><td>13</td><td>14</td><td>15</td><td>16</td><td>17</td><td>18</td><td>19</td><td>20</td> </tr> <tr> <td colspan="2">Anode Output (Amps)</td> <td># 11</td><td># 12</td><td># 13</td><td># 14</td><td># 15</td><td># 16</td><td># 17</td><td># 18</td><td># 19</td><td># 20</td> </tr> <tr> <td colspan="2"></td> <td>11</td><td>12</td><td>13</td><td>14</td><td>15</td><td>16</td><td>17</td><td>18</td><td>19</td><td>20</td> </tr> <tr> <td colspan="3">Total Circuit Resistance:</td> <td colspan="3">No. 8 C.P. Cable Used</td> <td colspan="3">No. 2 C.P. Cable Used</td> <td colspan="3"></td> </tr> <tr> <td colspan="3">Volts <u>12.67</u> Amps <u>12.9</u> Ohms <u>.98</u></td> <td colspan="3"></td> <td colspan="3"></td> <td colspan="3"></td> </tr> </table>					Anode Depth		# 1	# 2	# 3	# 4	# 5	# 6	# 7	# 8	# 9	# 10			350	340	330	320	300	290	280	270	260	250	Anode Output (Amps)		# 1	# 2	# 3	# 4	# 5	# 6	# 7	# 8	# 9	# 10			2.2	2.9	4.3	3.4	2.4	2.7	2.6	3.2	2.6	2.9	Anode Depth		# 11	# 12	# 13	# 14	# 15	# 16	# 17	# 18	# 19	# 20			11	12	13	14	15	16	17	18	19	20	Anode Output (Amps)		# 11	# 12	# 13	# 14	# 15	# 16	# 17	# 18	# 19	# 20			11	12	13	14	15	16	17	18	19	20	Total Circuit Resistance:			No. 8 C.P. Cable Used			No. 2 C.P. Cable Used						Volts <u>12.67</u> Amps <u>12.9</u> Ohms <u>.98</u>											
Anode Depth		# 1	# 2	# 3	# 4	# 5	# 6	# 7	# 8	# 9	# 10																																																																																																																	
		350	340	330	320	300	290	280	270	260	250																																																																																																																	
Anode Output (Amps)		# 1	# 2	# 3	# 4	# 5	# 6	# 7	# 8	# 9	# 10																																																																																																																	
		2.2	2.9	4.3	3.4	2.4	2.7	2.6	3.2	2.6	2.9																																																																																																																	
Anode Depth		# 11	# 12	# 13	# 14	# 15	# 16	# 17	# 18	# 19	# 20																																																																																																																	
		11	12	13	14	15	16	17	18	19	20																																																																																																																	
Anode Output (Amps)		# 11	# 12	# 13	# 14	# 15	# 16	# 17	# 18	# 19	# 20																																																																																																																	
		11	12	13	14	15	16	17	18	19	20																																																																																																																	
Total Circuit Resistance:			No. 8 C.P. Cable Used			No. 2 C.P. Cable Used																																																																																																																						
Volts <u>12.67</u> Amps <u>12.9</u> Ohms <u>.98</u>																																																																																																																												

Remarks: Water at 100'; sample taken. Installed 375' of 1" PVC vent pipe bottom 255' perforated.


G.B. 4874.00

Rectifier Size: <u>40</u> V <u>16</u> A	<u>669.00</u>
Add'l Depth: <u>0</u>	
Depth Credit: <u>125' @ 3.50</u>	<u>437.50</u>
Extra Cable: <u>285' @ .34</u>	<u>99.20</u>
Ditch & 1 Cable: <u>185' @ .70</u>	<u>129.50</u>
Ditch & 2 Cable: <u>0</u>	
25' Meter Pole: <u>1 @ 307.00</u>	<u>307.00</u>
20' Meter Pole: <u>0</u>	
10' Stub Pole: <u>0</u>	
Junction Box: <u>1 @ 255.00</u>	<u>255.00</u>

5016.90 5046.20
~~5016.90~~ ~~252.31~~ x
5269.01 5298.57 OK JD

All Construction Completed

Cahm Rodman
(Signature)

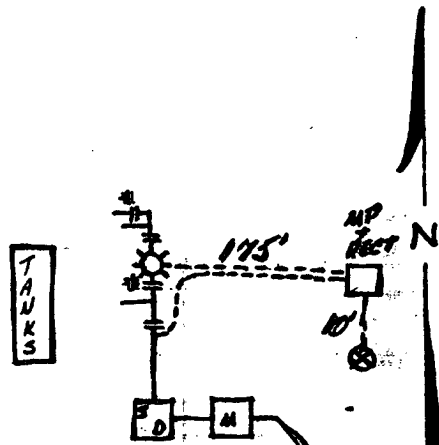

6371