

36-30-039-07886
430-30-039-24224

3484

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL INC. Location: Unit H Sec. 8 Twp 30 Rng 6

Name of Well/Wells or Pipeline Serviced SAN JUAN 30-6 UNIT #36, #430

cps 2056w

Elevation 6276' Completion Date 11/2/88 Total Depth 360' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used

N/A

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. 100'

Depths gas encountered: N/A

Type & amount of coke breeze used: N/A

Depths anodes placed: 275', 225', 215', 205', 180', 170', 160', 150', 140', 130'

Depths vent pipes placed: 360'

Vent pipe perforations: 260'

Remarks: gb #3

RECEIVED

MAY 31 1991

OIL CON. DIV.

DIST. 3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

Drilling Log (Attach Hereto) ☐

Comp 11-7-88 25
Completion Date 11-2-88

CPS #	Well Name, Line or Plant:	Work Order #	Static:	Ins. Union Check
3056W 30530	San Juan 30-6#430 #34	3150A	6005-.702	☐ Good ☒ Bad 15" x 3" unions
Location:	Anode Size:	Anode Type:	Size Bit:	
H 8-30-6	2" x 60"	Durum	6 3/4	
Depth Drilled	Depth Logged	Drilling Rig Time	Total Lbs. Cables Used	Loss Circulation Mat'l Used
360'	360'			
Anode Depth				
# 1 245	# 2 225	# 3 215	# 4 205	# 5 180
# 6 170	# 7 160	# 8 150	# 9 140	# 10 130
Anode Output (Amps)				
# 1 2.7	# 2 2.2	# 3 3.5	# 4 3.1	# 5 2.6
# 6 2.3	# 7 2.5	# 8 2.8	# 9 3.2	# 10 2.8
Anode Depth				
# 11	# 12	# 13	# 14	# 15
# 16	# 17	# 18	# 19	# 20
Anode Output (Amps)				
# 11	# 12	# 13	# 14	# 15
# 16	# 17	# 18	# 19	# 20
Total Circuit Resistance		No. 8 C.P. Cable Used		No. 2 C.P. Cable Used
Volts 12.20		Amps 12.5		Ohms .97

Remarks: 21 tests at 100', sample taken (static water). Installed 360' of 1" PVC vent pipe, bottom 360' perforated.

GB 4074.00 * = bad unions

Rectifier Size: _____ V _____ A

Add'l Depth _____

Depth Credit: 140' @ 3.50 - 490.00 ✓

Extra Cable: 275' @ .24 - 66.00 ✓

Ditch & 1 Cable: 420' @ .70 - 294.00 ✓

Ditch & 2 Cable: 0

25' Meter Pole: 0

20' Meter Pole: 0

10' Stub Pole: 0

Junction Box: 1 @ 225.00 - 225.00


4169.00 ✓

308.45 ✓

4377.45 OK 93

All Construction Completed

John Rodman
(Signature)

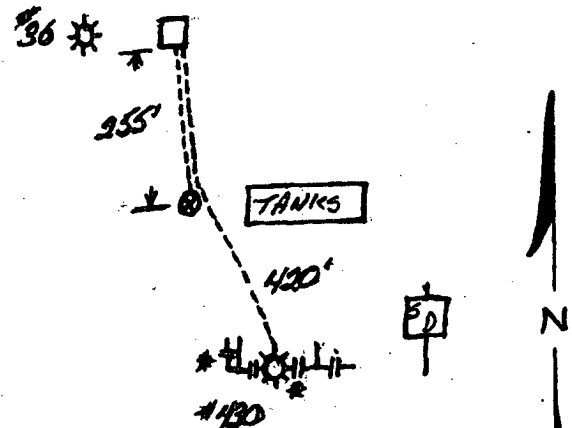

6276