

36 - 30-039-07886
430 - 30-039-24224

3485

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL INC. Location: Unit H Sec. 8 Twp 30 Rng 6

Name of Well/Wells or Pipeline Served SAN JUAN 30-6 UNIT #36, #430
cps 2056w

Elevation 6276' Completion Date 8/25/84 Total Depth 560' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. N/A

Depths gas encountered: N/A

Type & amount of coke breeze used: 9000 lbs.

Depths anodes placed: 499', 493', 487', 481', 475', 305', 262', 256'

Depths vent pipes placed: N/A

Vent pipe perforations: N/A

Remarks: gb #2

RECEIVED

MAY 31 1991

OIL CON.

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

Date 8-25-64

430

Well Name <u>San Juan 30-6 110-36</u>			CPS No. <u>182W 2052</u>		
Location <u>N/E 8-30-6</u>			Work Order No. <u>184-54087-90-54</u>		
Anode Hole Depth <u>560</u>	Total Drilling Rig Time <u>41 Hrs</u>	Type & Size Bit Used <u>107537-210</u> <u>6 1/4. 7711XX 450</u>		No. Sacks Mud Used <u>0</u>	
No. Sacks Lost Circulation Mat'l Used <u>0</u>	Anode Depth		7. <u>262</u>		8. <u>256</u>
# 1 <u>499</u>		# 2 <u>493</u>	# 3 <u>487</u>	# 4 <u>481</u>	# 5 <u>475</u>
Total Lbs. Coke Used <u>605ks = 9000</u>		Anode Output (Volts)		7. <u>1.8</u>	8. <u>2.5</u>
# 1 <u>1.6</u>		# 2 <u>2.0</u>	# 3 <u>2.2</u>	# 4 <u>2.1</u>	# 5 <u>2.0</u>
Total Circuit Resistance		No. Ft. Surface Cable Conduit			
Volts <u>12.0</u>	Amps <u>6.9</u>	Ohms <u>1.74</u>	<u>224'</u>		


Drilling Log (Attach Hereto). ☐

Remarks: 5 Anodes = 12.4 V 4.2 A
6 Anodes 12.2 V 5.0 A
7 Anodes = 12.2 V 5.8 A

All Construction Completed

Barrels
(Signature)

GROUND BED LAYOUT SKETCH

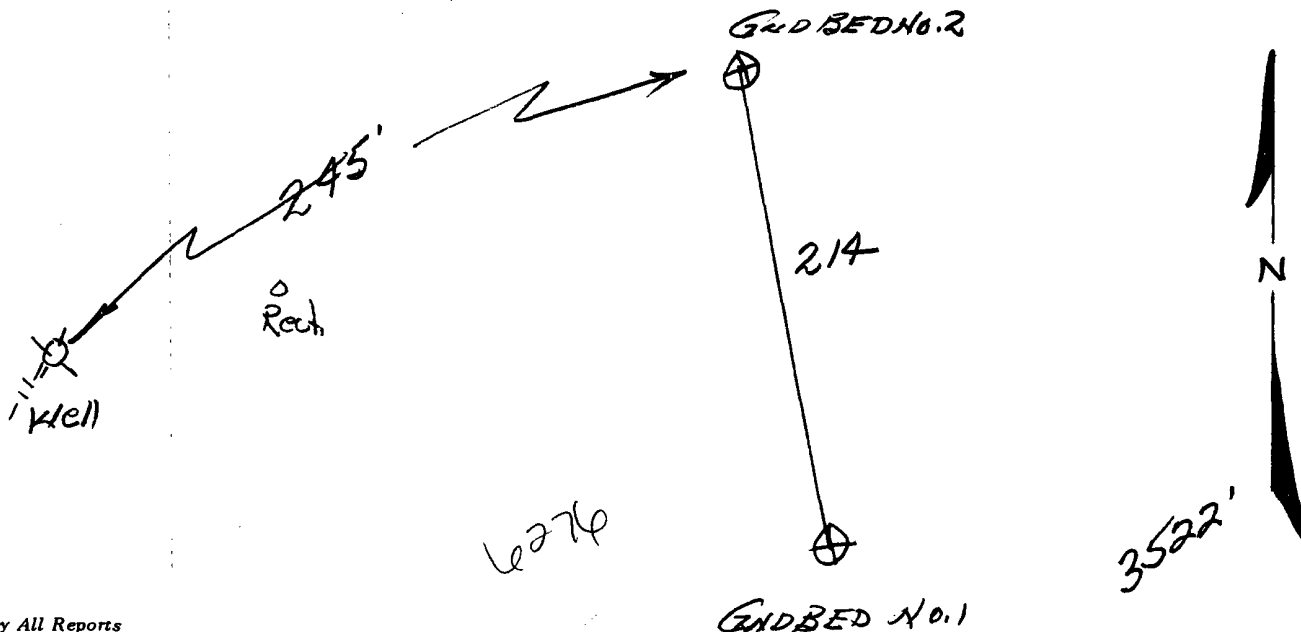

DAILY DRILLING REPORT

[illegible][illegible]

REMARKS -	REMARKS -
REMARKS -	REMARKS -

	Rig Time	41 hrs.
8-19-64 Drilled To 160' / Load Water. 6 hrs.		
8-20-64 Drilled From 160' To 380'. 3 Loads Water 10 hrs.		
8-21-64 " " 380' To 480'. 3 Loads Water 10 hrs.		
8-24-64 Drilled From 480' To 560'. Hard Sandstone. 10 hrs.		
8-25-64 Pump Test back in hole to Flush. Washed out + Moved. 5 hrs.		

SIGNED: Toolpusher _____ Company Supervisor _____