

3273
DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS

NORTHWESTERN NEW MEXICO

(Submit 3 copies to OCD Aztec Office)



Rincon Unit Well 223 30-039-22644 Rincon Unit Well 77 30-039-06791
Rincon Unit Well 229 30-039-22645Operator: UNOCAL – Bloomfield, NM Location: Unit P Sec. 34 Twp. 27N Rng. 7WName of Well/Wells or Pipeline Served: RINCON UNIT WELL: 223 CH/MV; 229 DK; 77 PCElevation: 6599 GR Completion Date: 10/24/95 Total Depth: 300' Land Type* FCasing, Sizes, Types & Depths: NONEIf Casing is cemented, show amounts & types used: NONEIf Cement or Bentonite Plugs have been placed, show depths & amounts used: NONEDepths & thickness of water zones with description of water when possible: NONEFresh, Clear, Salty, Sulfur, Etc.: NONEDepths gas encountered: NONEType & amount of coke breeze used: 2500 LBS., SWB METALURGICAL PETROLEUM COKEDepths anodes placed: 175' 185' 195' 205' 215' 225' 235' 245' 260' 270' 280' 290'Depths vent pipes placed: 0' – 300', 1" PVCVent pipe perforations: 1/8" PERFORATIONS FROM 100' TO 300'Remarks: SECOND GROUND BED INSTALLED ON THIS LOCATION.

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analysis & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F—Federal; I—Indian; S—State; P—Fee

If Federal or Indian, add Lease Number.

RECEIVED
FEB - 5 1996OIL CON. DIV.
DIST. 3

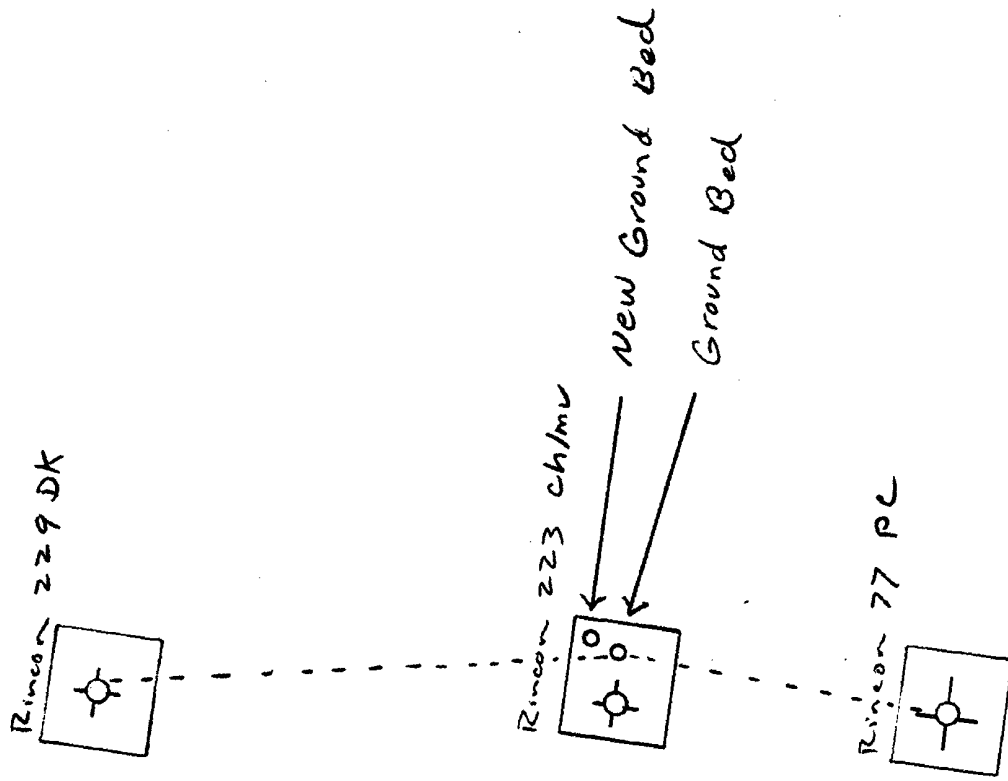

Rincon Unit 223 ch/mv
Rincon Unit 229 DK

COMPANY: Ymocal DATE: 10-24-95
 WELL: Rincon 223, 229, 27 PIPELINE:
 LOCATION: 1/4 1/4 SEC. 34-27-7 STATE: N.M.
 GROUND BED: DEPTH: 300 DIAMETER: 6 3/4 BACKFILL: Metallurgical ANODES TYPE: Duralin 51

DEPTH FT.	DRILLERS LOG	ANODE LOG			ANODE DEPTH	REMARKS
		I Logged	I Coted	R		
20	Blow Sand					
30	Shale					
40	Shale					
50	Sand Stone					
60	Sand Stone					
70	Sand Stone					
80	Sand Stone					
90	Shale					
100	Shale					
110	Shale					
120	Sand Stone					
130	Sand Stone					
140	Sandy Shale	.1				
150	Sandy Shale	.1				
160	Sandy Shale	.2				
170	Sandy Shale	.4	1.2		175'	
180	Sandy Shale	.2	1.2		185'	
190	Sandy Shale	.2	1.3		195'	
200	Sandy Shale	.4	1.4		205'	
210	Sandy Shale	.3	1.3		215'	
220	Sandy Shale	.5	1.3		225'	
230	Sandy Shale	.3	1.1		235'	
240	Sand Stone	.2	.9		245'	
250	Sand Stone	.1				
260	Sandy Shale	.4	1.4		260'	
270	Sandy Shale	.4	1.3		270'	
280	Sandy Shale	.3	1.2		280'	
290	Sandy Shale	.5	1.2		290'	
300	Sandy Shale	.4				
310						
320						
330						
340						
350						

NOTES:

POWER SOURCE: Battery VOLTS: 10.96INDICATE WATER ZONE DEPTHS anyCASING RUN: YES / ☒ NO TYPE: _____ DEPTH: _____ CEMENTED: YES / ☒ NOISOLATION PLUGS SET: YES / ☒ NO IF SO, WHERE: _____TOTAL: AMPS 3.7 RESISTANCE: 2.962

CON UNIT

