

3272

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS

NORTHWESTERN NEW MEXICO

(Submit 3 copies to OCD Aztec Office)

RUW#41 30-039-60090
 RUW#187 30-039-20161
 RUW#38 30-039-06874

Operator: UNOCAL - Bloomfield, NM Location: Unit A Sec. 26 Twp. 27N Rng. 7WName of Well/Wells or Pipeline Serviced: RINCON UNIT WELLS: 41 PC; 187 DK; 38 PCElevation: 6693 DF Completion Date: 10/23/95 Total Depth: 300' Land Type* FCasing, Sizes, Types & Depths: NONEIf Casing is cemented, show amounts & types used: NONEIf Cement or Bentonite Plugs have been placed, show depths & amounts used: NONE

Depths & thickness of water zones with description of water when possible: _____

WET SANDSTONE AT 110'Fresh, Clear, Salty, Sulfur, Etc.: NONEDepths gas encountered: NONEType & amount of coke breeze used: 2500 LBS., SWB METALURGICAL PETROLEUM COKEDepths anodes placed: 145' 160' 175' 190' 200' 210' 220' 230' 250' 260' 270' 280'Depths vent pipes placed: 0' - 300', 1" PVCVent pipe perforations: 1/8" PERFORATIONS FROM 100' TO 300'Remarks: SECOND GROUND BED INSTALLED ON THIS LOCATION.



If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analysis & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee

If Federal or Indian, add Lease Number.

RECEIVED
 FEB - 5 1996

OIL CON. DIV.
 DIST. 3

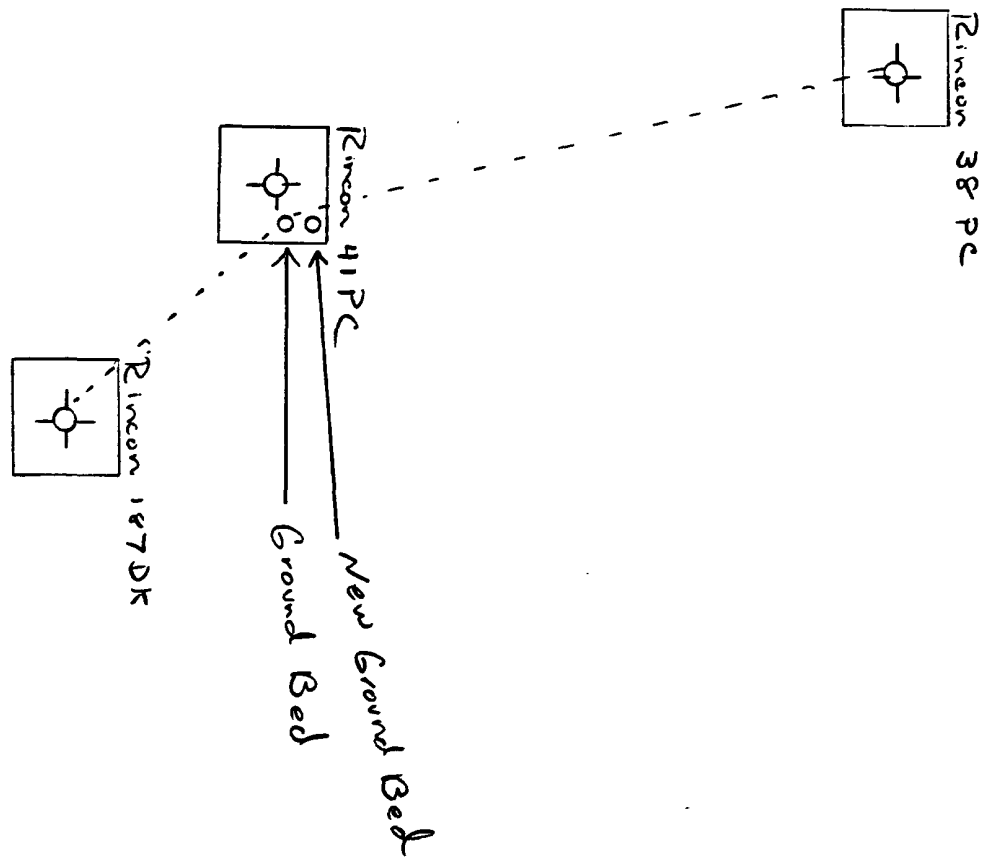

Rincon 41 PC
Rincon 38 PC
Rincon 187 DK

COMPANY: Unocal DATE: 10-23-95
 WELL: Rineer 41, 38, 187
 LOCATION: 14 14 SEC. 26-27-7 PIPELINE:
 STATE: W. M.
 GROUNDROD: DEPTH: 300' DIAMETER: 6 3/4" BACKFILL: Metallurgical ANODES TYPE: Durachlor 51

DEPTH FT.	DRILLERS LOG	ANODE LOG			ANODE DEPTH	REMARKS
		I Logged	I Coted	R		
20	Shale					
30	Shale					
40	Sand Stone					
50	Sand Stone					
60	Sand Stone					
70	Shale					
80	Shale					
90	Shale					
100	Sand Stone					
110	Sand Stone	.3				Wet Sand
120	Shale Stone	.3				
130	Sand Stone	.1				
140	Sandy Shale	.6	1.2		145'	
150	Sand Stone	.2				
160	Sandy Shale	.6	.9		160'	
170	Sand Stone	.3	.8		175'	
180	Sand Stone	.2				
190	Sandy Shale	.8	1.5		190'	
200	Shale	1.0	2.5		200'	
210	Shale	1.0	2.6		210'	
220	Shale	1.0	2.4		220'	
230	Sandy Shale	.8	1.9		230'	
240	Sand Stone	.1				
250	Sand Stone	.2	.9		250'	
260	Sand Stone	.2	.8		260'	
270	Sand Stone	.2	.5		270'	
280	Sand Stone	.2	.5		280'	
290	Sand Stone	.2				
300	Sand Stone	.2				
310						
320						
330						
340						
350						

NOTES:

POWER SOURCE: Battery VOLTS: 9.94
 INDICATE WATER ZONE DEPTHS 110'
 CASING RUN: YES / ☒ NO TYPE: _____ DEPTH: _____ CEMENTED: YES / ☒ NO
 ISOLATION PLUGS SET: YES / ☒ NO IF SO, WHERE: _____
 TOTAL: AMPS 4.6 RESISTANCE: 2.161

ON UNIT

