

3491

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO

30-039-22273

(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL INC. Location: Unit C Sec. 7 Twp 26 Rng 5

Name of Well/Wells or Pipeline Serviced JICARILLA 152W #1A

cps 2010w

Elevation 6626' Completion Date 10/10/88 Total Depth 340' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. 40'

Depths gas encountered: N/A


Type & amount of coke breeze used: N/A

Depths anodes placed: 275', 265', 215', 205', 195', 185', 175', 165', 155', 115'

Depths vent pipes placed: 320'

Vent pipe perforations: 300'

Remarks: gb- #1



MAY 31 1991.

OIL CON. DIV

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

MERIDIAN OIL INC.
WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

10-11-88
computer
JP

Drilling Log (Attach Here) ☐

Completion Date 10/10/88

CPS #	Well Name, Line or Plant:	Work Order #	Status:	Ins. Union Check
2010 W	JICARILLA 152W "1A	40583A	.70V 600 E	☒ Good ☐ Bad
Location: C-7-26-5 Anode Size: 2" X 60" Anode Type: DUTROUX Size Box: 6 3/4"				
Depth Drilled: 340'	Depth Logged: 320'	Drilling Rig Time	Total Lbs. Coils Used	Loss Circulation Mat'l Used
Anode Depth				
# 1 275	# 2 265	# 3 215	# 4 205	# 5 195
# 6 185	# 7 175	# 8 165	# 9 155	# 10 115
Anode Output (Amps)				
# 1 4.0	# 2 4.6	# 3 4.8	# 4 6.5	# 5 4.6
# 6 4.2	# 7 4.3	# 8 4.4	# 9 4.3	# 10 4.2
Anode Depth				
# 11	# 12	# 13	# 14	# 15
# 16	# 17	# 18	# 19	# 20
Anode Output (Amps)				
# 11	# 12	# 13	# 14	# 15
# 16	# 17	# 18	# 19	# 20
Total Circuit Resistance			No. 8 C.P. Cable Used	No. 2 C.P. Cable Used
Volts 11.95	Amps 22.0	Ohms .54		


Remarks: WATER AT 40', TOOK WATER SAMPLE. INSTALLED 320' of 1" P.V.C. VENT pipe, perforated 300'.
Layed 1/2" FUEL LINE, IN WIRE DITCH.

G.B. 4170.00
Rectifier Size: T.E.G. V A 7695.00
Addn'l Depth _____
Depth Credit: - 180' 3.50 - 630.00 ✓
Extra Cable: 145' 29 36.25 ✓
Ditch & 1 Cable: 125' 75 93.75 ✓
Ditch & 2 Cable: _____
25' Meter Pole: _____
20' Meter Pole: _____
10' Stub Pole: _____
Junction Box: 1 249.00

11614.00 ✓
TAX 580.70 ✓
TOTAL \$12194.70 OK 93

All Construction Completed

JP Stoltz
(Signature)

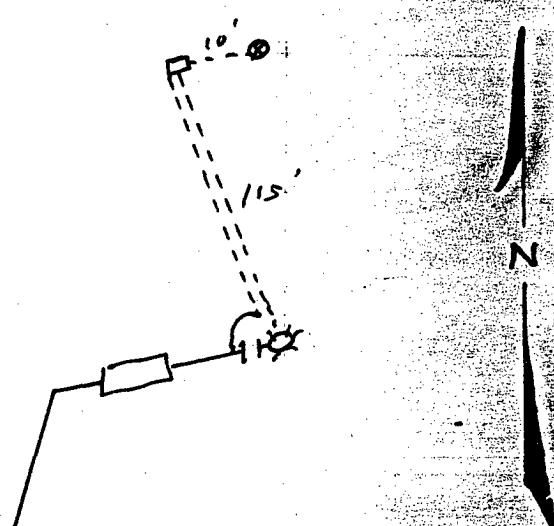

6624

2010

D. CRASS DRILLING CO.Drill No. 3

DRILLER'S WELL LOG

S. P. No. Jucarilla 152W #12 Date 10-10-88
 Client Meridian Oil Co. Prospect _____
 County Rio Arriba State New Mex.

If hole is a redrill or if moved from original staked position show distance
 and direction moved: _____

FROM	TO	FORMATION — COLOR — HARDNESS
0	40	SAND
40	50	Shale
50	70	SANDSTONE
70	140	SANDY SHALE
140	150	SANDSTONE
150	200	Shale
200	210	SANDY SHALE
210	240	Shale
240	260	SANDSTONE
260	290	Shale
290	340	SANDSTONE

Mud _____ Brn _____ Lime _____

Rock Bit Number _____ Make _____

Remarks: Water @ 40'Driller Ronnie Brown