

3492

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO

30-039-23792

(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL INC. Location: Unit G Sec. 31 Twp 27 Rng 7

Name of Well/Wells or Pipeline Serviced HARRINGTON #7

cps 2009

Elevation 6629' Completion Date 10/7/88 Total Depth 520' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. DAMP 100' - 200' NO WATER

Depths gas encountered: N/A

Type & amount of coke breeze used: N/A

Depths anodes placed: 475', 468', 461', 454', 448', 441', 435', 365', 340', 330'

Depths vent pipes placed: 510'

Vent pipe perforations: 400'

Remarks: gb #1

RECEIVED
MAY 31 1991
OIL CON. DIV.
DIST.

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

MERIDIAN OIL INC.
WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

Comp 10 W 88
85

Drilling Log (Attach Here) ☐

Completion Date 10/7/88


Well Name, Line or Plant:	Work Order #	Static:	Ins. Union Check
2009W	HARRIS TOW #7	54304A	.74V 600 N.
Anode Size: 2" x 60"		Anode Type: DURATION	Size Set: 6 3/4"
Captn Drilled: 520'	Depth Logged: 516'	Drilling Rig Time	Total Lbs. Coke Used
Anode Depth		Lost Circulation Mat'l Used	
No. Sacks Mat'l Used			
Anode Output (Amps)			
Anode Depth			
Anode Output (Amps)			
Total Circuit Resistance		No. 8 C.P. Cable Used	
Volts 12.03		Amps 15.7	
Ohms .8		No. 2 C.P. Cable Used	

Remarks: Hole was damp between 100' & 200', in several spots, could not get it to make water. Installed 516' of 1" vent pipe, perforated 400'.
Layed 1/2" Fuel line in wire ditch

G.B. 4170.00
Rectifier Size: T.E. 6. 7695.00
Addn'l Depth: +10 75.00 ✓
Depth Credit:
Extra Cable: 185' x .25 46.25 ✓
Ditch & 1 Cable: 170' x .75 127.50 ✓
Ditch & 2 Cable:
25' Meter Pole:
20' Meter Pole:
10' Stub Pole:
Junction Box: 1 249.00
12362.75 ✓
TAX 618.14
TOTAL 12980.89 OK

All Construction Completed

JE Stotts
(Signature)

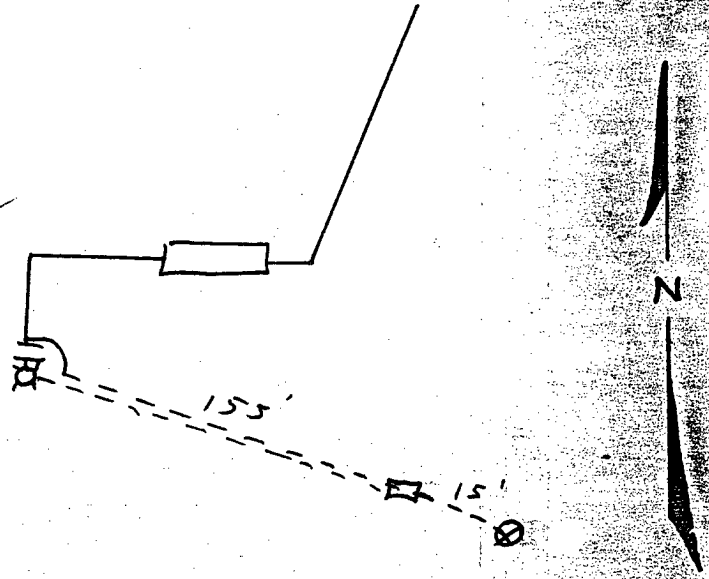

2009
O. CIASS DRILLING CO.

Drill No. 3

DRILLER'S WELL LOG

S. P. No. HARRINGTON #7 Date 10-7-88
Client Meridian Oil Co. Prospect _____
County SAN JUAN State New Mex.

If hole is a redrill or if moved from original staked position show distance
and direction moved: _____

FROM	TO	FORMATION — COLOR — HARDNESS
0	220	SANDstone
220	240	SANDy shale
240	260	shale
260	270	SANDstone
270	290	shale
290	325	SANDstone
325	335	shale
335	450	SANDstone
450	480	shale
480	520	SANDstone

Mud _____ Brm _____ Lime _____

Rock Bit Number _____ Make _____

Remarks: _____

Driller Lonnie Brown