

3493

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO

(Submit 3 copies to OCD Aztec Office)

30-039-23871

Operator MERIDIAN OIL INC. Location: Unit K Sec. 31 Twp 27 Rng 7Name of Well/Wells or Pipeline Serviced HARRINGTON #6

cps 2008w

Elevation 6001' Completion Date 10/6/88 Total Depth 280' Land Type* N/ACasing, Sizes, Types & Depths N/AIf Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used

N/A

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. 50' NO SAMPLEDepths gas encountered: N/AType & amount of coke breeze used: N/ADepths anodes placed: 235', 228', 220', 175', 168', 155', 135', 112', 105', 95'Depths vent pipes placed: 278'Vent pipe perforations: 240'Remarks: gb #1RECEIVED
MAY 31 1991OIL CON. DIV.
DIST. 3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

AMERICAN OIL INC.
WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

Comp 10-0-88
82

Drilling Log (Attach Hereto) ☐

Completion Date 10/6/88

CPS #	Well Name, Line or Plant:	Work Order #	State:	Ins. Union Check:
2008 W	HARRINGTON #6	54257A		☐ Good ☒ Bad NEED 2 UNIONS INSTALLED AT WELL
Location:	Anode Size:	Anode Type:	Size Box:	
15-31-27-7	2" X 60"	DURION	6 3/4"	
Depth Drilled	Depth Logged	Drilling Rig Time	Total Lbs. Cable Used	Lost Circulation Mat'l Used
280	278			
Anode Depth				
#1 235	#2 228	#3 220	#4 175	#5 168
#6 155	#7 135	#8 112	#9 105	#10 95
Anode Output (Amps)				
#1 2.0	#2 2.9	#3 2.0	#4 3.0	#5 3.0
#6 2.4	#7 2.5	#8 2.4	#9 4.6	#10 4.5
Anode Depth				
#11	#12	#13	#14	#15
#16	#17	#18	#19	#20
Anode Output (Amps)				
#11	#12	#13	#14	#15
#16	#17	#18	#19	#20
Total Circuit Resistance			No. 8 C.P. Cable Used	No. 2 C.P. Cable Used
Volts 12.4	Amps 14.8	Ohms .84		


Remarks: HAD LOTS of WATER AT 50'; DID NOT GET WATER SAMPLE
BECAUSE WE DRILLED WITH MUD. (IN LARGO) INSTALLED 278' of 1" P.O.C.
VENT pipe, Perforated @ 240'. LAYED 1/2" FUEL GAS LINE IN
WIRE ditch.

G.B. \$4170.00
Rough Size T.L.G. V A 7695.00
Addn'l Depth _____
Depth Credit: - 222' x 3.50 - 777.00 ✓
Extra Cable: 230' x 2.5 57.50 ✓
Ditch & 1 Cable: 210' x .75 157.50 ✓
Ditch & 2 Cable: _____
25' Meter Pole: _____
20' Meter Pole: _____
10' Stub Pole: _____
Junction Box: 1 249.00

11552.00
TAX @ 5% 577.60
TOTAL 12129.60 OK 82

All Construction Completed

(Signature)

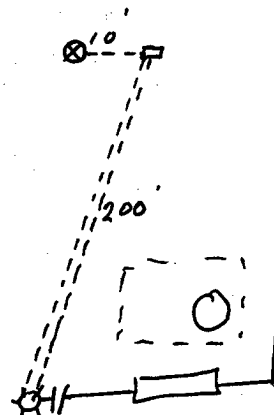

6001

2008

Darrell Crass Drilling

Drill No. 3

Well No. Harrington #6-MV

Client Meridian Oil Co.

Date 10-6-88

County SAN JUAN

State New Mexico

0-30 SAND

30-55 GRAVEL

55-65 CLAY

65-80 SANDSTONE

80-140 CLAY

140-155 SANDSTONE

155-200 CLAY

200-220 SANDSTONE

220-235 CLAY

235-280 SANDSTONE

Driller Ronnie Brown

Water @ 50'