

3474

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO

30-039-24248

(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL INC. Location: Unit K Sec. 34 Twp 30 Rng 7Name of Well/Wells or Pipeline Serviced SAN JUAN 30-6 UNIT #426

cps 2063w

Elevation 6230' Completion Date 12/20/88 Total Depth 400' Land Type* N/ACasing, Sizes, Types & Depths N/AIf Casing is cemented, show amounts & types used N/AIf Cement or Bentonite Plugs have been placed, show depths & amounts used
N/ADepths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. 90'Depths gas encountered: N/AType & amount of coke breeze used: N/ADepths anodes placed: 290', 280', 270', 263', 257', 246', 238', 230', 195', 185'Depths vent pipes placed: 398'Vent pipe perforations: 300'Remarks: gb #1**RECEIVED**
MAY 31 1991
OIL CON. DIV
DIST. 2

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

Comp.
12-22-88
NFO.

Drilling Log (Attach Hereto) ☐Completion Date 12/20/88

CPS #	Well Name, Line or Plant:	Work Order #	Static:	Ins. Union Check																																																							
2063 W	30-6 "426	3190A	.71V 600' W	☒ Good ☐ Bad																																																							
Location: K-34-30-7	Anode Size: 2" X 60"	Anode Type: DURION	Size Bit: 6 3/4"																																																								
Depth Drilled 400'	Depth Logged 398'	Drilling Rig Time	Total Lbs. Coke Used	Lost Circulation Mat'l Used																																																							
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>Anode Depth</td> <td># 1 290</td> <td># 2 280</td> <td># 3 270</td> <td># 4 262</td> <td># 5 254</td> <td># 6 246</td> <td># 7 238</td> <td># 8 230</td> <td># 9 195</td> <td># 10 185</td> </tr> <tr> <td>Anode Output (Amps)</td> <td># 1 3.3</td> <td># 2 3.3</td> <td># 3 2.8</td> <td># 4 2.8</td> <td># 5 2.9</td> <td># 6 2.9</td> <td># 7 3.2</td> <td># 8 2.7</td> <td># 9 3.2</td> <td># 10 3.7</td> </tr> <tr> <td>Anode Depth</td> <td># 11</td> <td># 12</td> <td># 13</td> <td># 14</td> <td># 15</td> <td># 16</td> <td># 17</td> <td># 18</td> <td># 19</td> <td># 20</td> </tr> <tr> <td>Anode Output (Amps)</td> <td># 11</td> <td># 12</td> <td># 13</td> <td># 14</td> <td># 15</td> <td># 16</td> <td># 17</td> <td># 18</td> <td># 19</td> <td># 20</td> </tr> <tr> <td>Total Circuit Resistance</td> <td colspan="2">Volts 1200</td> <td colspan="2">Amps 11.5</td> <td colspan="2">Ohms 1.05</td> <td colspan="2">No. 8 C.P. Cable Used</td> <td colspan="2">No. 2 C.P. Cable Used</td> </tr> </table>					Anode Depth	# 1 290	# 2 280	# 3 270	# 4 262	# 5 254	# 6 246	# 7 238	# 8 230	# 9 195	# 10 185	Anode Output (Amps)	# 1 3.3	# 2 3.3	# 3 2.8	# 4 2.8	# 5 2.9	# 6 2.9	# 7 3.2	# 8 2.7	# 9 3.2	# 10 3.7	Anode Depth	# 11	# 12	# 13	# 14	# 15	# 16	# 17	# 18	# 19	# 20	Anode Output (Amps)	# 11	# 12	# 13	# 14	# 15	# 16	# 17	# 18	# 19	# 20	Total Circuit Resistance	Volts 1200		Amps 11.5		Ohms 1.05		No. 8 C.P. Cable Used		No. 2 C.P. Cable Used	
Anode Depth	# 1 290	# 2 280	# 3 270	# 4 262	# 5 254	# 6 246	# 7 238	# 8 230	# 9 195	# 10 185																																																	
Anode Output (Amps)	# 1 3.3	# 2 3.3	# 3 2.8	# 4 2.8	# 5 2.9	# 6 2.9	# 7 3.2	# 8 2.7	# 9 3.2	# 10 3.7																																																	
Anode Depth	# 11	# 12	# 13	# 14	# 15	# 16	# 17	# 18	# 19	# 20																																																	
Anode Output (Amps)	# 11	# 12	# 13	# 14	# 15	# 16	# 17	# 18	# 19	# 20																																																	
Total Circuit Resistance	Volts 1200		Amps 11.5		Ohms 1.05		No. 8 C.P. Cable Used		No. 2 C.P. Cable Used																																																		

Remarks: WATER AT 90' & 185'. WATER SAMPLE WOULD NOT SETTLE OUT. I INSTALLED 398' OF 1" P.V.C. VENT PIPE, PERFORATED 300'.


G.B. 4074.00


Rectifier Size:	40V	16A	669.00
Add'l Depth:	0		
Depth Credit:	-102'3.50		-357.00 ✓
Extra Cable:	250.24		60.00 ✓
Ditch & 1 Cable:	230.70		161.00 ✓

25' Meter Pole:	<u>1</u>	
20' Meter Pole:	<u>1</u>	
10' Stub Pole:	<u>1</u>	158.50 ✓
Junction Box:	<u>1</u>	225.00 ✓

~~4990.50~~ ✓
~~249.53~~ ✓
 \$5240.03 OK 93

All Construction Completed

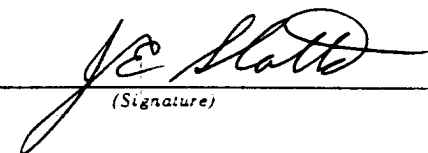
 (Signature)

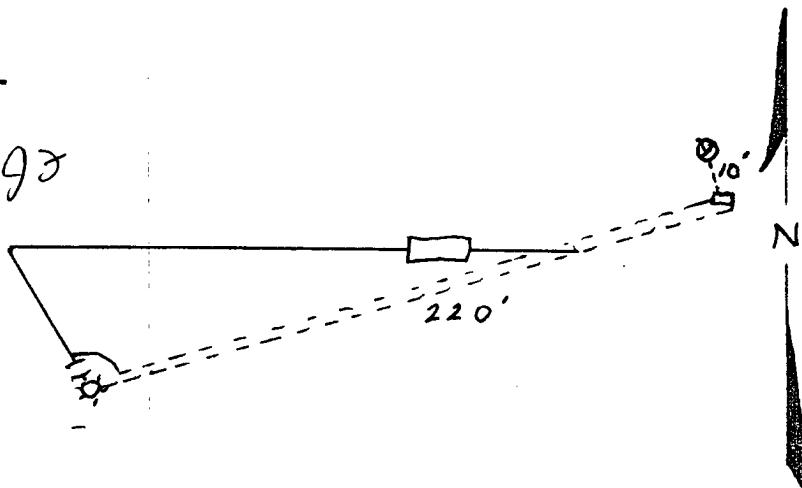

6230

DRILLING CO.

Drill No. 10

DRILLER'S WELL LOG

S. P. No. SS 30-6 426 Date _____

Client _____ Prospect _____

County _____ State _____

If hole is a redrill or if moved from original staked position show distance and direction moved: _____

FROM	TO	FORMATION — COLOR — HARDNESS
0	10	Sandy clay
10	40	Broken sandstone
40	90	Shale
90	110	Pebbly sand
110	150	Shale
150	190	Sand
190	300	Shale
300	400	Sandy shale & shale etc

Mud _____ Bran _____ Lime _____

Rock Bit Number _____ Make _____

Remarks: Pebbly sand 90' to 185'

Driller Jerry