

#2 → 30-045-25395
#101 → 30-045-26942

3468

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL INC. Location: Unit F Sec. 32 Twp 32 Rng 8

Name of Well/Wells or Pipeline Serviced RATTLESNAKE CANYON #2, #101

cps 2048w

Elevation 6532' Completion Date 10/18/88 Total Depth 440' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. 120' & 200'

Depths gas encountered: N/A

Type & amount of coke breeze used: N/A

Depths anodes placed: 415', 405', 395', 385', 375', 300', 290', 280', 270', 260'

Depths vent pipes placed: 440'

Vent pipe perforations: 320'

Remarks: gb #1

RECEIVED

MAY 31 1991

OIL CON. DIV

DIST. 3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

MERIDIAN OIL INC.
WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

Comp 10-24-88

Drilling Log (Attach Hereto) ☐

Completion Date 10-18-88

CPS #	Well Name, Line or Plot: <u>Rattlesnake #101</u>	Work Order #	State: <u>SW 40' = .832V</u>	Ins. Union Check																																								
<u>2048W</u>	<u>#2</u>	<u>3141A</u>		☒ Good ☐ Bad																																								
Location: <u>F 32-30-8</u>	Anode Size: <u>2" x 60"</u>	Anode Type: <u>Duriron</u>	Size Bat: <u>6 3/4</u>																																									
Depth Drilled: <u>440'</u>	Depth Logged: <u>440'</u>	Drilling Rig Time	Total Lbs. Cable Used	Low Circulation Mat'l Used																																								
<table border="1"> <tr> <td colspan="2">Anode Depth</td> <td colspan="2">Anode Output (Amps)</td> </tr> <tr> <td>#1 <u>415</u></td> <td>#2 <u>405</u></td> <td>#3 <u>395</u></td> <td>#4 <u>385</u></td> </tr> <tr> <td>#5 <u>375</u></td> <td>#6 <u>300</u></td> <td>#7 <u>290</u></td> <td>#8 <u>280</u></td> </tr> <tr> <td>#9 <u>270</u></td> <td>#10 <u>260</u></td> <td colspan="2"></td> </tr> <tr> <td colspan="2">Anode Depth</td> <td colspan="2">Anode Output (Amps)</td> </tr> <tr> <td>#11</td> <td>#12</td> <td>#13</td> <td>#14</td> </tr> <tr> <td>#15</td> <td>#16</td> <td>#17</td> <td>#18</td> </tr> <tr> <td>#19</td> <td>#20</td> <td colspan="2"></td> </tr> <tr> <td colspan="2">Total Circuit Resistance</td> <td colspan="2">No. 8 C.P. Cable Used</td> </tr> <tr> <td>Volts: <u>12.22</u></td> <td>Amps: <u>12.8</u></td> <td>Ohms: <u>.95</u></td> <td>No. 2 C.P. Cable Used</td> </tr> </table>					Anode Depth		Anode Output (Amps)		#1 <u>415</u>	#2 <u>405</u>	#3 <u>395</u>	#4 <u>385</u>	#5 <u>375</u>	#6 <u>300</u>	#7 <u>290</u>	#8 <u>280</u>	#9 <u>270</u>	#10 <u>260</u>			Anode Depth		Anode Output (Amps)		#11	#12	#13	#14	#15	#16	#17	#18	#19	#20			Total Circuit Resistance		No. 8 C.P. Cable Used		Volts: <u>12.22</u>	Amps: <u>12.8</u>	Ohms: <u>.95</u>	No. 2 C.P. Cable Used
Anode Depth		Anode Output (Amps)																																										
#1 <u>415</u>	#2 <u>405</u>	#3 <u>395</u>	#4 <u>385</u>																																									
#5 <u>375</u>	#6 <u>300</u>	#7 <u>290</u>	#8 <u>280</u>																																									
#9 <u>270</u>	#10 <u>260</u>																																											
Anode Depth		Anode Output (Amps)																																										
#11	#12	#13	#14																																									
#15	#16	#17	#18																																									
#19	#20																																											
Total Circuit Resistance		No. 8 C.P. Cable Used																																										
Volts: <u>12.22</u>	Amps: <u>12.8</u>	Ohms: <u>.95</u>	No. 2 C.P. Cable Used																																									


Remarks: Water was at 120' + 200'; sample taken. Installed
440' of 1" PVC vent pipe, bottom 320' perforated. Hole
logged good, finals showed high resistance

Rectifier Size: 40 V 16 A 669.00 ✓
 Addn'l Depth: 40' @ 3.50 - 210.00 ✓
 Depth Credit: 60' @ .24 60.00 ✓
 Extra Cable: 250' @ .24 494.00 ✓
 Ditch & 1 Cable: 710' @ .70 494.00 ✓
 Ditch & 2 Cable: 0
 25' Meter Pole: 0
 20' Meter Pole: 0
 10' Stub Pole: 1 @ 158.50 158.50 ✓
 Junction Box: 1 @ 225.00 225.00 ✓

tax 5443.50 ✓
273.68 ✓
5747.18 ✓

All Construction Completed

Charles Rodman
 (Signature)

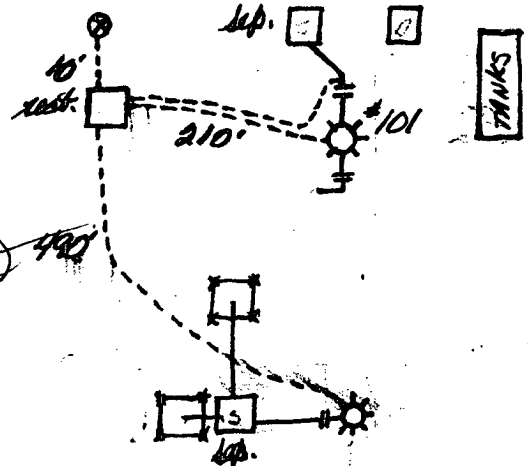

6532