

454 30-039-07336

102- 30-039- 07316

4838

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit A Sec. 26 Twp 28 Rng 6

Name of Well/Wells or Pipeline Serviced SAN JUAN 28-6 UNIT #45, #102

cps 722w

Elevation 6576' Completion Date 7/1/87 Total Depth 380' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used

N/A

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. 40', 140', 190'

Depths gas encountered: N/A

Type & amount of coke breeze used: N/A

Depths anodes placed: 320', 310', 265', 255', 245', 210', 200', 190', 180', 170'

Depths vent pipes placed: N/A

Vent pipe perforations: UP TP 100'

Remarks: gb #2

RECEIVED
MAY 31 1991
OIL CON. DIV.
DIST. 3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

**WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG**

on computer ✓

Drilling Log (Attach Hereto) ☐

Completion Date 7-1-87

*meter 102-73-72265
#45 - 86-0565*

CPS #	Well Name, Line or Plant:	Work Order #	Static:	Ins. Union Check
722W	S.T. 28-6 #102 S.T. 28-6 #45	20519.80-90 40010.39-90	.82 - 74	☒ Good ☐ Bad
Location:	Anode Size:	Anode Type:	Size Bit:	
A26-28-6	2" x 60"	Duriron	6 3/4"	
Depth Drilled	Depth Logged	Drilling Rig Time	Total Lbs. Gels Used	Lost Circulation Mat'l Used
380'	370'	6 1/2 hrs		
Anode Depth				
#1 320' #2 310' #3 265' #4 255' #5 245' #6 210' #7 200' #8 190' #9 180' #10 170'				
Anode Output (Amps)				
#1 3.9 #2 4.2 #3 5.0 #4 4.7 #5 5.9 #6 2.8 #7 4.5 #8 4.6 #9 4.3 #10 4.6				
Anode Depth				
#11 #12 #13 #14 #15 #16 #17 #18 #19 #20				
Anode Output (Amps)				
#11 #12 #13 #14 #15 #16 #17 #18 #19 #20				
Total Circuit Resistance			No. 8 C.P. Cable Used	No. 2 C.P. Cable Used
Volts 11.7 Amps 17.1 Ohms .68				



Remarks: Hit some water at 40'. Hit some more water at 190'. No water sample was taken. Also had some water at 140'. Vent pipe perforated up to 100'.

Rectifier Size: V A
 Addn'l Depth:
 Depth Credit: 130'
 Extra Cable: 10'
 Ditch & 1 Cable: 80'
 Ditch & 2 Cable:
 25' Meter Pole:
 20' Meter Pole:
 10' Stub Pole:
 Junction Box: 1

4300
- 520
2.50
31.20
40.00
3853.70
Tx 192.69
4046.39

All Construction Completed

Handwritten Signature
(Signature)

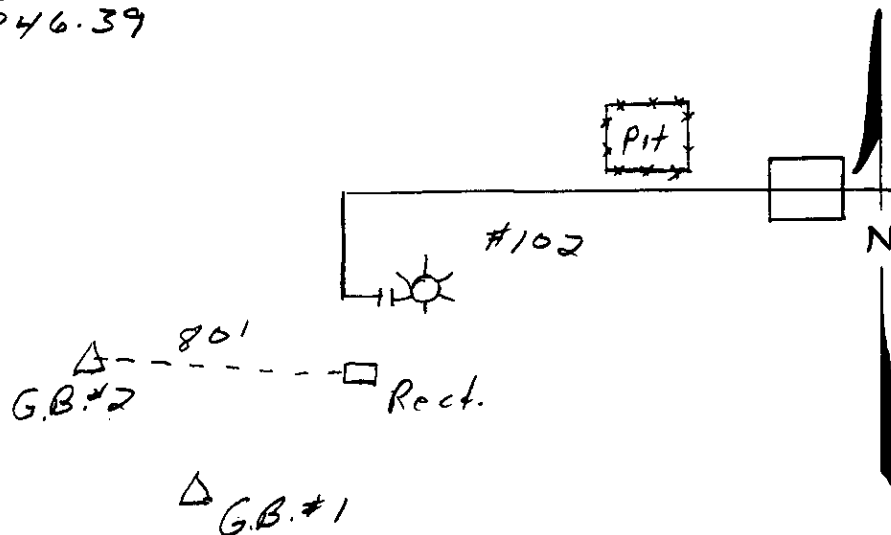

OPS 722 W

COMPANY Meridian Oil **DAILY DRILLING REPORT** July 1, 1987

[illegible]

REMARKS: _____

Kevin Buzze

Driller

Tool Dresser

Date 7-1-87

Company

Well No.

Location

- Volts Applied

Ampere[illegible]