

#4 → 30-045-07942

#6 → 30-045-21090

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit SW Sec. 22 Twp 29 Rng 8

Name of Well/Wells or Pipeline Serviced ROELOFS A #4, #6

cps 862w

Elevation 6398' Completion Date 10/3/69 Total Depth 660' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used

N/A

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. 115' - 130'

Depths gas encountered: N/A

Type & amount of coke breeze used: 8700 lbs.

Depths anodes placed: 643', 612', 606', 577', 519', 502', 416', 410', 329'

Depths vent pipes placed: 621' OF 3/4" HOSE

Vent pipe perforations: 612'

Remarks: Ggb #3

Handwritten: Ggb #1 + #2 Retired

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

RECEIVED

MAY 31 1991

OIL CON. DIV.
DET.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

-5" # 78594 = 320
66647 = 340

Drilling Log (Attach Hereto) ☐

Completion Date 10-3-69

Well Name <u>Roclofs #4A</u>		Location <u>SW 22-29-8</u>		CPS No. <u>862W</u>	
Type & Size Bit Used <u>7 7/8 - 78594 = 660 V F 109 = 660</u>				Work Order No. <u>184-52298-50-20</u>	
Anode Hole Depth <u>660</u>	Total Drilling Rig Time <u>63</u>	Total Lbs. Coke Used <u>8700</u>	Lost Circulation Mat'l Used <u>0</u>	No. Sacks Mud Used <u>8</u>	
Anode Depth					
# 1 <u>643</u>	# 2 <u>612</u>	# 3 <u>606</u>	# 4 <u>577</u>	# 5 <u>519</u>	# 6 <u>502</u>
# 7 <u>416</u>	# 8 <u>410</u>	# 9 <u>329</u>	# 10		
Anode Output (Amps)					
# 1 <u>2.7</u>	# 2 <u>2.5</u>	# 3 <u>1.9</u>	# 4 <u>2.1</u>	# 5 <u>2.0</u>	# 6 <u>2.4</u>
# 7 <u>2.3</u>	# 8 <u>2.2</u>	# 9 <u>3.1</u>	# 10		
Anode Depth					
# 11	# 12	# 13	# 14	# 15	# 16
# 17	# 18	# 19	# 20		
Anode Output (Amps)					
# 11	# 12	# 13	# 14	# 15	# 16
# 17	# 18	# 19	# 20		
Total Circuit Resistance					
Volts <u>11.2</u>	Amps <u>10.0</u>	Ohms <u>1.12</u>	No. 8 C.P. Cable Used <u>5509</u>	No. 2 C.P. Cable Used <u>0</u>	
47940 on Anodes 7155 surface					

Remarks: 3/4" Hosc to No 2 Anode, Perforated All


Did Not use Barafos-

Good All Rectifier - 40-16 Ser 69C1572

All Construction Completed

Derrel
(Signature)

GROUND BED LAYOUT SKETCH

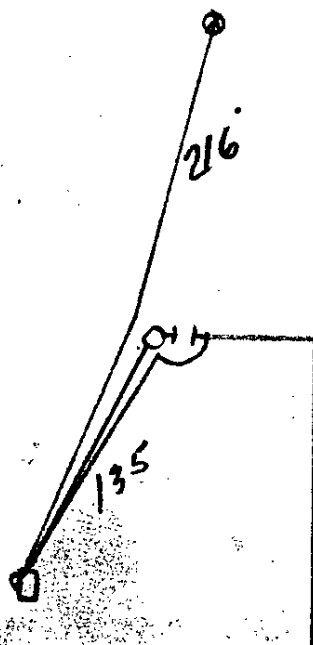

8422W

WELL NO. 60 CONTRACTOR Almas Drilling Co. RIG NO. 17 REPORT NO. 1519 DATE 8-10-54 TIME 8:10 AM

Driller Bill Williams T.O. 8:10 AM M.O. 10:00 AM Drilling Crew Bill Williams, Jack Smith, Fred Brown, Ed Davis, Sam Miller, Al Jones

FORMATION Shale NO. DC 1 SIZE 8 1/2" LENO 10' NO. DC 1 SIZE 8 1/2" LENO 10'

Drill Bit 6 1/2" SERIAL NO. 66107-201 STANDS 1 SINGLES 1 DOWN ON KELLY 1 TOTAL DEPTH 10'

Drill Bit 6 1/2" SERIAL NO. 66107-201 STANDS 1 SINGLES 1 DOWN ON KELLY 1 TOTAL DEPTH 10'

Drill Bit 6 1/2" SERIAL NO. 66107-201 STANDS 1 SINGLES 1 DOWN ON KELLY 1 TOTAL DEPTH 10'

Drill Bit 6 1/2" SERIAL NO. 66107-201 STANDS 1 SINGLES 1 DOWN ON KELLY 1 TOTAL DEPTH 10'

Drill Bit 6 1/2" SERIAL NO. 66107-201 STANDS 1 SINGLES 1 DOWN ON KELLY 1 TOTAL DEPTH 10'