

4870

30-245-11026

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit SW Sec 4 Twp 31 Rng 10

Name of Well/Wells or Pipeline Serviced SCOTT #6

cps 447w

Elevation 5974' Completion Date 12/14/66 Total Depth 220' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. 60'

RECEIVED

MAY 31 1991

Depths gas encountered: N/A

OIL CON. DIV
DIST. 2

Type & amount of coke breeze used: 3000 lbs.

Depths anodes placed: 256', 250', 244', 238', 232', 226', 220', 214', 208', 202'

Depths vent pipes placed: 256' OF 3/4" HOSE

Vent pipe perforations: 70'

Remarks: qb #2

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

Date 12-14-66

Well Name <u>Scott No. 6</u>				CPS No. <u>4474</u>	
Location <u>SW 1-21-10</u>				Work Order No. <u>184-52453-50-20</u>	
Anode Hole Depth <u>220</u>	Total Drilling Rig Time <u>23 Hrs</u>	Type & Size Bit Used <u>5 1/2" x 7 1/2" = 250</u> <u>6 1/2" - 60037 = 15' 2' 38" = 15'</u>		No. Sacks Mud Used <u>2</u>	
No. Sacks Lost Circulation Mat'l Used <u>0</u>	Anode Depth				
	# 1 <u>256</u>	# 2 <u>250</u>	# 3 <u>244</u>	# 4 <u>238</u>	# 5 <u>232</u> # 6 <u>226</u>
Total Lbs. Coke Used <u>3000</u>	Anode Output (Volts)				
	# 1 <u>4.5</u>	# 2 <u>5.9</u>	# 3 <u>5.7</u>	# 4 <u>5.3</u>	# 5 <u>5.0</u> # 6 <u>4.4</u>
Total Circuit Resistance	No. Ft. Surface Cable Conduit				
Volts <u>12.2</u> Amps <u>13.8</u> Ohms <u>0.89</u>	<u>2590 Anodes - 110' Surface 2700'</u>				
Drilling Log (Attach Hereto). ☐	7 <u>220</u>	8 <u>214</u>	9 <u>208</u>	10 <u>202</u>	
Remarks:	7 <u>3.7</u>	8 <u>3.6</u>	9 <u>4.4</u>	10 <u>3.8</u>	



3/4" Hose to No. 1 Anode - Perforated 70'
15 lbs Barofos Added while Coking

Driller states water stands at 60'
Did not Drill with Air. Due to Boulders

All Construction Completed

Forrester
(Signature)

GROUND BED LAYOUT SKETCH

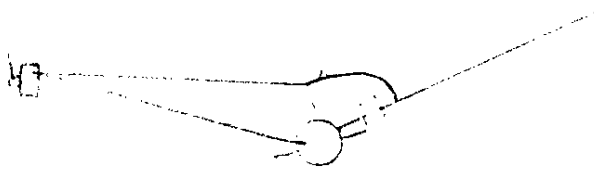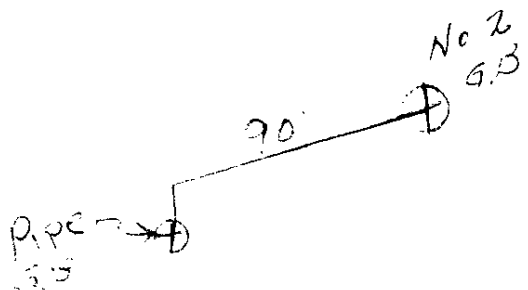

16

EVENING

Ande

Company Supervisor

David