

#33 → 30-039-07869

#452 → 30-039-24274

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO

(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL INC. Location: Unit N Sec. 8 Twp 30 Rng 6

Name of Well/Wells or Pipeline Serviced SAN JUAN 30-6 UNIT #33, #452

cps 2054w

Elevation 6275' Completion Date 11/3/88 Total Depth 340' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used

N/a

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. 100'

Depths gas encountered: N/A

Type & amount of coke breeze used: N/A

Depths anodes placed: 310', 300', 290', 280', 250', 240', 230', 200', 190', 170'

Depths vent pipes placed: 340'

Vent pipe perforations: 240'

Remarks: gb #3

RECEIVED

MAY 31 1991

OIL CON. DIV
DIST. 3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

Drilling Log (Attach Hereto) ☐

Comp 11-95873
Completion Date 11-3-88

CPS #	Well Name, Line or Plant:	Work Order #	Static:	Ins. Union Check
2054W	San Juan 30-6 #452 #33	3284A	600N = 679V	☐ Good ☒ Bad 1/2" x 3" union
Location:	Anode Size:	Anode Type:	Size Bit:	
NB-30-6	2" x 60"	Durum	5 3/4"	
Depth Drilled	Depth Logged	Drilling Rig Time	Total Lbs. Cable Used	Loss Circulation Mat'l Used
340'	340'			
Anode Depth				
#1 310	#2 300	#3 290	#4 280	#5 250
#6 240	#7 230	#8 200	#9 190	#10 170
Anode Output (Amps)				
#1 2.7	#2 3.3	#3 2.9	#4 2.3	#5 3.1
#6 4.1	#7 3.8	#8 2.7	#9 3.4	#10 3.4
Anode Depth				
#11	#12	#13	#14	#15
#16	#17	#18	#19	#20
Anode Output (Amps)				
#11	#12	#13	#14	#15
#16	#17	#18	#19	#20
Total Circuit Resistance			No. 8 C.P. Cable Used	No. 2 C.P. Cable Used
Volts 12.2	Amps 17.0	Ohms .71		

Remarks: Static water at 10'; sample taken. Installed 340' of 1" PVC vent pipe, bottom 240' perforated


QAB 4074.00

Rectifier Size:	V	A
Add'l Depth		
Depth Credit:	160' @ 3.50	560.00 ✓
Extra Cable:	640' @ .24	153.60 ✓
Ditch & 1 Cable:	740' @ .70	518.00 ✓
Ditch & 2 Cable:		
25' Meter Pole:		
20' Meter Pole:		
10' Stub Pole:		
Junction Box:	10 @ 22.50	225.00

4410.60 ✓
tax 220.53 ✓
4631.13 ✓ OIC 93

All Construction Completed

Calvin Rosman
(Signature)

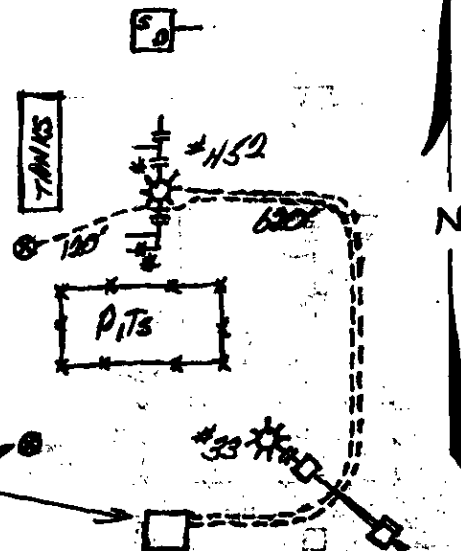

6275