

30-045-10770

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO

(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL INC. Location: Unit H Sec. 16 Twp 31 Rng 11

Name of Well/Wells or Pipeline Serviced BROOKHAVEN COM G #9

cps 2029w

Elevation 6125' Completion Date 11/1/88 Total Depth 320' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used

N/A

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. 40' & 75' NO SAMPLE

Depths gas encountered: N/A

Type & amount of coke breeze used: N/A

Depths anodes placed: 255', 245', 230', 210', 195', 175', 165', 155', 140', 115'

Depths vent pipes placed: 314'

Vent pipe perforations: 280'

Remarks: gb #1

RECEIVED
MAY 31 1989
OIL CON.
DIST. 3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

Comp 11-7-88 JZ

Drilling Log (Attach Hereto) ☐

Completion Date 11/1/88

CPS #	Well Name, Line or Plant:	Work Order #	State:	Ins. Union Check
2029 W	BROOKHAVEN COM 6-9	50720A	.64V 600' S.	☒ Good ☐ Bad
Location:	Anode Size:	Anode Type:	Size Bit:	
H-16-31-11	2" x 60"	Durion	6 3/4"	
Depth Drilled	Depth Logged	Drilling Rig Time	Total Lbs. Coke Used	Lost Circulation Mat'l Used
320'	314'			
Anode Depth				
# 1 255'	# 2 245'	# 3 230'	# 4 210'	# 5 195'
# 6 175'	# 7 165'	# 8 155'	# 9 140'	# 10 115'
Anode Output (Amps)				
# 1 6.4	# 2 6.6	# 3 5.5	# 4 5.1	# 5 4.9
# 6 6.0	# 7 6.2	# 8 5.5	# 9 5.7	# 10 5.0
Anode Depth				
# 11	# 12	# 13	# 14	# 15
# 16	# 17	# 18	# 19	# 20
Anode Output (Amps)				
# 11	# 12	# 13	# 14	# 15
# 16	# 17	# 18	# 19	# 20
Total Circuit Resistance			No. 8 C.P. Cable Used	No. 2 C.P. Cable Used
Volts 11.9	Amps 28.6	Ohms .42		

Remarks: WATER AT 40' & 75' COULD NOT GET WATER SAMPLE. INSTALLED 314' of 1" PVC VENT pipe, Perforated 280'.

LAYED 1/2" Fuel Line in wire ditch.

G.B. 4170.00

Reel Size: V. A 7695.00

Add'l Depth: 0
Depth Credit: -186.25 -651.00
Extra Cable: 195' .25 48.75
Ditch & 1 Cable: 190' .75 142.50

Bitch & 2 Cable:
25' Meter Pole: 0
20' Meter Pole: 0
10' Stub Pole: 0
Junction Box: 1 249.00


11654.25

TAX 582.71

TOTAL \$ 12236.96 OK JZ

All Construction Completed

(Signature)

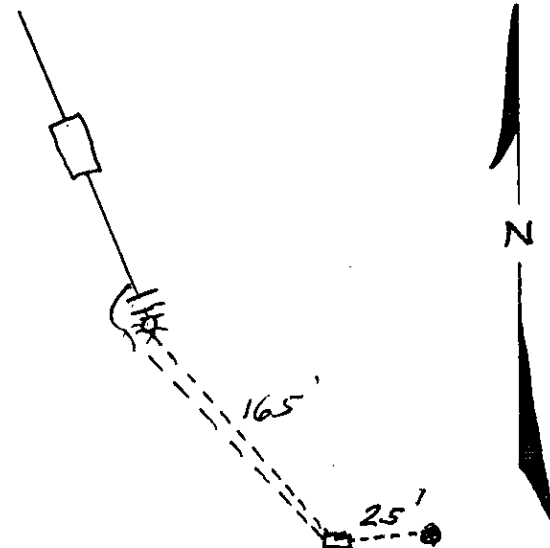

66105

D. CIASS DRILLING CO.

Drill No. 3

DRILLER'S WELL LOG

S. P. No. Brookhaven^{Comp} 9 Date 11-1-88
Client Meridian Oil Co. Prospect _____
County SAN JUAN State New Mex.

If hole is a redrill or if moved from original staked position show distance
and direction moved: _____

FROM	TO	FORMATION — COLOR — HARDNESS
0	15	SANDstone
15	20	SAND
20	35	SANDstone
35	40	SAND
40	60	SANDstone
60	80	SAND
80	100	SANDstone
100	120	SHALE
120	185	SANDstone
185	210	SHALE
210	235	SANDY SHALE
235	280	SHALE
280-320		SANDY SHALE
Mud	Bron	Lime

Rock Bit Number _____ Make _____

Remarks: Water @ 7' 40' & 75'

Driller Rennie Brown