

1 = 30-045-10171
2 = 30-045-21170

4932

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit NE Sec. 32 Twp 31 Rng 10

Name of Well/Wells or Pipeline Serviced SUNRAY K COM #1, A #2

cps 335w

Elevation 6126' Completion Date 11/15/67 Total Depth 270' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. 80'

Depths gas encountered: N/A

Type & amount of coke breeze used: 2640 lbs.

Depths anodes placed: 256', 250', 244', 238', 232', 226', 220', 214'

Depths vent pipes placed: 250' OF 3/4" HOSE

Vent pipe perforations: 250'

Remarks: qb #2 HOLE MAKING SMALL AMOUNT OF GAS.

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

RECEIVED
MAY 31 1991
OIL CON
DIST

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

Did Not Drill With Air

Date 11-15-67

No 2 G.B.

Well Name <u>SUNRAY STATE No 1</u>			CPS No. <u>335W</u>		
Location <u>NE 32-31-10</u>			Work Order No. <u>182-90058-50-20</u>		
Anode Hole Depth <u>270</u>	Total Drilling Rig Time <u>11 1/2 Hrs</u>	Type & Size Bit Used <u>6 1/4 39321-220, 6176-50</u>		No. Sacks Mud Used <u>0</u>	
No. Sacks Lost Circulation Mat'l Used <u>0</u>	Anode Depth				
	# 1 <u>256</u>	# 2 <u>250</u>	# 3 <u>244</u>	# 4 <u>238</u>	# 5 <u>232</u>
Total Lbs. Coke Used <u>21640</u>	Anode Output (Volts)				
	# 1 <u>4.9</u>	# 2 <u>5.7</u>	# 3 <u>5.2</u>	# 4 <u>5.1</u>	# 5 <u>5.4</u>
Total Circuit Resistance	No. Ft. Surface Cable Conduit				
Volts <u>11.6</u>	Amps <u>12.7</u>	Ohms <u>0.91</u>	<u>20400W Anodes 553' surface = 2593'</u>		
Drilling Log (Attach Hereto). ☐		7 <u>220</u>		8 <u>214</u>	
Remarks:		7 <u>5.1</u>		8 <u>4.5</u>	


3/4" Hose to No. 1 Anode - Perforated All
15 lbs Borafos Added to Circulation

Hole Making Small Amount of Gas.

All Construction Completed

Arrels
(Signature)

GROUND BED LAYOUT SKETCH

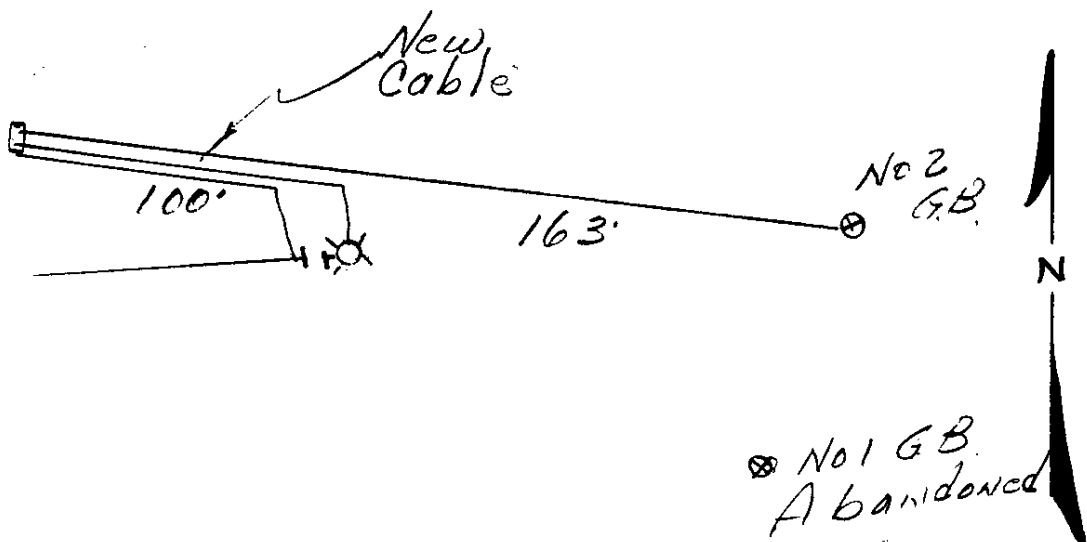

DAILY DRILLING REPORT

[illegible]