Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*(Instructions on reverse)

DAILLING OPERATIONS AUTHORIZED ARE SUBJECT TO COMPLIANCE WITH ATTACHED "GENERAL REQUIREMENTS".

This action is subject to technical and procedural review pursuant to 43 CFR 3165.3 and appeal pursuant to 43 CFR 3165.4

District I
PO Box 1980, Hobbs NM 88241-1980
District II
PO Drawer KK, Artesia, NM 87211-0719
District III
1000 Rio Brazos Rd., Aztec, NM 87410

PO Box 2088, Santa Fe, NM 87504-2088

District IV

State of New Mexico Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION PO Box 2088 Santa Fe, NM 87504-2088

Form C-102
Revised February 21, 1994
Instructions on back
Submit to Appropriate District Office
State Lease - 4 Copies
Fee Lease - 3 Copies


☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number	- / /	¹ Pool Code	¹ Pool Name	
30-045- 31	846	71629	Basin Fruitland Coal	
Property Code			Well Number	
32858	. Sai	# 3		
7 OGRID No.		Operator Name		
20572	SG INTERESTS I LTD			5671

¹⁰ Surface Location

UL or Lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
C	17	29 N	9 W		1025	NORTH	2145	WEST	SAN JUAN
		<u> </u>	" Bott	om Hole	Location If	Different Fron	n Surface		
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
								ĺ	
Dedicated Acres	13 Join	t or Infill 14	Consolidatio	n Code	Order No.				
N/2 - 320	اد	Y							

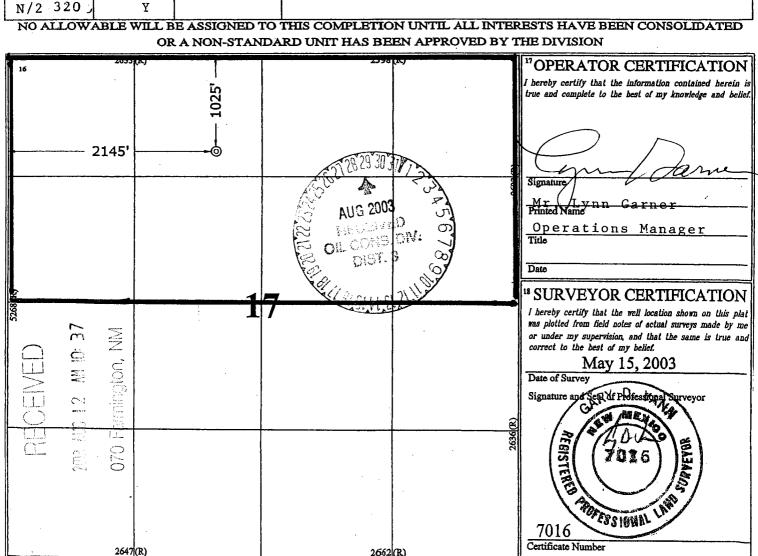

SG Interests I, Ltd. (Agent: Sagle & Schwab Energy Resources) PO Box 2677 Durango, CO 81302 (970) 259-2701

Santa Rosa 29-9-17 #3 NENW Sec 17-T29N-R9W 1025' FNL & 2145' FWL San Juan County, New Mexico

EIGHT POINT DRILLING PROGRAM

1. Estimated Formation Tops:

Ojo Alamo	950'
Kirkland	1075'
Fruitland Coal	1800'
Pictured Cliffs	2110
Total Depth	2250'

2. Estimated Depth of Anticipated Minerals:

Fruitland (Gas)

3. Minimum Specifications for Pressure Control Equipment:

BOP equipment and accessories will meet or exceed BLM requirements outlined in 43 CFR Part 3160.

1950'

A 3000 psig double ram hydraulic BOP will be used (see attached diagram). Since maximum anticipated formation pressure is 1200 psig, accessories to the BOP will meet BLM requirements for a 2000 psig system (exhibit 1). The accumulator system capacity will be sufficient to close all BOPE with a 50% safety factor. Fill line, kill line and line to choke manifold will be 2". BOP's will be function tested every 24 hours and will be recorded on IADC log.

Surface casing will be tested to 1500 psig for 30 minutes.

Eight Point Drilling Program - Santa Rosa 29-9-17 #3 Page 2

Accessories to BOPE will include upper and lower Kelly cocks with handles, stabbing valve to fit drill pipe on floor at all times, string float at bit, 3000 psig choke manifold with 2" adjustable and 2" positive chokes, and pressure gauge.

4. Casing and Cementing Program:

<u> Hole Size</u>	<u>Interval</u>	<u>Csg Size</u>	<u>Wt, Grd, Jt</u>
12-1/4"	0-300'	8-5/8"	24#, J-55, STC
7-7/8"	300-2250'	5-1/2"	17#. J-55, LTC

Surface Casing will be cemented with 210 sx (248 cu ft) class B w/3% CaCl and 1/4#/sx of celloflake (Yield = 1.18 cuft/sx, Weight = 15.6 #/gal). Cement volumes include excess to circulate cement to surface. A guide shoe, insert float and three (3) centralizers will be used. WOC time is 8 hours. The casing will be pressure tested to 1500 psig.

Production Casing: Lead cement will be 170 sx 65/35 poz with 6% gel, 2% CaCl and 1/4#/sx celloflake (Yield = 1.92 cuft/sx, Weight = 12.6#/gal). Tail cement will be 165 sx Class B containing 2% CaCl and 1/4#/sx celloflake (Yield = 1.18 cuft/sx, Weight = 15.6 #/gal). Total cement = 522 cuft. Cement volume includes excess to circulate cement to surface. In the event cement is not circulated a temperature survey will be run to determine the actual cement top, as required. Cementing equipment will include a guide shoe, float collar and 10 centralizers. Class G or H cement may be used depending on availability of Class B.

5. Mud Program:

A native water based mud system (FW) will be used initially followed by a low-solids, non-dispersed gel system (LSND) to condition the hole for logs. Adequate amounts of lost circulation and weighting material will be on location if needed as well as sorbitive agents to handle potential spills of fuel or lubricants.

Depth	Type	Wt (ppg)	<u>Vis (sec)</u>	Wtr loss
0-300'	FW	± 8.5	30-33	NC
300'-TD	LSND	± 8.7-9.5	30-50	8-10 cc