

4082

30-045-27165

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO

(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL INC. Location: Unit G Sec. 18 Twp 32 Rng 6Name of Well/Wells or Pipeline Serviced ALLISON UNIT #111


cps 2137w

Elevation 6507' Completion Date 5/18/89 Total Depth 500' Land Type* N/ACasing, Sizes, Types & Depths N/AIf Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used

N/A

Depths & thickness of water zones with description of water when possible:

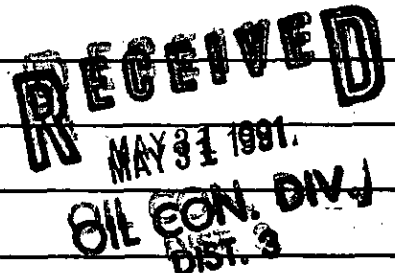Fresh, Clear, Salty, Sulphur, Etc. 100'Depths gas encountered: N/AType & amount of coke breeze used: N/ADepths anodes placed: 475', 420', 410', 390', 380', 370', 360', 350', 340', 330'Depths vent pipes placed: 505'Vent pipe perforations: 420'Remarks: gb #1

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

**WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG**

Comp 92

Drilling Log (Attach Hereto) ☒Completion Date 5-18-89

CPS #	Well Name, Line or Plant:	Work Order #	Seismic:	Ins. Union Check
2137-W	ALLISON #111	3526A	600' NW = .839	☒ Good ☐ Bad
Location: <u>48-32-6</u>	Anode Size: <u>2" x 60"</u>	Anode Type: <u>Duriron</u>	Size Bit: <u>6 3/4"</u>	
Depth Drilled <u>500'</u>	Depth Logged <u>500'</u>	Drilling Rig Time	Total Lbs. Coke Used	Lost Circulation Mat'l Used
No. Sacks Mud Used				
Anode Depth	# 1	# 2	# 3	# 4
	475'	420'	410'	390'
Anode Output (Amps)	# 1	# 2	# 3	# 4
	2.8	3.2	3.2	3.5
Anode Depth	# 5	# 6	# 7	# 8
	380'	370'	360'	350'
Anode Output (Amps)	# 5	# 6	# 7	# 8
	3.5	3.1	3.0	3.2
Anode Depth	# 9	# 10	# 11	# 12
	340'	330'	320'	310'
Anode Output (Amps)	# 9	# 10	# 11	# 12
	3.4	3.3	3.2	3.1
Total Circuit Resistance	No. 8 C.P. Cable Used			
Volts <u>11.98</u>	No. 2 C.P. Cable Used			
Amps <u>15.1</u>	Ohms			

Remarks: DRILLED 500', LOGGED 500'. DRILLER SAID DAMP
AT 100'. INSTALLED 505' OF 1" PVC VENT PIPE
PERFORATED BOTTOM 420'


* Build Power TO LOCATION EST. 1200'

Rectifier Size: 40 v 16 A
 Addn'l Depth _____
 Depth Credit: _____
 Extra Cable: 330' .20
 Ditch & 1 Cable: 340' .70
 25' Meter Pole: _____
 20' Meter Pole: 1
 10' Stub Pole: _____
 Junction Box: 1

All Construction Completed

M. Williams
 (Signature)

GROUND BED LAYOUT SKETCH

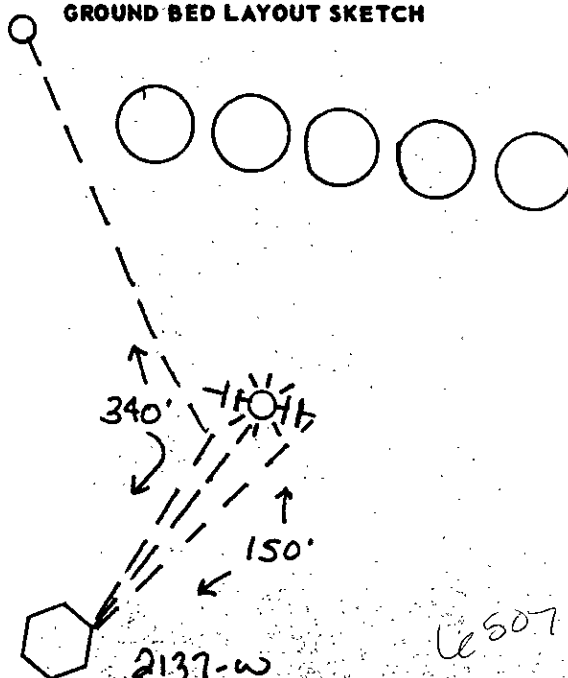

Rest of
LOCATION
NOT SET
Yet

3870.00
 599.00
 66.00 ✓
 238.00 ✓
 312.50 ✓
 237.00
 5322.50 ✓
 266.13 ✓
 5588.63 OK 92

6607