

30-045-10258

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator TENNECO Location: Unit SW Sec. 29 Twp 31 Rng 9

Name of Well/Wells or Pipeline Serviced RIDDLE C #3

cps 340w

Elevation 6311' Completion Date 7/10/74 Total Depth 440' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. 120'

RECEIVED

MAY 31 1991

Depths gas encountered: N/A

OIL CON. DIST. 3

Type & amount of coke breeze used: N/A

Depths anodes placed: 400', 345', 285', 265', 255', 245', 235', 225', 215', 205'

Depths vent pipes placed: N/A

Vent pipe perforations: 350'

Remarks: gb #2 not a MERIDIAN well.

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

Drilling Log (Attach Hereto) ☐


Completion Date **7-10-74**

Well Name Riddle C #3		Location SW 29-31-9				CPS No. 340W				
Type & Size Bit Used 6 3/4						Work Order No. 52319				
Anode Hole Depth 440	Total Drilling Rig Time		Total Lbs. Coke Used		Lost Circulation Mat'l Used		No. Sacks Mud Used			
Anode Depth	# 1 400	# 2 345	# 3 285	# 4 265	# 5 255	# 6 245	# 7 235	# 8 225	# 9 215	# 10 205
Anode Output (Amps)	# 1 2.1	# 2 2.3	# 3 2.8	# 4 3.4	# 5 4.0	# 6 4.6	# 7 4.3	# 8 3.7	# 9 4.0	# 10 3.2
Anode Depth	# 11	# 12	# 13	# 14	# 15	# 16	# 17	# 18	# 19	# 20
Anode Output (Amps)	# 11	# 12	# 13	# 14	# 15	# 16	# 17	# 18	# 19	# 20
Total Circuit Resistance	Volts 11.3		Amps 13.8		Ohms 0.82		No. 8 C.P. Cable Used 65		No. 2 C.P. Cable Used	

Remarks: **Driller said wet at 50 start injection, Watch at 120'**
~~But~~ Vent Perforated 350'
Pump Coke to Surface

All Construction Completed

Sorels
(Signature)

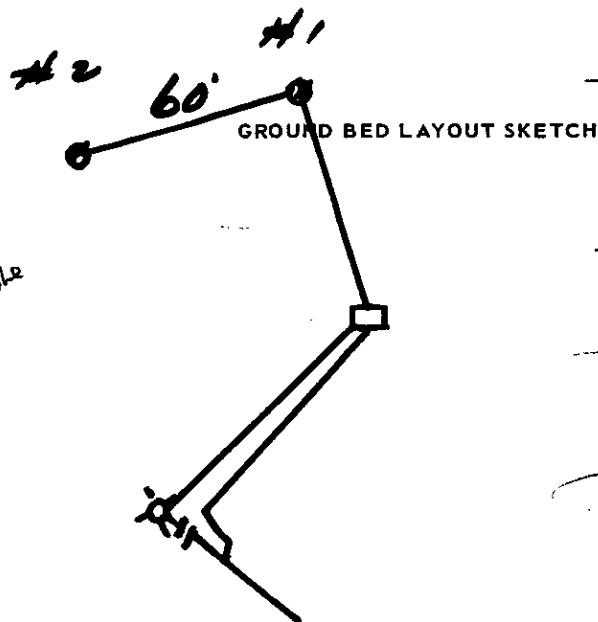

\$3409.00
26.00 Cable

\$3,435.00
-150.00 Depth Credit

\$3,285.00
131.40 TAX

\$3,416.40 TOTAL

STORM WATER WELL DRILLING INC.

GENERAL OFFICE
14991 W. 44TH AVENUE
BAILEY OFFICE
CALL 1-833-4321

Location
City SARASOTA State FL County MANATEE

Injection At 50'
Water zone at 120

Helper _____

11.5W - X=8

340W - 7-10-74

X=6.5

100	2	280	6	Driller Said Met at					
	3		8	50' Start Injection					
10	2	90	7	Said More water at 120					
	3		3	Drill T.O. w. P.A. air					
20		300	2						
			2						
30		10	2	Want Perf 300					
			5	Pump to Surface					
40		20	4						
			5						
50	4	30	4						
	5		4						
60	9	40	8	60 8 9 21					
	10		9	1 400 8 9 21					
70	7	50	6	2 345 7 11 23					
	7		6	3 285 8 12 24					
80	7	60	5	4 265 9 15 24					
	7		6	5 255 13 20 40					
90	7	70	6	6 245 17 24 46					
	7		6	7 235 18 23 43					
100	7	80	6	8 225 16 21 37					
	17		4	9 215 19 21 40					
10	16	90	6	10 205 17 17 32					
	19		6	82					
20	18	400	8	11.31 13.8 = 0.82					
	16		6	11.04					
30	16	10	5	260					
	18		5						
40	18	20	6						
	17		5						
50	16	30	3						
	13		3						
60	11	1040							
	9								
70	7								
	7								

60' BZ 1B