

submitted in lieu of Form 3160-5

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
Sundry Notices and Reports on Wells

RECEIVED

2003 AUG 29 AM 11: 59

070 Farmington, NM

1. Type of Well
Gas

2. Name of Operator
Geo Met Operating Co. Inc.

3. Address & Phone No. of Operator
5336 Stadium Trace Parkway, Suite 206, Birmingham, AL 35244

Phone: 205-425-3856

Location of Well, Footage, Sec., T, R, M

1844' FSL and 1606' FWL, Sec. 28, T-25-N, R-13-W,

5. Lease Number
NM-087305

6. If Indian, All. or
Tribe Name

7. Unit Agreement Name

8. Well Name & Number
Engleberry #1

30-045-30856

Field and Pool
Basin Fruitland

County & State
San Juan County, NM

12. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OTHER DATA

Type of Submission

☐ Notice of Intent

☒ Subsequent Report

☐ Final Abandonment

Type of Action

☒ Abandonment

☐ Recompletion

☐ Plugging Back

☐ Casing Repair

☐ Altering Casing

☐ Other -

☐ Change of Plans

☐ New Construction

☐ Non-Routine Fracturing

☐ Water Shut off

☐ Conversion to Injection

13. Describe Proposed or Completed Operations

GeoMet Operating plugged and abandoned this well on July 18, 2003 per the following:

7/18/03: MOL and RU. RU Black Warrior Wireline and run GR/CBL/CCL from PBTD at 1267' to surface. Good cement bond throughout well with TOC at 184'. NU BOP on 5-1/2" casing head. Tally and TIH with 2-3/8" workstring to 1000'. Plug #1 with 17 sxs cement inside the casing from 1000' to 839'. PUH to 675'. Plug #2 with 17 sxs cement inside casing from 674' to 513'. POH and LD tubing. Perforate 2 squeeze holes at 170'. Establish circulation out bradenhead and circulate annulus clean. Plug #3 with 68 sxs cement pumped down the casing from 170' to surface, circulate good cement out bradenhead annulus. Shut in well and WOC. ND BOP. Dig out wellhead and cut off. Found cement at surface in casing and 8-5/8" annulus. Mix 20 sxs cement and install P&A marker. RD and MOL.

14. I hereby certify that the foregoing is true and correct.

Signed

John Hollingshead

Title

Reservoir Engineer

Date

8/19/03

(This space for Federal or State Office use)

APPROVED BY

Title

CONDITION OF APPROVAL, if any:

ACCREDITED HEAD RECORD

SEP 06 2003

NMOCD

MINING FIELD OFFICE

GeoMet *Operating Company, Inc.*

COALBED METHANE EXPLORATION AND DEVELOPMENT

5336 Stadium Trace Parkway • Suite 206 • Birmingham, Alabama 35244 • Phone: (205) 425-3855 • Fax (205) 425-4711

RECEIVED
2003 AUG 29 AM 11: 59

August 26, 2003

070 Farmington, NM


Mr. Steven Mason
Bureau of Land Mangement
1235 La Plata Highway
Farmington, NM 87401

Mr. Steven Mason:


GeoMet Operating Co. Inc. respectfully submits the following plugging information for your review. A-Plus Well Service, Inc. of Farmington, NM plugged the Engleberry No. 1 well for GeoMet Operating Co. on July 18, 2003. The attached sundry notice details our plugging activities. A CBL was run prior to P&A operations and a copy of the cement bond log is included. The cement top is seen at 170 ft. (KB).


Please feel free to call me at 205-425-3855 ext. 116 if you have any questions about this information.

Best regards,



John Hollingshead, P.E.
Reservoir Engineer





GAMMA RAY / CCL
ACOUSTIC CEMENT
BOND LOG

COMPANY GEO MET OPERATING CORP		WELL ENGLEBERRY #1	
FIELD FRUITLAND COAL		CITY SAN JUAN STATE NM	
LOCATION: 1844' FSL & 1606' FWL		OTHER SERVICES:	
SEC. 28 TWP. 25N RGE. 13M			
PERM. DATUM GROUND LEVEL		ELEV. 6222'	
LOG MEASURED FROM K.B. 5 FT. ABOVE PERMANENT DATUM		ELEV. : K.B. 6227'	
DRILLING MEASURED FROM KELLY BUSHING		D.F. 6226'	
		G.L. 6222'	
DATE	07/18/03		
RUN NO.	ONE		
DEPTH DRILLER	1267'		
DEPTH LOGGER	1267'		
BTM. LOG INTERVAL	1261'		
TOP LOG INTERVAL	SURFACE		
OPEN HOLE SIZE	5 1/2"		
TYPE FLUID	WATER		
DENS.	N/A		
VISC.	N/A		
MAX. REC. TEMP. °F	N/A		
EST. CEMENT TOP	SEE LOG		
TIME WELL READY	SEE LOG		
TIME LOGGER ON BTM.	SEE LOG		
EQUIP. NO.	T-1044		
LOCATION	FARMINGTON		
RECORDED BY	P. PAYTON		
WITNESSED BY	CHRIS CLARK		
BOREHOLE RECORD			
RUN NO.	BIT	FROM	TO
TUBING RECORD			
	SIZE	WGT.	FROM
			TO
CASING RECORD			
	SIZE	WT/FT	GRADE
			TYPE JOINT
			TOP
			BOTTOM
SURFACE STRING	8-5/8"	24#	K-55
PROD. STRING	5-1/2"	15.5	K-55
PROD. STRING			SURF.
LINER			1267'

ALL INTERPRETATIONS ARE OPINIONS BASED ON INFERENCES FROM ELECTRICAL OR OTHER MEASUREMENTS AND WE CANNOT AND DO NOT GUARANTEE THE ACCURACY OR CORRECTNESS OF ANY INTERPRETATION, AND WE SHALL NOT, EXCEPT IN THE CASE OF GROSS OR WILLFULL NEGLIGENCE ON OUR PART, BE LIABLE OR RESPONSIBLE FOR ANY LOSS, COSTS, DAMAGES, OR EXPENSES INCURRED OR SUSTAINED BY ANYONE RESULTING FROM ANY INTERPRETATION MADE BY ANY OF OUR OFFICERS, AGENTS OR EMPLOYEES. THESE INTERPRETATIONS ARE ALSO SUBJECT TO OUR GENERAL TERMS AND CONDITIONS SET OUT IN OUR CURRENT PRICE SCHEDULE.

VERSION: 2.61

GEO

FINISH DEPTH: -8.0 FEET DIRECTION: UP DATE: 07/18/03 TIME: 06:48:12 MODE: RECOMPUTE

BONDED PIPE

AMP TRAVEL TIME

AMPLITUDE X5

200


USEC

2000

MV

20

FINISH DEPTH: -8.0 FEET DIRECTION: UP DATE: 07/18/03 TIME: 06:48:12 MODE: RECOMPUTE

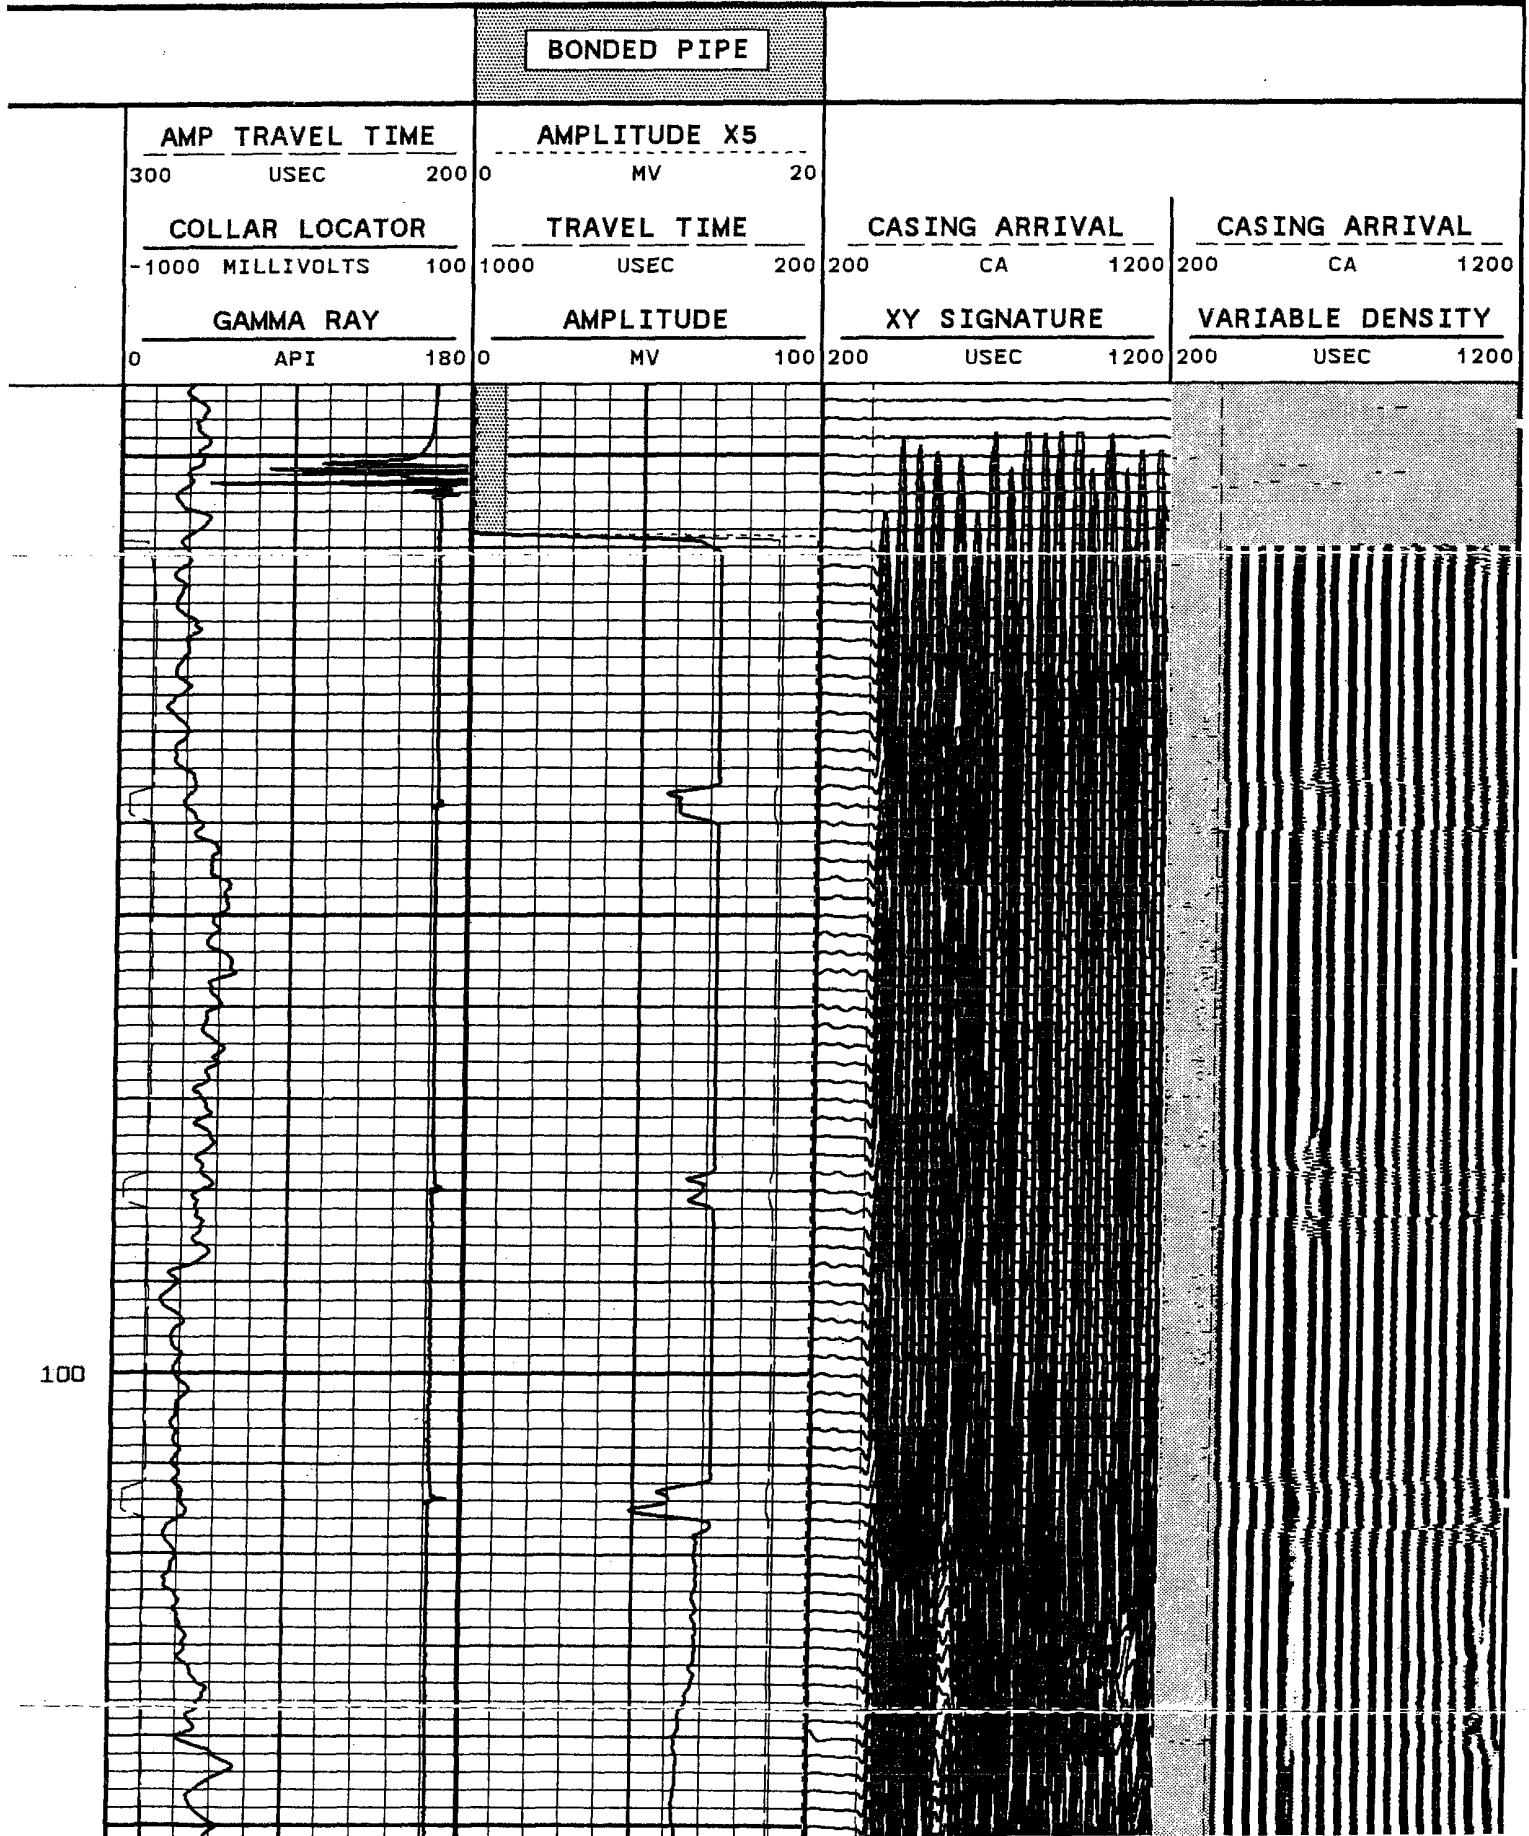

100

100

200

300

