

16- 30-039- 07764
410- 30-039- 24602
1124- 30-039- 23501

4471

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit NE Sec. 26 Twp 30 Rng 6

Name of Well/Wells or Pipeline Serviced SAN JUAN 30-6 UNIT #16, #4120, #112Y

cps 192w

Elevation 6733' Completion Date 8/28/84 Total Depth 450' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. 280', 350' (foam)

RECEIVED

MAY 31 1991

Depths gas encountered: N/A

**OIL CON. DIV
DIST. 3**

Type & amount of coke breeze used: N/A

Depths anodes placed: 410', 400', 390', 380', 370', 360', 335', 320', 310', 300'

Depths vent pipes placed: N/A

Vent pipe perforations: 300'

Remarks: gb #2 #1, #2. ANODES DID NOT RESPOND AS MUCH AS ANTICIPATED-PROBABLE

PARTIAL BRIDGE

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

Drilling Log (Attach Hereto) ☐

Completion Date **8-28-74**

Well Name SJ 30-6 #16		Location NE 26-30-6		CPS No. 192W	
Type & Size Bit Used 6 3/4				Work Order No. 40071	
Anode Hole Depth 450'	Total Drilling Rig Time	Total Lbs. Coke Used	Lost Circulation Mat'l Used	No. Sacks Mud Used	
Anode Depth					
#1 410	#2 400	#3 390	#4 380	#5 370	#6 360
#7 335	#8 320	#9 310	#10 300		
Anode Output (Amps)					
#1 1.8	#2 2.3	#3 2.4	#4 3.5	#5 3.6	#6 3.4
#7 2.5	#8 2.6	#9 3.2	#10 3.2		
Anode Depth					
#11	#12	#13	#14	#15	#16
Anode Output (Amps)					
#11	#12	#13	#14	#15	#16
Total Circuit Resistance	No. 8 C.P. Cable Used		No. 2 C.P. Cable Used		
Volts 11.7	Amps 14.0	Ohms 0.83	82'		


Remarks: **Driller Said Water at 280' Water (Foam?) at 350' after 1 Hour. Log 350 to 440, Fill With water to 280' & Re-Log.**
No. 1 & 2 Anodes Did Not Respond as much as anticipated
Probably Partial Bridge-
Vent Perforated 300' - Pump to Surface - Two Loads Water

\$3,409.00
32.80 Cable
\$3,441.80
-130.00 Depth Credit
\$3,311.80
132.47 TAX
\$3,444.27 TOTAL

All Construction Completed

Dave
(Signature)

GROUND BED LAYOUT SKETCH

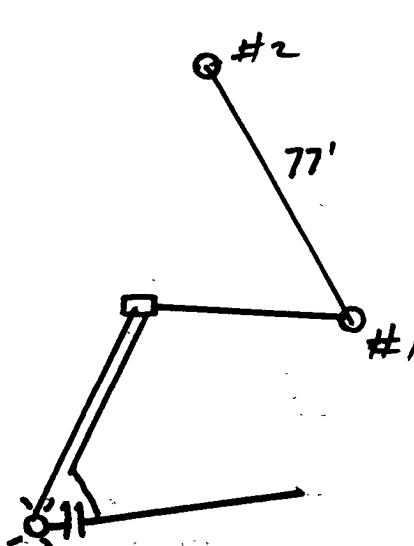

STORM WATER WELL DRILLING INC.

**DIAMOND CORE DRILLING
DIAMOND DRILLING EQUIPMENT
GROUTING
FOUNDATION TESTING
MINING
QUARRYING
SHAFT SINKING
WATER WELL DRILLING**

CONTRACTORS
14991 W. 44TH AVENUE
GOLDEN, COLORADO 80401
PHONE (303) 278-9505

GENERAL OFFICE
14991 W. 46TH AVENUE
BAILEY OFFICE
CALL 1-833-4821

Drill GD 15 W

Date 8-28-74

Owner C.R.S. 192W

Location SARASOTA State FL County _____

[illegible]

Total Hours _____

Equipment Down Time _____

Hours Drilling

Driller Sgt Macruff # 12

Helper _____

Helper _____

C.P.S. Time _____

S.W.W.D.I. Time _____

Total Footage _____

Approval of
C.P.S. Engineer _____

Date:

By

1924) $X = 4.0$

71-1B

[illegible]