

795

2A - 30-045-21767

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit SE Sec. 25 Twp 30 Rng 8

Name of Well/Wells or Pipeline Serviced HOWELL L #2A

cps 1096w

Elevation 6145' Completion Date 6/10/77 Total Depth 657' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. WET AT 85'

Depths gas encountered: N/A


Type & amount of coke breeze used: 86 SACKS

Depths anodes placed: 640', 465', 420', 355', 345', 230', 135', 125', 115', 105'

Depths vent pipes placed: 645'

Vent pipe perforations: 460'

Remarks: qb #1



GIL CON. CO.
DIST. 3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

Handwritten notes and signatures at top right.

Drilling Log (Attach Hereto). ☐

Completion Date 6-10-77


Well Name HOWELL "L" No. 2A		Location SE 25-30-8		CPS No. 1096W	
Type & Size Bit Used 13/4				Work Order No. 57054	
Anode Hole Depth 657	Total Drilling Rig Time	Total Lbs. Coke Used 86	Lost Circulation Mat'l Used	No. Sacks Mud Used	
Anode Depth					
# 1 640	# 2 465	# 3 420	# 4 355	# 5 345	# 6 230
# 7 135	# 8 125	# 9 115	# 10 105		
Anode Output (Amps)					
# 1 2.14	# 2 2.22	# 3 2.15	# 4 2.34	# 5 2.37	# 6 2.48
# 7 2.78	# 8 4.82	# 9 4.32	# 10 4.00		
Anode Depth					
# 11	# 12	# 13	# 14	# 15	# 16
# 17	# 18	# 19	# 20		
Anode Output (Amps)					
# 11	# 12	# 13	# 14	# 15	# 16
# 17	# 18	# 19	# 20		
Total Circuit Resistance				No. 8 C.P. Cable Used	
Volts 11.9		Amps 14.5		Ohms 0.82	
				No. 2 C.P. Cable Used	

Remarks: STATIC 600' NORTH - 0.62 - DRILL TO 460' LOG TO 300'
GO BACK & CLEAN OUT & DRILL TO 520' LOG TO 500' - TOO MUCH
WATER FOR AIR DRILLING - DIG PITS & CHANGE TO MUD
WET AT 85' - VENT TO 645, PERFORATED 460'
SLURRY 86 COKE

All Construction Completed

Signature
(Signature)

GROUND BED LAYOUT SKETCH

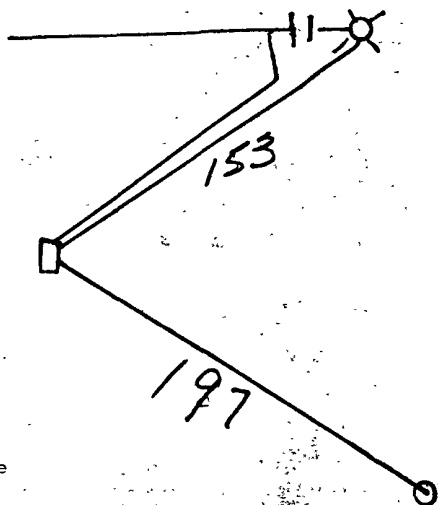

DISTRIBUTION:

- WHITE - Division Corrosion Office
- YELLOW - Area Corrosion Office
- PINK - Originator File

Handwritten number 645

DAILY DRILLING REPORT

[illegible]

SIGNED: Toolpusher

____ Company Supervisor

1096W- HOWELL "L" #2A

wet at 85
Drill 460

[illegible]