

4533

30-039-07562

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit SW Sec. 22 Twp 29 Rng 7

Name of Well/Wells or Pipeline Serviced SAN JUAN 29-7 UNIT #66

cps 96w

Elevation 6785' Completion Date 9/12/66 Total Depth 360' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. N/A

RECEIVED

MAY 31 1991

Depths gas encountered: N/A

OIL CON. DIV
DIST. 3

Type & amount of coke breeze used: 3600 lbs.

Depths anodes placed: 280', 274', 268', 262', 256', 250', 244', 238', 145', 139', 13

Depths vent pipes placed: 280' OF 3/4 " HOSE

Vent pipe perforations: 160'

Remarks: gb #2 COKE BRIDGED-UNABLE TO GET COKE AROUND #1, #2, & #3 ANODE.

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

Date 9-12-66

Well Name <u>S.J. 29-7 #66</u>			CPS No. <u>96W</u>		
Location <u>SW 22-29-7</u>			Work Order No. <u>184-53574-50-20</u>		
Anode Hole Depth <u>360</u>	Total Drilling Rig Time <u>19 1/2 Hrs.</u>	Type & Size Bit Used <u>6 1/4" - 54899 = 360'</u>		No. Sacks Mud Used <u>1</u>	
No. Sacks Lost Circulation Mat'l Used <u>1</u>	Anode Depth				
	# 1 <u>280</u>	# 2 <u>274</u>	# 3 <u>268</u>	# 4 <u>262</u>	# 5 <u>256</u> # 6 <u>250</u>
Total Lbs. Coke Used <u>3600'</u>	Anode Output (Volts)				
	# 1 <u>1.3</u>	# 2 <u>1.5</u>	# 3 <u>1.3</u>	# 4 <u>2.5</u>	# 5 <u>2.6</u> # 6 <u>2.7</u>
Total Circuit Resistance	No. Ft. Surface Cable Conduit				
Volts <u>11.2</u> Amps <u>9.2</u> Ohms <u>1.22Ω</u>	<u>3196 Anodes 120 Surface = 3316</u>				
Drilling Log (Attach Hereto). ☐		7 <u>244</u>	8 <u>238</u>	9 <u>145</u>	10 <u>139</u>
		7 <u>2.8</u>	8 <u>2.7</u>	9 <u>3.5</u>	10 <u>3.5</u>
				11 <u>133</u>	12 <u>127</u>
				11 <u>3.4</u>	12 <u>3.4</u>

Remarks: PE PVC Cable on Anodes

3/4" Hose to No. 1 Anode - Perforated 160'
15 lbs Barafas Circulated through Hole -


Note - Coke Bridged - Unable to get Coke around
1, 2 & 3 Anodes.

All Construction Completed

Farrells

(Signature)

GROUND BED LAYOUT SKETCH

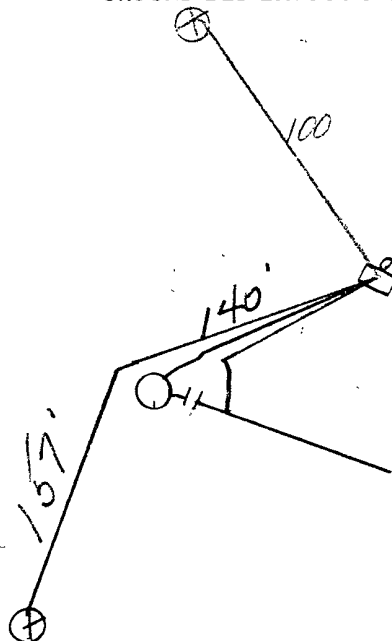

DATE 9-8-61 19

Company SuperM cor