

E

428

30-045-05613

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO

(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit SE Sec. 36 Twp 26 Rng 10

Name of Well/Wells or Pipeline Serviced HUERFANO UNIT #134

cps 1004w

Elevation 6699' Completion Date 9/16/75 Total Depth 320' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. 160'

Depths gas encountered: N/A

Type & amount of coke breeze used: 3200 lbs.

Depths anodes placed: 270', 260', 250', 240', 230', 220', 210', 200', 190', 180'

Depths vent pipes placed: N/A

Vent pipe perforations: 200'

Remarks: gb #1

RECEIVED
MAY 31 1991

OIL CON. D¹
DIST

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

Handwritten signature
Completion Date **9-16-75**

Drilling Log (Attach Hereto) ☐

Well Name Huerfano #134		Location SE 36-26-10		CPS No. 1004 W																																																													
Type & Size Bit Used 6 3/4		2		Work Order No. 54298																																																													
Anode Hole Depth 320'	Total Drilling Rig Time	Total Lbs. Coke Used 3200	Lost Circulation Mat'l Used	No. Sacks Mud Used																																																													
<table border="1"> <tr> <td colspan="2">Anode Depth</td> <td colspan="2"></td> <td colspan="2"></td> </tr> <tr> <td># 1 270</td> <td># 2 260</td> <td># 3 250</td> <td># 4 240</td> <td># 5 230</td> <td># 6 220</td> </tr> <tr> <td colspan="2">Anode Output (Amps)</td> <td colspan="2"></td> <td colspan="2"></td> </tr> <tr> <td># 1 3.0</td> <td># 2 3.2</td> <td># 3 3.8</td> <td># 4 5.2</td> <td># 5 3.8</td> <td># 6 4.3</td> </tr> <tr> <td colspan="2">Anode Depth</td> <td colspan="2"></td> <td colspan="2"></td> </tr> <tr> <td># 11</td> <td># 12</td> <td># 13</td> <td># 14</td> <td># 15</td> <td># 16</td> </tr> <tr> <td colspan="2">Anode Output (Amps)</td> <td colspan="2"></td> <td colspan="2"></td> </tr> <tr> <td># 11</td> <td># 12</td> <td># 13</td> <td># 14</td> <td># 15</td> <td># 16</td> </tr> <tr> <td colspan="2">Total Circuit Resistance</td> <td colspan="2"></td> <td colspan="2"></td> </tr> <tr> <td>Volts 12.5</td> <td>Amps 19.5</td> <td>Ohms 0.64</td> <td colspan="2">No. 8 C.P. Cable Used 2550</td> <td>No. 2 C.P. Cable Used</td> </tr> </table>						Anode Depth						# 1 270	# 2 260	# 3 250	# 4 240	# 5 230	# 6 220	Anode Output (Amps)						# 1 3.0	# 2 3.2	# 3 3.8	# 4 5.2	# 5 3.8	# 6 4.3	Anode Depth						# 11	# 12	# 13	# 14	# 15	# 16	Anode Output (Amps)						# 11	# 12	# 13	# 14	# 15	# 16	Total Circuit Resistance						Volts 12.5	Amps 19.5	Ohms 0.64	No. 8 C.P. Cable Used 2550		No. 2 C.P. Cable Used
Anode Depth																																																																	
# 1 270	# 2 260	# 3 250	# 4 240	# 5 230	# 6 220																																																												
Anode Output (Amps)																																																																	
# 1 3.0	# 2 3.2	# 3 3.8	# 4 5.2	# 5 3.8	# 6 4.3																																																												
Anode Depth																																																																	
# 11	# 12	# 13	# 14	# 15	# 16																																																												
Anode Output (Amps)																																																																	
# 11	# 12	# 13	# 14	# 15	# 16																																																												
Total Circuit Resistance																																																																	
Volts 12.5	Amps 19.5	Ohms 0.64	No. 8 C.P. Cable Used 2550		No. 2 C.P. Cable Used																																																												

Remarks: **Wct at 160' Start wtr injection at 180'**
Drill to 320 —
Vent Perforated 200'
Hole Caving while Coking - Some Response
From all anodes - Might Be Sand instead of Coke


Handwritten signature

Construction Completed

Handwritten signature: Daniels

(Signature)

GROUND BED LAYOUT SKETCH

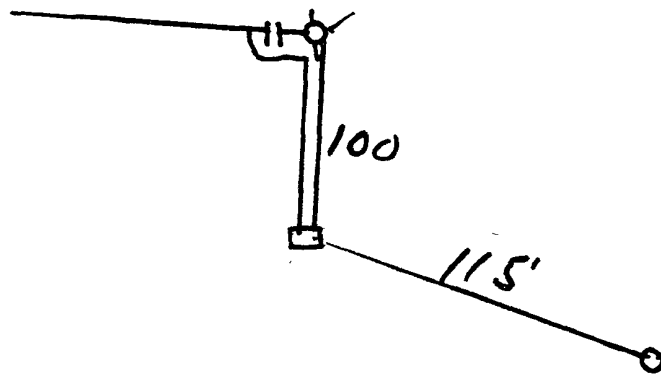

Handwritten note: 6699'

SIGNED: Toolpusher _____ Company Supervisor _____