

74-30-039-07523

4553

518-30-039-24969

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit SW Sec. 25 Twp 29 Rng 7Name of Well/Wells or Pipeline Serviced SAN JUAN 29-7 UNIT #74, #518

cps 108w

Elevation 6374' Completion Date 10/11/67 Total Depth 245' Land Type* N/ACasing, Sizes, Types & Depths N/AIf Casing is cemented, show amounts & types used N/AIf Cement or Bentonite Plugs have been placed, show depths & amounts used
N/ADepths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. 140'**RECEIVED**
MAY 31 1991Depths gas encountered: N/A**OIL CON. DIV**
DISTType & amount of coke breeze used: 3960 lbs.Depths anodes placed: 204', 198', 192', 186', 180', 174', 168', 162'Depths vent pipes placed: 204' OF 3/4" HOSEVent pipe perforations: 160'Remarks: gb #2

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

Poster

Date 10-11-67

4 1/2" Rock - No. 9836 = 200'

Well Name <u>SW 29-7 No. 74 - No. 2 G.B.</u>				CPS No. <u>108W</u>	
Location <u>SW 25-29-7</u>				Work Order No. <u>184-40517-50-20</u>	
Anode Hole Depth <u>245</u>	Total Drilling Rig Time <u>20</u>	Type & Size Bit Used <u>7 7/8-753335-245</u>		No. Sacks Mud Used <u>1</u>	
No. Sacks Lost Circulation Mat'l Used <u>1</u>	Anode Depth				
	# 1 <u>204</u>	# 2 <u>198</u>	# 3 <u>192</u>	# 4 <u>186</u>	# 5 <u>180</u> # 6 <u>174</u>
Total Lbs. Coke Used <u>3960</u>	Anode Output (Volts)				
	# 1 <u>4.6</u>	# 2 <u>5.3</u>	# 3 <u>5.2</u>	# 4 <u>5.0</u>	# 5 <u>4.7</u> # 6 <u>4.9</u>
Total Circuit Resistance	No. Ft. Surface Cable Conduit				
Volts <u>12.4</u> Amps <u>11.2</u> Ohms <u>1.10~</u>	<u>1624 on Anodes - 132 surface</u>		<u>1756</u>		
Drilling Log (Attach Hereto). ☐	<u>7 168</u>		<u>8 162</u>		
Remarks:	<u>7 5.0</u>		<u>8 4.0</u>		


3/4" Hose to No. 1 Anode - Perforated 160'
15 lbs Barafos Circulated thru. Hole

All Construction Completed

Daniel

(Signature)

GROUND BED LAYOUT SKETCH

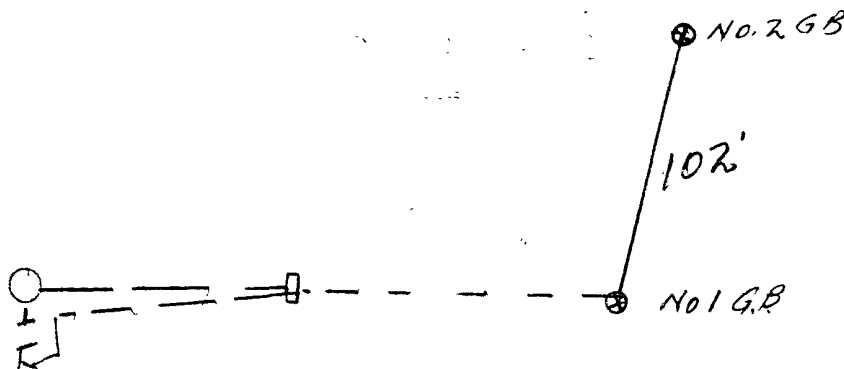

DAILY DRILLING REPORT

LEASE 4 1/2 Roddy no 9836 200 CONTRACTOR Alvord Mfg RIG NO. 19

MORNING WELL NO 103W DAYLIGHT 8 REPORT NO. 19 DATE 10-11-67

Driller					Total Man In Crew					Driller					Total Man In Crew														
FROM	TO	FORMATION	WT. BIT	R.P.M.	FROM	TO	FORMATION	WT. BIT	R.P.M.	FROM	TO	FORMATION	WT. BIT	R.P.M.	FROM	TO	FORMATION	WT. BIT	R.P.M.										
0	50	411			140	190	SH																						
50	100	55			190	200	SH																						
100	135	SH			200	215	SH																						
135	140	55			215	245	55																						
BIT NO. 753335					NO. DC. SIZE 245 LENG. 1					BIT NO.					NO. DC. SIZE LENG.														
SERIAL NO.					STANDS					SERIAL NO.					STANDS														
SIZE					SINGLES					SIZE					SINGLES														
TYPE					DOWN ON KELLY					TYPE					DOWN ON KELLY														
MAKE					TOTAL DEPTH					MAKE					TOTAL DEPTH														
MUD RECORD					MUD, ADDITIVES USED AND RECEIVED					MUD RECORD					MUD, ADDITIVES USED AND RECEIVED														
Time					Time					Time					Time														
WT.	VIS.				WT.	VIS.				WT.	VIS.				WT.	VIS.													
FROM					TO					FROM					TO					FROM					TO				
TIME BREAKDOWN					TIME BREAKDOWN					TIME BREAKDOWN					TIME BREAKDOWN					TIME BREAKDOWN					TIME BREAKDOWN				
										</																			