

6- 30-045-09228
1A- 30-045-21726

4567

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit NW Sec. 29 Twp 30 Rng 9

Name of Well/Wells or Pipeline Serviced MANSFIELD #6, MANSFIELD #1A,
MANSFIELD COM #251 cps 65w

Elevation 6027' Completion Date 10/13/69 Total Depth 310' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. 160'

Depths gas encountered: N/A

Type & amount of coke breeze used: 4500 lbs.

Depths anodes placed: 272', 262', 252', 227', 221', 209', 203', 197'

Depths vent pipes placed: 262' OF 3/4" HOSE

Vent pipe perforations: 262'

Remarks: Log #2 EPOXY POURED ABOVE SHRINK SLEEVE

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

RECEIVED

MAY 31 1991

OIL CON. DIV
DIST. 3

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

5'8" #132 = 68
-5" #78743 = 192

Drilling Log (Attach Hereto). ☐

No. 2 GND BED

Completion Date 10-13-69

Well Name Mansfield #6		Location NKK 29-30-9		CPS No. 65W	
Type & Size Bit Used 7/8" #10434 = 200, 7/8" #28104 = 110		Work Order No. 184-54224-50-20			
Anode Hole Depth 310	Total Drilling Rig Time 29 Hrs	Total Lbs. Coke Used 4500 (45 sacks)	Lost Circulation Mat'l Used 0	No. Sacks Mud Used 2	
Anode Depth					
#1 272	#2 262	#3 252	#4 227	#5 221	#6 209
#7 203	#8 197	#9	#10		
Anode Output (Amps)					
#1 2.7	#2 3.2	#3 3.2	#4 2.7	#5 3.1	#6 3.0
#7 3.9	#8 4.2	#9	#10		
Anode Depth					
#11	#12	#13	#14	#15	#16
#17	#18	#19	#20		
Anode Output (Amps)					
#11	#12	#13	#14	#15	#16
#17	#18	#19	#20		
Total Circuit Resistance				No. 8 C.P. Cable Used	No. 2 C.P. Cable Used
Volts 12.5	Amps 10.5	Ohms 1.25		2158	0


Remarks: 3/4" Hose to No 2 Anode. Perforated 171
50 lbs Sacrifices

Epoxy bonded above shrink sleeve

All Construction Completed

Harcis
(Signature)

GROUND BED LAYOUT SKETCH

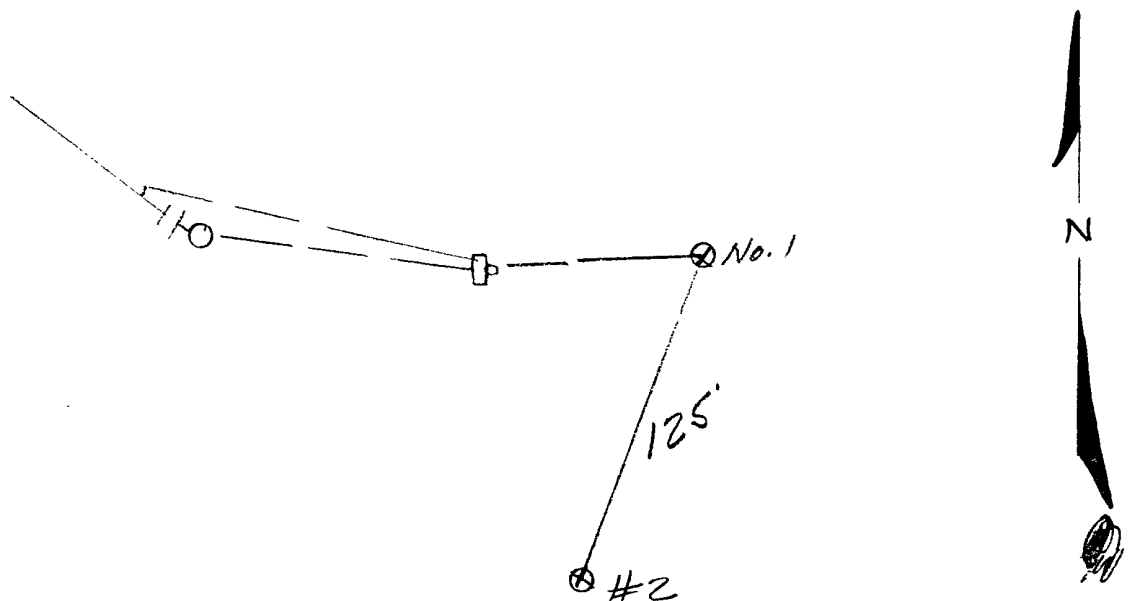

DRILLING DEPARTMENT

LEASE

[illegible]

SIGNED: Toolpusher

Company: Supervisori