

5- 30-039-07716
446- 30-039-24590

4473

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit SW Sec. 35 Twp 30 Rng 6

Name of Well/Wells or Pipeline Serviced SAN JUAN 30-6 UNIT #5, #446

193w

Elevation 6540' Completion Date 5/28/69 Total Depth 360' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. WET AT 110', 200' WATER AT 230' - 240'

Depths gas encountered: N/A

Type & amount of coke breeze used: 4680 lbs.

Depths anodes placed: 342', 336', 330', 324', 305', 275', 269', 263'

Depths vent pipes placed: 336' OF 3/4" HOSE

Vent pipe perforations: 340'

Remarks: qb #2

RECEIVED
MAY 31 1991
OIL CON. DIV
DIST. 3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG
No. 2 GND BED

Drilling Log (Attach Hereto). ☐

Completion Date *5-28-69*

Well Name <i>SW 30-6 #5-35</i>				Location <i>SW 35-30-6</i>				CPS No. <i>193W</i>	
Type & Size Bit Used <i>7 7/8 - 37874 = 360' - 5 1/8 Insert = 360'</i>				Work Order No. <i>184-40081-50-20</i>					
Anode Hole Depth <i>360</i>		Total Drilling Rig Time <i>16 Hrs</i>		Total Lbs. Coke Used <i>4680</i>		Lost Circulation Mat'l Used <i>0</i>		No. Sacks Mud Used <i>0</i>	
Anode Depth									
# 1 <i>342</i>	# 2 <i>336</i>	# 3 <i>330</i>	# 4 <i>324</i>	# 5 <i>305</i>	# 6 <i>275</i>	# 7 <i>269</i>	# 8 <i>263</i>	# 9	# 10
Anode Output (Amps)									
# 1 <i>5.3</i>	# 2 <i>5.2</i>	# 3 <i>5.0</i>	# 4 <i>3.9</i>	# 5 <i>3.2</i>	# 6 <i>4.3</i>	# 7 <i>4.3</i>	# 8 <i>4.0</i>	# 9	# 10
Anode Depth									
# 11	# 12	# 13	# 14	# 15	# 16	# 17	# 18	# 19	# 20
Anode Output (Amps)									
# 11	# 12	# 13	# 14	# 15	# 16	# 17	# 18	# 19	# 20
Total Circuit Resistance				No. 8 C.P. Cable Used <i>2756</i>				No. 2 C.P. Cable Used	
Volts <i>12.2</i>		Amps <i>10.7</i>		Ohms <i>1.14</i>		<i>2604 Anodes in surface</i>		<i>0</i>	


Remarks:

3/4" Hose to No. 2 Anode Perforated 340'
50 lbs Barafos used.

All Construction Completed

Amels
(Signature)

GROUND BED LAYOUT SKETCH

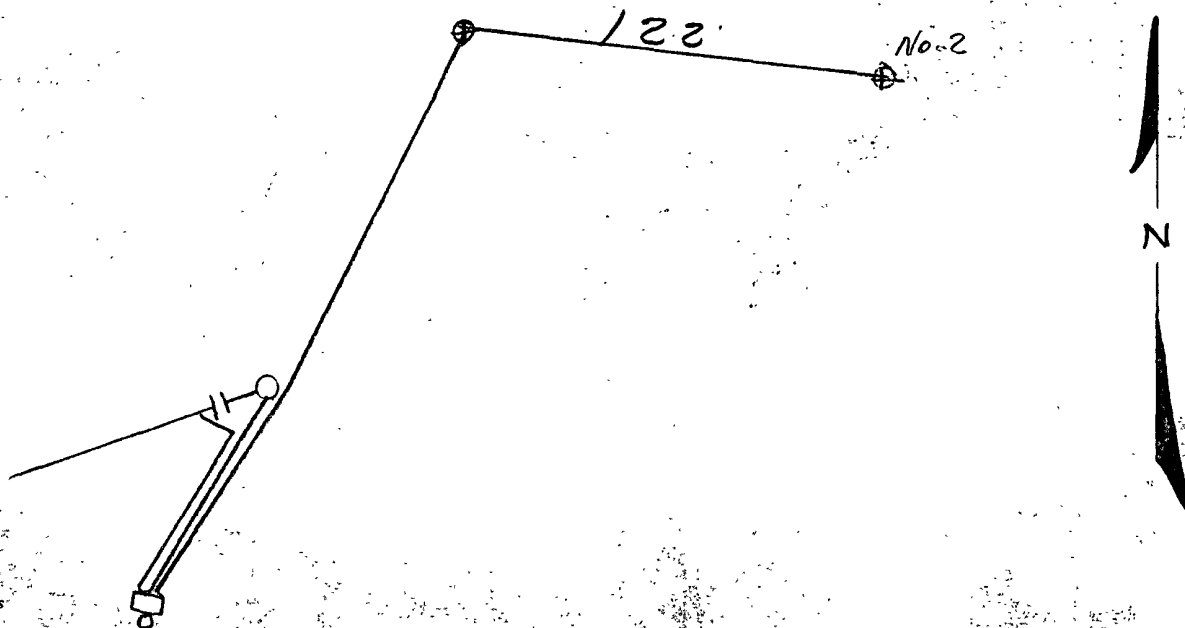

DAILY DRILLING REPORT

১৭৭৭

TEAM JON: 1933

CONTRACTOR

James J. Connelley

PERSONAL ORIGINAL

REPORT NO.

DATE

19

[illegible]

SIGNED: Toolusher.

Company Supervisors