

3- 30-045-23514

4575

8- 30-045-20117

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator TENNECO Location: Unit NE Sec. 8 Twp 29 Rng Name of Well/Wells or Pipeline Serviced DAY A #3, DAY A #8

cps 70w

Elevation 6463' Completion Date 9/24/69 Total Depth 570' Land Type* N/ACasing, Sizes, Types & Depths N/AIf Casing is cemented, show amounts & types used N/AIf Cement or Bentonite Plugs have been placed, show depths & amounts used
N/ADepths & thickness of water zones with description of water when possible
Fresh, Clear, Salty, Sulphur, Etc. N/A**RECEIVED**
MAY 31 1991.Depths gas encountered: N/A**OIL CON. DIV.**
ST 3Type & amount of coke breeze used: 8800 lbs.Depths anodes placed: 524', 518', 512', 506', 322', 316', 307', 301'Depths vent pipes placed: 518' OF 3/4" HOSEVent pipe perforations: 340'Remarks: gb #2 PLASTIC MOLD USED TO CAP ANODES. EPOXY POURED ABOVESHRINK SLEEVE. not a MERIDIAN well.

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be include

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

#205 = 370'
#62499 = 230'
Drilling Log (Attach Hereto). ☐

Completion Date 9/24/69

Well Name DAY #3A		Location NE 8-29-8		CPS No. 70 W	
Type & Size Bit Used 7/8 JP954 = 570'				Work Order No. 184-52148-50-20	
Anode Hole Depth 570'	Total Drilling Rig Time 44 hr.	Total Lbs. Coke Used 8800#	Lost Circulation Mat'l Used 0	No. Sacks Mud Used 10	
Anode Depth					
# 1 524'	# 2 518'	# 3 512'	# 4 506'	# 5 322'	# 6 316'
# 7 307'	# 8 301'	# 9	# 10		
Anode Output (Amps)					
# 1 3.5	# 2 3.9	# 3 3.6	# 4 3.1	# 5 3.6	# 6 3.5
# 7 4.3	# 8 4.9	# 9	# 10		
Anode Depth					
# 11	# 12	# 13	# 14	# 15	# 16
# 17	# 18	# 19	# 20		
Anode Output (Amps)					
# 11	# 12	# 13	# 14	# 15	# 16
# 17	# 18	# 19	# 20		
Total Circuit Resistance				No. 8 C.P. Cable Used	No. 2 C.P. Cable Used
Volts 12.5	Amps 10.8	Ohms 1.16		3606'	0


Remarks: 3/4" VENT hose purferated 340' Tied To #2 Anode

PLASTIC MODD used To CAP Anodes. EPOXY Pooled ABOVE SHRIK SLEEVE.

All Construction Completed

JE Smith + OHS
(Signature)

GROUND BED LAYOUT SKETCH

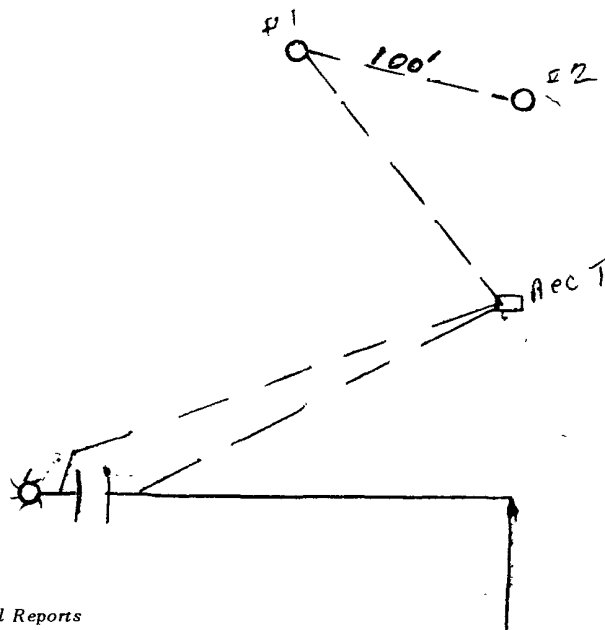

EL PASO NATURAL GAS COMPANY
DRILLING DEPARTMENT

DAILY DRILLING REPORT

Insert # 205 (370 FT.)

LEASE _____ WELL NO. **70 W** CONTRACTOR **Monnick Const.** RIG NO. **146** REPORT NO. _____ DATE _____ 19

MORNING

DAYLIGHT

EVENING

Driller _____ Total Men In Crew _____					Driller _____ Total Men In Crew _____					Driller _____ Total Men In Crew _____				
FROM	TO	FORMATION	WT-BIT	R.P.M.	FROM	TO	FORMATION	WT-BIT	R.P.M.	FROM	TO	FORMATION	WT-BIT	R.P.M.
0	210	Shale + ss			250	260	SS			380	420	SS + Shale str		
210	225	SS			260	280	Shale			420	430	Shale		
225	225	Shale			280	340	Shale + SS str			430	600	SS + Shale str		
225	250	Shale + SS str			340	380	SS							

Driller _____ Total Men In Crew _____			Driller _____ Total Men In Crew _____			Driller _____ Total Men In Crew _____		
NO. DC	SIZE	LENG.	NO. DC	SIZE	LENG.	NO. DC	SIZE	LENG.
BIT NO.			BIT NO.			BIT NO.		
SERIAL NO. 62499	STANDS		SERIAL NO. JP 954	STANDS		SERIAL NO.	STANDS	
SIZE 5" (230 FT.)	SINGLES		SIZE 7 1/2" (570 FT.)	SINGLES		SIZE	SINGLES	
TYPE	DOWN ON KELLY		TYPE	DOWN ON KELLY		TYPE	DOWN ON KELLY	
MAKE	TOTAL DEPTH		MAKE	TOTAL DEPTH		MAKE	TOTAL DEPTH	

MUD RECORD			MUD, ADDITIVES USED AND RECEIVED			MUD RECORD			MUD, ADDITIVES USED AND RECEIVED			MUD RECORD			MUD, ADDITIVES USED AND RECEIVED		
Time	Wt.	Vis.	Time	Wt.	Vis.	Time	Wt.	Vis.	Time	Wt.	Vis.	Time	Wt.	Vis.	Time	Wt.	Vis.

FROM	TO	TIME BREAKDOWN	FROM	TO	TIME BREAKDOWN	FROM	TO	TIME BREAKDOWN

REMARKS -	REMARKS -	REMARKS -
9-15-69 - left old loc 10 ³⁰ AM - moved rigged up & drilled 320 FT. 5" Hole. left rig 5 PM.		
9-16-69 - left yd 6 AM arrived rig 7 AM went in Hole. Approx. 90 ft. water in hole after standing all night. Changed to water & Drilled from 320 FT. To 600 FT. left rig 5 PM.		
9-17-69 - left yd 6 AM arrived rig 7 AM Started reaming with 7 1/2" bit from 0 - 420 FT. Twisted off pipe at 1 AM fishing from 1 AM - 7 AM. left rig 7 AM.		
9-23-69 - left yd 6 AM arrived rig 7 AM went in Hole, water standing at 180 FT. Pumped from 320 FT. to Bottom at 420 mixed SS & gel to stop caving. Drilled from 420 - 570 FT. left rig 6 PM.		
9-24-69 - left yd 6 AM arrived rig 7 AM went in Hole, water standing 180 FT. Thinned down & logged Hole, left loc. 11 AM		

SIGNED: Toolpusher _____

Company Supervisor _____

[Signature]