

4468

30-039-60098

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit SW Sec. 24 Twp 30 Rng 6

Name of Well/Wells or Pipeline Serviced SAN JUAN 30-6 UNIT #3

cps 191w

Elevation 6663' Completion Date 6/23/69 Total Depth 540' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. N/A

RECEIVED
MAY 31 1991

Depths gas encountered: N/A

CON. DIV.
DIST. 3

Type & amount of coke breeze used: 7200 lbs.

Depths anodes placed: 470', 464', 458', 452', 446', 434', 428', 422'

Depths vent pipes placed: 464' OF 3/4" HOSE

Vent pipe perforations: 464'

Remarks: qb #2 ALL ANODES CAPPED WITH FOAM MOLD. APPROX. 1" OF SHRINK SLEEVE EXPOSED
ABOVE EPOXY.

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

Drilling Log (Attach Hereto). ☐

Completion Date 6-23-69

Well Name <u>SJ 30-6 #3-24</u>		Location <u>SW 24--30-6</u>		CPS No. <u>191 W</u>	
Type & Size Bit Used <u>7 7/8-65713=440, 15560=100-5 1/8" insert # 114=540</u>		Work Order No. <u>184-40069-50-20</u>			
Anode Hole Depth <u>540</u>	Total Drilling Rig Time <u>46 1/2</u>	Total Lbs. Coke Used <u>7200</u>	Lost Circulation Mat'l Used <u>0</u>	No. Sacks Mud Used <u>3</u>	
Anode Depth					
# 1 <u>470</u>	# 2 <u>464</u>	# 3 <u>458</u>	# 4 <u>452</u>	# 5 <u>446</u>	# 6 <u>434</u>
Anode Output (Amps)					
# 1 <u>3.8</u>	# 2 <u>3.5</u>	# 3 <u>3.6</u>	# 4 <u>3.5</u>	# 5 <u>4.0</u>	# 6 <u>4.5</u>
Anode Depth					
# 11	# 12	# 13	# 14	# 15	# 16
Anode Output (Amps)					
# 11	# 12	# 13	# 14	# 15	# 16
Total Circuit Resistance					
Volts <u>12.7</u>	Amps <u>11.3</u>	Ohms <u>1.12</u>	No. 8 C.P. Cable Used <u>3894</u>		No. 2 C.P. Cable Used <u>0</u>
3734 on Anodes, 160 surface					

Remarks:

3/4" Hose to No. 2 Anode, Perforated All
50 lbs Barafos used


All Anodes capped with Foam Mold. Approx
1" of shrink sleeve EXposed above Epoxy

copy of this report in
Rectifier

All Construction Completed

Amels
(Signature)

GROUND BED LAYOUT SKETCH

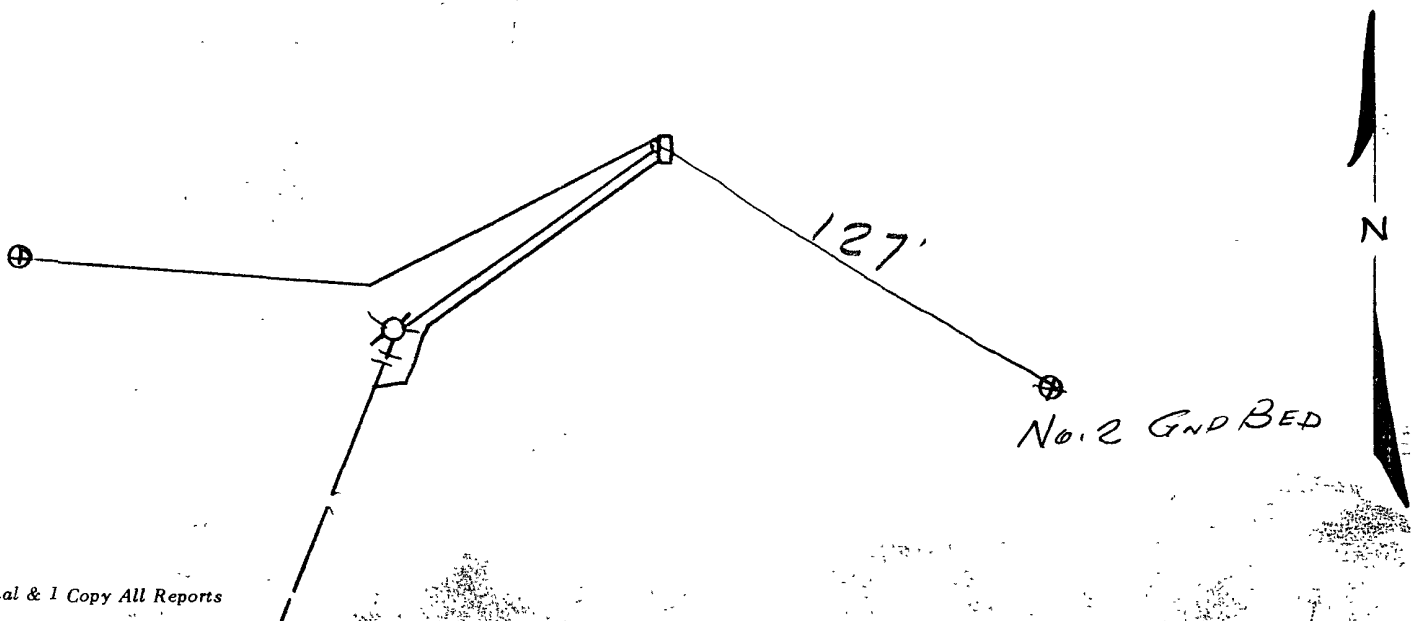

DAILY DRILLING REPORT

REPORT NO.

DAYLIGHT

EVENING

19

REMARKS

David

SIGNED: Toolbuster

Autumn Company