

52- 30-039-07664
101- 30-039-20082 4348

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit NE Sec. 7 Twp 29 Rng 7

Name of Well/Wells or Pipeline Serviced SAN JUAN 29-7 UNIT #52, #101

cps 297w

Elevation 6177' Completion Date 8/29/68 Total Depth 500' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. N/A

Depths gas encountered: N/A

Type & amount of coke breeze used: 6000 lbs.

Depths anodes placed: 482', 476', 470', 464', 458', 428', 422', 416', 403', 397'


Depths vent pipes placed: 476' OF 3/4" HOSE

Vent pipe perforations: 482'

Remarks: qb #2

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

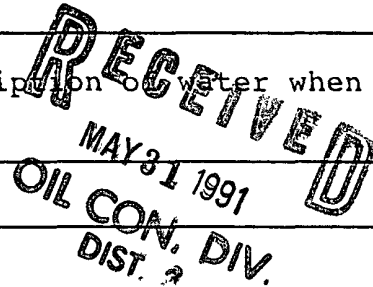

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

38183, 4 3/4" 290'
38183, 4 1/2" = 210'

Date 8-29-68

Well Name S.J. 29-7 #101				CPS No. 856 W			
Location NE 7-29-7				Work Order No. 184-40604-50-20			
Anode Hole Depth 500	Total Drilling Rig Time 27 Hrs.	Type & Size Bit Used 6 3/4-278851-500		No. Sacks Mud Used 3			
No. Sacks Lost Circulation Mat'l Used 1	Anode Depth						
	#1 482	#2 476	#3 470	#4 464	#5 458	#6 428	
Total Lbs. Coke Used 6000	Anode Output (Volts)						
	#1 3.0	#2 2.7	#3 3.6	#4 3.4	#5 2.5	#6 2.4	
Total Circuit Resistance Volts 13.0	Amps 11.0	Ohms 1.18	No. Ft. Surface Cable Conduit 2721 surface 4586 Anodes = 7307				
Drilling Log (Attach Hereto) ☐			7 422	8 416	9 403	10 397	
Remarks:			7 2.6	8 2.4	9 2.4	10 2.5	


Static 600 SW = .92 100 lbs salt 50 lbs Borafos
3/4" Hose to No 2 Anode, Perforated 482'

Install P.E.M. Rectifier Ser. # 637183

All Construction Completed

Arreals
(Signature)

GROUND BED LAYOUT SKETCH

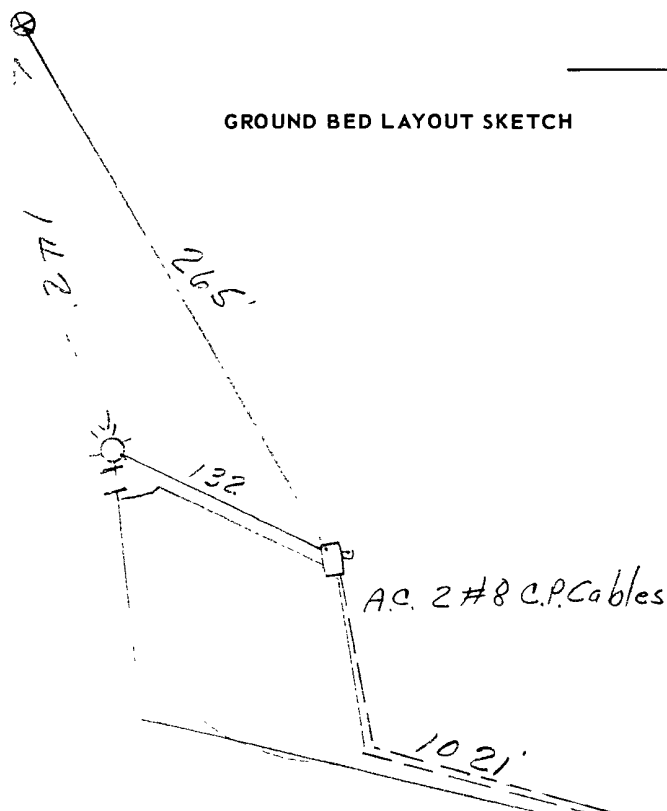

856 DAILY DRILLING REPORT

PLEASE

WELL NO. 8464

CONTRACTOR *M. M. M. Co.*

RIG NO. 146

REPORT NO.

DATE _____

10

MORNING

DAYLIGHT

EVENING

Driller					Total Men In Crew					Driller					Total Men In Crew				
FROM	TO	FORMATION	WT. BIT	R.P.M.	FROM	TO	FORMATION	WT. BIT	R.P.M.	FROM	TO	FORMATION	WT. BIT	R.P.M.					
0	60	SS			160	210	SS			240	320	SS							
60	90	Shale			210	220	Shale			320	500	Shale + SS streaks							
90	120	SS			220	270	SS												
120	160	Shale			270	280	Shale												

NO. DC	SIZE	LENG.	NO. DC	SIZE	LENG.	NO. DC	SIZE	LENG.
BIT NO.	NO. DC	SIZE	LENG.	BIT NO.	NO. DC	SIZE	LENG.	BIT NO.
SER NO.	STANDS	SERIAL NO.	STANDS	SERIAL NO.	SERIAL NO.	STANDS	SERIAL NO.	STANDS
SIZE	SINGLES	SIZE	SINGLES	SIZE	SIZE	SINGLES	SIZE	SINGLES
TYPE	DOWN ON KELLY	TYPE	DOWN ON KELLY	TYPE	TYPE	DOWN ON KELLY	TYPE	DOWN ON KELLY
MAKE	TOTAL DEPTH	MAKE	TOTAL DEPTH	MAKE	MAKE	TOTAL DEPTH	MAKE	TOTAL DEPTH

[illegible]

REMARKS -

REMARKS:—

REMARKS -

DATE	TIME	MARKS	REMARKS
8-26-68	Left old loc. 11 AM. Moved up ridge. A. killed 3901. 4 1/2" hole. Left sec. 4 (m).		
8-27-68	Left old loc. 9 AM. Arrived in 7 AM. Found an hole. A. killed from 3901 to 500 ft. with 4 1/2". A. J. named. Bury to 100 ft. with 6 3/4" of this. 5 PM.		
8-28-68	Left old loc. 6 AM. Arrived in 7 AM. Found an hole. A. killed from 100 ft to 500 ft. with 4 1/2". Left sec. 5 PM.		
8-29-68	Left old loc. 7 AM. Arrived in 8 AM. Found an hole. A. killed from 100 ft to 500 ft. with 4 1/2". Left sec. 12 PM.		

SIGNED: Toolpusher

Company Supervisor

Handwritten signature: *Handwritten signature*