

#1 = 30-045-07038
#8 = 30-045-20336

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit NE Sec. 35 Twp 28 Rng 8

Name of Well/Wells or Pipeline Serviced HOWELL #1, #8

cps 530w

Elevation 6208' Completion Date 10/19/73 Total Depth 600' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. 300'

RECEIVED

MAY 31 1991

Depths gas encountered: N/A

OIL CON. DIV
DIST. 3

Type & amount of coke breeze used: 4300 lbs.

Depths anodes placed: 570, 550, 540, 530, 520, 510, 500, 490, 480, 465, 455, 445, 435,
425, 415, 405, 395, 385, 375, 36

Depths vent pipes placed: N/A

Vent pipe perforations: 490'

Remarks: Agb #2 AGREEMENT MADE W/ C.P.S. FOR 10 MORE ANODES. COULD NOT GET PUMP HOSE

PAST 490'.

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

logged

Drilling Log (Attach Hereto) ☐

Completion Date **10/18/73**

Well Name: Howell #1 & #8		Location: NESS-28-8		CPS No. 530W																																																																																																									
Type & Size Bit Used: 6 3/4		Work Order No. 52003 & 54616																																																																																																											
Anode Hole Depth: 600	Total Drilling Rig Time	Total Lbs. Coke Used: 4,300	Lost Circulation Mat'l Used	No. Sacks Mud Used																																																																																																									
<table border="1"> <tr> <td colspan="2">Anode Depth</td> <td colspan="2">#1 570</td> <td colspan="2">#2 550</td> <td colspan="2">#3 540</td> <td colspan="2">#4 530</td> <td colspan="2">#5 520</td> <td colspan="2">#6 510</td> <td colspan="2">#7 500</td> <td colspan="2">#8 490</td> <td colspan="2">#9 480</td> <td colspan="2">#10 465</td> </tr> <tr> <td colspan="2">Anode Output (Amps)</td> <td colspan="2">#1 1.8</td> <td colspan="2">#2 1.5</td> <td colspan="2">#3 1.7</td> <td colspan="2">#4 2.5</td> <td colspan="2">#5 2.7</td> <td colspan="2">#6 1.9</td> <td colspan="2">#7 2.1</td> <td colspan="2">#8 1.8</td> <td colspan="2">#9 2.4</td> <td colspan="2">#10 2.7</td> </tr> <tr> <td colspan="2">Anode Depth</td> <td colspan="2">#11 455</td> <td colspan="2">#12 445</td> <td colspan="2">#13 435</td> <td colspan="2">#14 425</td> <td colspan="2">#15 415</td> <td colspan="2">#16 405</td> <td colspan="2">#17 395</td> <td colspan="2">#18 385</td> <td colspan="2">#19 375</td> <td colspan="2">#20 365</td> </tr> <tr> <td colspan="2">Anode Output (Amps)</td> <td colspan="2">#11 1.9</td> <td colspan="2">#12 1.9</td> <td colspan="2">#13 1.8</td> <td colspan="2">#14 1.7</td> <td colspan="2">#15 1.8</td> <td colspan="2">#16 1.6</td> <td colspan="2">#17 1.6</td> <td colspan="2">#18 1.7</td> <td colspan="2">#19 1.7</td> <td colspan="2">#20 1.6</td> </tr> <tr> <td colspan="2">Total Circuit Resistance</td> <td colspan="2">Volts 11.8</td> <td colspan="2">Amps 12.0</td> <td colspan="2">Ohms 0.98</td> <td colspan="2">No. 8 C.P. Cable Used: 378'</td> <td colspan="2">No. 2 C.P. Cable Used</td> <td colspan="4"></td> </tr> </table>						Anode Depth		#1 570		#2 550		#3 540		#4 530		#5 520		#6 510		#7 500		#8 490		#9 480		#10 465		Anode Output (Amps)		#1 1.8		#2 1.5		#3 1.7		#4 2.5		#5 2.7		#6 1.9		#7 2.1		#8 1.8		#9 2.4		#10 2.7		Anode Depth		#11 455		#12 445		#13 435		#14 425		#15 415		#16 405		#17 395		#18 385		#19 375		#20 365		Anode Output (Amps)		#11 1.9		#12 1.9		#13 1.8		#14 1.7		#15 1.8		#16 1.6		#17 1.6		#18 1.7		#19 1.7		#20 1.6		Total Circuit Resistance		Volts 11.8		Amps 12.0		Ohms 0.98		No. 8 C.P. Cable Used: 378'		No. 2 C.P. Cable Used					
Anode Depth		#1 570		#2 550		#3 540		#4 530		#5 520		#6 510		#7 500		#8 490		#9 480		#10 465																																																																																									
Anode Output (Amps)		#1 1.8		#2 1.5		#3 1.7		#4 2.5		#5 2.7		#6 1.9		#7 2.1		#8 1.8		#9 2.4		#10 2.7																																																																																									
Anode Depth		#11 455		#12 445		#13 435		#14 425		#15 415		#16 405		#17 395		#18 385		#19 375		#20 365																																																																																									
Anode Output (Amps)		#11 1.9		#12 1.9		#13 1.8		#14 1.7		#15 1.8		#16 1.6		#17 1.6		#18 1.7		#19 1.7		#20 1.6																																																																																									
Total Circuit Resistance		Volts 11.8		Amps 12.0		Ohms 0.98		No. 8 C.P. Cable Used: 378'		No. 2 C.P. Cable Used																																																																																																			

Remarks: Driller said water at 300', water standing at 360' 12 hrs after stop drilling. Vent hose perforated 490'. Could not get pump hose past 490' AN AGREEMENT WAS MADE WITH C.P.S. THAT THEY COULD INSTALL 10 MORE ANODES UP HOLE AND INCLUDE 10 BOTTOM ANODES PAY FOR 10 ANODE 500' GEL

ANODES 1-10 TOTAL = 11.8V 9.5A 1.24

ANODES 11-20 TOTAL = 11.8V 7.0A 1.68

PUMPED 23 SACKS CORE


SLURRY 20 SACKS COM.

ANODES 1-9 NO CORE BREEZE

All Construction Completed

Edward R. Pankh
(Signature)

GROUND BED LAYOUT SKETCH

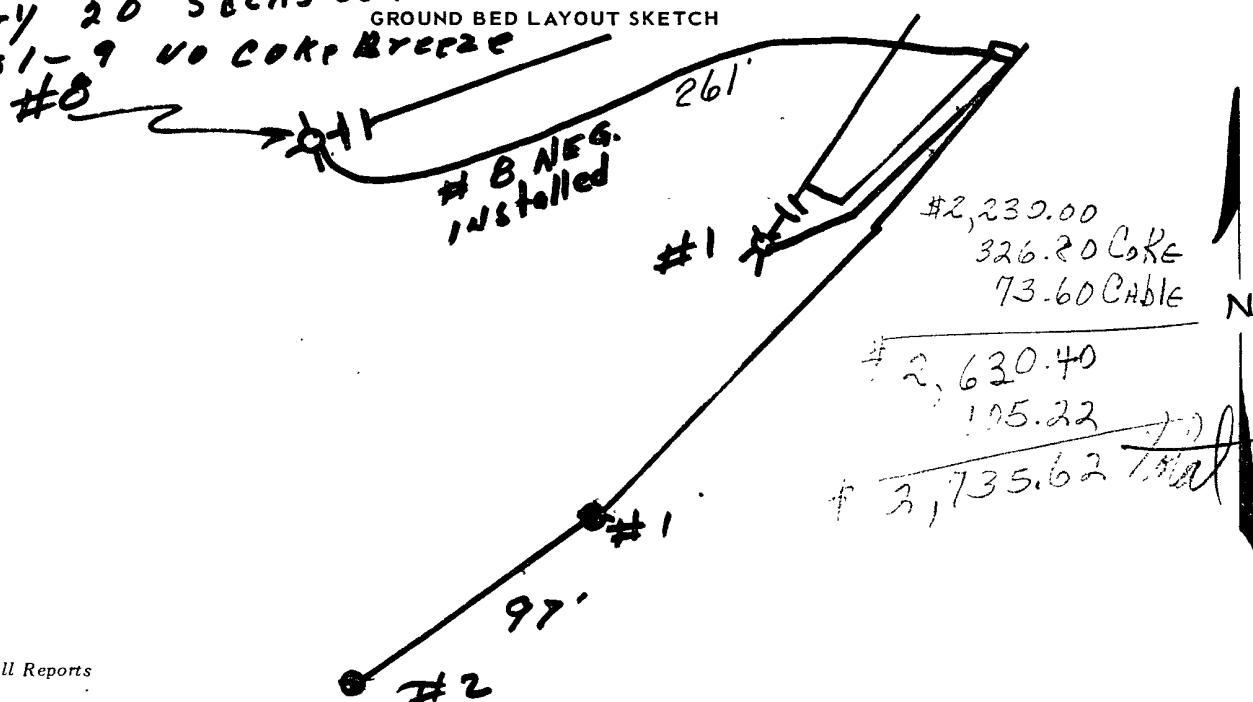

DRILLING DEPARTMENT

DAILY DRILLING REPORT

CPS # 530-W

[illegible]

SIGNED: Toolpusher

____ Company Supervisor.

