

952 #60 30-039-07381
#125 30-039-20060
#456 30-039-24912

8

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit NE Sec 21 Twp 28 Rng 6

Name of Well/Wells or Pipeline Serviced SAN JUAN 28-6 UNIT #60, #125, #456
cps 1163w

Elevation 6460' Completion Date 8/3/77 Total Depth 380' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. 85' - 100' & 280'

Depths gas encountered: N/A

Type & amount of coke breeze used: 46 SACKS

Depths anodes placed: 345', 335', 325', 315', 305', 245', 235', 225', 215', 205'

Depths vent pipes placed: 350'

Vent pipe perforations: 300'

Remarks: gb #1

RECEIVED

MAY 31 1991

OIL CON. DIV.
DIST 3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

ing $\text{Log} \tilde{\gamma}$ (Attach Hereto).

Completion Date 8-3-77

Name JUAN 28-6 UNIT # 60 125		Location NE 21-28-6		CPS No. 1163 W					
Size Bit Used 6 3/4"				Work Order No. #60 = 40014.19 #125 = 54522.19					
Hole Depth 380 - 368		Total Drilling Rig Time		Total Lbs. Coke Used 46					
Lost Circulation Mat'l Used		No. Sacks Mud Used							
Depth	# 2	# 3	# 4	# 5	# 6	# 7	# 8	# 9	# 10
345	335	325	315	305	245	235	225	215	205
Output (Amps)	# 2	# 3	# 4	# 5	# 6	# 7	# 8	# 9	# 10
3.4	3.6	3.0	3.0	3.1	4.1	4.1	3.7	3.8	2.7
Depth	# 12	# 13	# 14	# 15	# 16	# 17	# 18	# 19	# 20
Output (Amps)	# 12	# 13	# 14	# 15	# 16	# 17	# 18	# 19	# 20
Circuit Resistance	11.8 Amps 16.0 Ohms 0.74				No. 8 C.P. Cable Used		No. 12 C.P. Cable Used		

ks: Static #60 600' SW = 0.77, Static #125 600' W = 0.76.

Installed 10-2"x2"x48" Graphite Anodes. Driller said

2 King water between 85' & 100'. DRilled to 220'. next A.M. water

* Landing @ 100'. DRILLER SAID MAKING MORE WATER @ 280'. PERFORATED.

300' of 1" PVC Vent Pipe. Installed 350' of 1" PVC Vent Pipe. Slurried


46 SACKS OF COKE. #60 MARKED 3 NOTCHES, #125 MARKED 1 NOTCH

Installed 60V 30A Rectifier & 20' Meter Pole

All Construction Completed

W. F. Luth
(Signature)

GROUND BED LAYOUT SKETCH

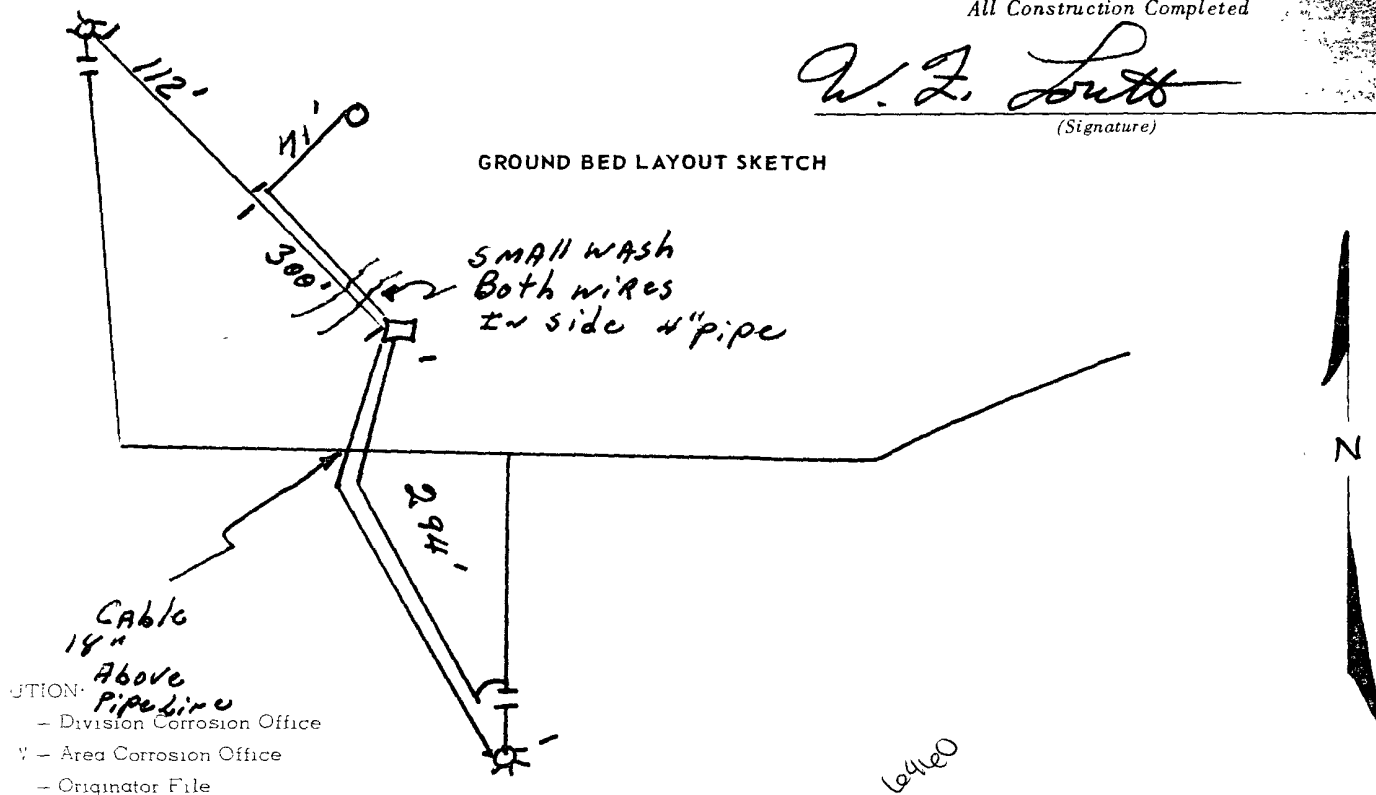

LEASE

WELL NO.

CONTRACTOR

RIG NO.

REPORT NO.

DATE _____

19

SIGNED: Toolpusher

____ Company Supervisor