

30-045-09450

4901

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit SE Sec. 18 Twp 30 Rng 10

Name of Well/Wells or Pipeline Serviced SCHUMACHER #4

cps 808w

Elevation N/A Completion Date 10/9/68 Total Depth 400' Land Type* N.A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used

N/A

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. N/A

Depths gas encountered: N/A


Type & amount of coke breeze used: 6120 lbs.

Depths anodes placed: 355', 349', 343', 337', 301', 295', 289', 283', 277', 258', 252'

Depths vent pipes placed: 355' OF 3/4" HOSE

Vent pipe perforations: 355'

Remarks: PLUGGED AND ABANDONED.

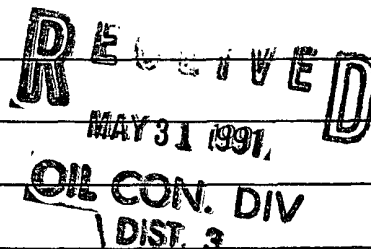

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

Date 10-9-68

Air with Contr. Bit

Well Name <i>Schumacher #4</i>			CPS No. <i>808W</i>		
Location <i>SE 18-30-10</i>			Work Order No. <i>184-52230-50-20</i>		
Anode Hole Depth <i>400</i>	Total Drilling Rig Time <i>32 1/2 Hrs</i>	Type & Size Bit Used <i>7 7/8 842183 = 400</i>	No. Sacks Mud Used <i>2</i>		
No. Sacks Lost Circulation Mat'l Used <i>1</i>	Anode Depth				
	#1 <i>355</i>	#2 <i>349</i>	#3 <i>343</i>	#4 <i>337</i>	#5 <i>301</i>
Total Lbs. Coke Used <i>6120</i>	Anode Output (Volts)				
	#1 <i>4.4</i>	#2 <i>2.7</i>	#3 <i>3.0</i>	#4 <i>2.4</i>	#5 <i>3.7</i>
Total Circuit Resistance	No. Ft. Surface Cable Conduit				
Volts <i>12.6</i>	Amps <i>15.5</i>	Ohms <i>0.81</i>	<i>38160W Anodes 375 Surface 4191</i>		
Drilling Log (Attach Hereto) ☐	7 <i>289</i>	8 <i>283</i>	9 <i>277</i>	10 <i>258</i>	11 <i>252</i>
Remarks:	7 <i>5.0</i>	8 <i>5.1</i>	9 <i>3.6</i>	10 <i>3.4</i>	11 <i>3.3</i>
					12 <i>3.0</i>

Rgs 600' NE = 0.76



*3/4" Hose to No. 1 Anode, Perforated All
100 lbs Barafos*

Note - No's 2, 3 & 4 Anode Did Not Respond to Coke -

Construction Completed

Samuels
(Signature)

GROUND BED LAYOUT SKETCH

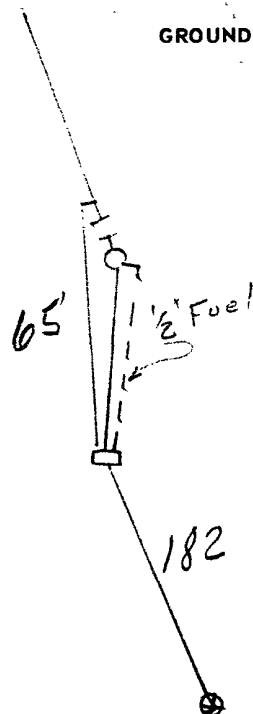

80808

LEASE Edmundson WELL NO. 44

CONTRACTOR **W.H. FLY** RIG NO. **DLG. 7**

REPORT NO.

DATE

一〇

MORNING

DAYLIGHT

EVENING

Driller					Total Men In Crew					Driller					Total Men In Crew				
FROM	TO	FORMATION	WT-BIT	R.P.M.	FROM	TO	FORMATION	WT-BIT	R.P.M.	FROM	TO	FORMATION	WT-BIT	R.P.M.	FROM	TO	FORMATION	WT-BIT	R.P.M.
0	75	S.S. with few S4 sh.			180	220	Sand + Ss. S4 sh.												
75	83	S4			280	380	Whit. S.S. + S4 sh.												
83	140	S.S. + S4 sh.			380	330	S.S. + S4												
140	180	DMP at 130'			330	400	S4												

[illegible]

REMARKS -

REMARKS

REMARKS

REMARKS -	REMARKS -	REMARKS -
10-6 Moving to new location from 2:30 till 3 PM Drilling from 3 PM till with 4 1/2		logs per 1 PM 1/2
10-7 Dr. 6:30 P.M. Hitting water. Drilling with 4 1/2 inch from 1:50 to 3:20 Pullled out of hole Run 7 1/2 PMS Run in 0:30		
10-8 Dr. 7 P.M. Running pump and hole at 1:30 PM		
10-9 Dr. 7:30 Drilling in hole. 1:00 to 3:40 P.M. to 8 PM. Drilling to new location		

SIGNED: Toolpusher

Company Supervisor

Hande