

#1 30-045-10074
#201 30-045-27062

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit SW Sec. 36 Twp 31 Rng 10

Name of Well/Wells or Pipeline Serviced ATLANTIC D COM #1, #201

cps 337w

Elevation 6627' Completion Date 6/5/63 Total Depth 300. Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. N/A

RECEIVED
MAY 31 1991

Depths gas encountered: N/A

Type & amount of coke breeze used: 2900 lbs.

OIL CON. DIV
DIST. 3

Depths anodes placed: 264', 258', 155', 149', 134', 128', 116'

Depths vent pipes placed: N/A

Vent pipe perforations: N/A

Remarks: GB #1

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

DATE 6-5-63

WELL NAME Atlantic ~~242~~ 40.1-D CPS NO. 237-W

LOCATION SW 1/4 Sec. 26 T31N R10W

WORK ORDER NUMBER 184-51542-50-02

ANODE HOLE DEPTH 200'

TOTAL DRILLING RIG TIME 11 3/4 Hrs

DRILLING TIME FOR RECTIFIER POLE HOLE 0

TYPE AND SIZE BIT USED 1 1/2 Rock - W/M (3407 x) (7778)
(152) (148)

NUMBER SACKS MUD USED 3

NUMBER SACKS LOST CIRCULATION MAT'L USED 0

ANODE DEPTHS #1 264, #2 258, #3 155, #4 149 5134 #6 128 #7 116
#8 30

TOTAL LBS. COKE USED 29 Sacks @ 100 2900 lbs

ANODE OUTPUTS 12.4 VOLTS, #1 1.0, #2 1.5, #3 1.4, #4 2.0 51.4 #6 61.6
#7 72.0 #8 2.2

TOTAL CIRCUIT RESISTANCE: VOLTS 12.0 AMPERES 6.8 OHMS 176


NUMBER FEET SURFACE CABLE ~~CONDUIT~~ 545'

DRILLING LOG (ATTACH HERETO).

FORMATION LOG (ATTACH HERETO).

REMARKS: Static 76 R 600' S

Good All Rectifier 22V 12A Ser # 62C6124

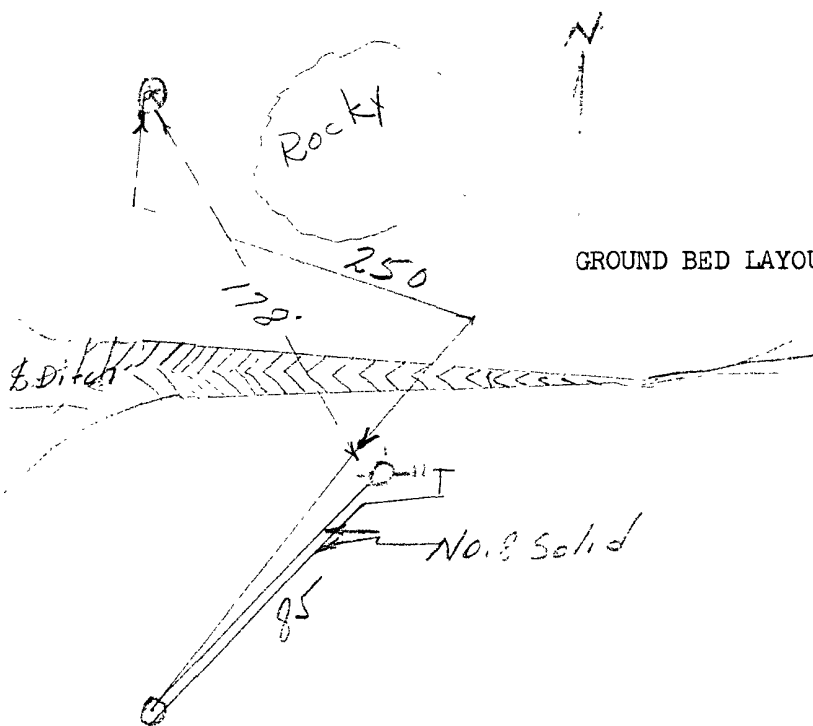

ALL CONSTRUCTION COMPLETED

Servels
SIGNATURE

GROUND BED LAYOUT SKETCH

ORIGINAL & 1 COPY
ALL REPORTS

1899

ATLANTIC STATE No 1

33702 DAILY DRILLING REPORT

LEASE 5833 FROM HOWELLE NO

CONTRACTOR E Wilson

RIG NO D-6

REPORT NO

DATE June 4 & 5 1963

MORNING

DAYLIGHT

EVENING

Driller					Total Man in Crew					Driller					Total Man in Crew				
FROM	TO	FORMATION	WT. BIT	R.P.M.	FROM	TO	FORMATION	WT. BIT	R.P.M.	FROM	TO	FORMATION	WT. BIT	R.P.M.	FROM	TO	FORMATION	WT. BIT	R.P.M.
0	35	Shale	2071		119	135	Shale	2001		200	260	Shale	2770		200	260	Shale	2770	
35	41	Shale	1		135	152	Shale	2770		260	270	Shale	2770		260	270	Shale	2770	
41	119	Sand & ss	1		152	165	Sand & ss	2770		270	300	Sand & ss	2770		270	300	Sand & ss	2770	
BIT					NO. DC					NO. DC					NO. DC				
SERIAL NO.					SIZE					SIZE					SIZE				
SIZE					STANDS					STANDS					STANDS				
TYPE					SINGLES					SINGLES					SINGLES				
MAKE					DOWN ON KELLY					DOWN ON KELLY					DOWN ON KELLY				
MUD RECORD					TOTAL DEPTH					TOTAL DEPTH					TOTAL DEPTH				
Time					MUD, ADDITIVES USED AND RECEIVED					MUD, ADDITIVES USED AND RECEIVED					MUD, ADDITIVES USED AND RECEIVED				
WT.					Vis.					WT.					Vis.				
FROM					TIME BREAKDOWN					TIME BREAKDOWN					TIME BREAKDOWN				
TO					FROM					TO					FROM				
					10 1/4 11:15														
					3 good														
					3 good water														

REMARKS -

REMARKS -

REMARKS -

June 4 - moved 11:15. STA. 11140 Drilled 300' used mud 5:00
June 5 - left Bloomf. 6:10. 6:00 finished at 8:15. Drilled 100' finished 13:00

Bit no. 24071 19040 132
7998 108

SIGNED Toolpusher

Company Supervisor

Howell