

District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410

State of New Mexico
Energy Minerals and Natural Resources

Form C-144
June 1, 2004

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

For drilling and production facilities, submit to
appropriate NMOCD District Office.
For downstream facilities, submit to Santa Fe
office

District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

Pit or Below-Grade Tank Registration or Closure

Is pit or below-grade tank covered by a "general plan"? Yes ☒ No ☐

Type of action: Registration of a pit or below-grade tank ☐ Closure of a pit or below-grade tank ☒

Operator: <u>BP AMERICA PROD. CO.</u> Telephone: <u>(505)-326-9200</u> e-mail address: _____		
Address: <u>200 ENERGY COURT, FARMINGTON, NM 87410</u>		
Facility or well name: <u>RIDDLE C LS #3</u> API #: <u>30-045- 10258</u> U/L or Qtr/Qtr <u>N</u> Sec <u>29</u> T <u>31N</u> R <u>9W</u>		
County: <u>SAN JUAN</u> Latitude <u>36.86499</u> Longitude <u>107.80735</u> NAD: 1927 <input type="checkbox"/> 1983 <input checked="" type="checkbox"/> Surface Owner Federal <input checked="" type="checkbox"/> State <input type="checkbox"/> Private <input type="checkbox"/> Indian <input type="checkbox"/>		
Pit Type: Drilling <input type="checkbox"/> Production <input type="checkbox"/> Disposal <input checked="" type="checkbox"/> <u>ABANDON</u> Workover <input type="checkbox"/> Emergency <input type="checkbox"/> Lined <input type="checkbox"/> Unlined <input checked="" type="checkbox"/> Liner type: Synthetic <input type="checkbox"/> Thickness _____ mil Clay <input type="checkbox"/> Pit Volume _____ bbl	Below-grade tank Volume: _____ bbl Type of fluid: _____ Construction material: <u>N/A</u> Double-walled, with leak detection? Yes <input type="checkbox"/> If not, explain why not. _____	RCVD APR 5 '07 OIL CONS. DIV. DIST. 3
Depth to ground water (vertical distance from bottom of pit to seasonal high water elevation of ground water.)	Less than 50 feet (20 points) 50 feet or more, but less than 100 feet (10 points) 100 feet or more (0 points)	0
Wellhead protection area: (Less than 200 feet from a private domestic water source, or less than 1000 feet from all other water sources.)	Yes (20 points) No (0 points)	0
Distance to surface water: (horizontal distance to all wetlands, playas, irrigation canals, ditches, and perennial and ephemeral watercourses.)	Less than 200 feet (20 points) 200 feet or more, but less than 1000 feet (10 points) 1000 feet or more (0 points)	0
Ranking Score (Total Points)		0

If this is a pit closure: (1) attach a diagram of the facility showing the pit's relationship to other equipment and tanks. (2) Indicate disposal location: (check the onsite box if you are burying in place) onsite ☒ offsite ☐ If offsite, name of facility _____. (3) Attach a general description of remedial action taken including remediation start date and end date. (4) Groundwater encountered: No ☒ Yes ☐ If yes, show depth below ground surface _____ ft. and attach sample results. (5) Attach soil sample results and a diagram of sample locations and excavations.

Additional Comments	<u>PIT LOCATED APPROXIMATELY 117 FT. N15E FROM WELL HEAD.</u>
<u>PIT EXCAVATION: WIDTH N/A ft., LENGTH N/A ft., DEPTH N/A ft.</u>	
<u>PIT REMEDIATION: CLOSE AS IS: <input checked="" type="checkbox"/> LANDFARM: <input type="checkbox"/> COMPOST: <input type="checkbox"/> STOCKPILE: <input type="checkbox"/> OTHER <input type="checkbox"/> (explain)</u>	
Cubic yards:	<u>N/A</u>

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that the above-described pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines ☒, a general permit ☐, or an alternative OCD-approved plan ☒.

Date: 02/20/06

Printed Name/Title Jeff Blagg - P.E. # 11607 Signature Jeff Blagg

Your certification and NMOCD approval of this application/closure does not relieve the operator of liability should the contents of the pit or tank contaminate ground water or otherwise endanger public health or the environment. Nor does it relieve the operator of its responsibility for compliance with any other federal, state, or local laws and/or regulations.

Approval: Deputy Oil & Gas Inspector,
District #3
Printed Name/Title _____ Signature Bob Allen Date: AUG 03 2007

30-045-10258

36.86499 x 107.80735

CLIENT: BP
BLAGG ENGINEERING, INC.
P.O. BOX 87, BLOOMFIELD, NM 87413
(505) 632-1199
LOCATION NO: 80815COCR NO: 15564**FIELD REPORT: PIT CLOSURE VERIFICATION**PAGE No: 1 of 1LOCATION: NAME: RIDDLE C L5 WELL #: 3 TYPE: ABANDONQUAD/UNIT N SEC: 29 TWP: 31N RNG: 9W PM: NM CNTY: SJ ST: NMQTR/FOOTAGE: 990 FSL x 1574 FWL SE/SW CONTRACTOR: PXS (TRENNE)DATE STARTED 2-17-06DATE FINISHED 2-17-06ENVIRONMENTAL SPECIALIST: JCBEXCAVATION APPROX. NA FT. x NA FT. x NA FT. DEEP. CUBIC YARDAGE: 0DISPOSAL FACILITY: NA REMEDIATION METHOD: CLOSE AS ISLAND USE: RANGE - BLM LEASE: NM073216 FORMATION: MV**FIELD NOTES & REMARKS:**PIT LOCATED APPROXIMATELY 117 FT. NISE FROM WELLHEAD.DEPTH TO GROUNDWATER: 2100 NEAREST WATER SOURCE: 21000 NEAREST SURFACE WATER 2100NMOC D RANKING SCORE: 0 NMOC D TPH CLOSURE STD: 5000 PPM**SOIL AND EXCAVATION DESCRIPTION:**
OVM CALIB. READ = 51.9 ppm
OVM CALIB. GAS = 100 ppm RF = 0.52
TIME: 0845 am/pm DATE: 2/17
SOIL TYPE: (SAND / SILTY SAND) / SILT / SILTY CLAY / CLAY / GRAVEL / OTHERSOIL COLOR Light tanCOHESION (ALL OTHERS): (NON COHESIVE) / SLIGHTLY COHESIVE / COHESIVE / HIGHLY COHESIVECONSISTENCY (NON COHESIVE SOILS): (LOOSE) / FIRM / DENSE / VERY DENSE

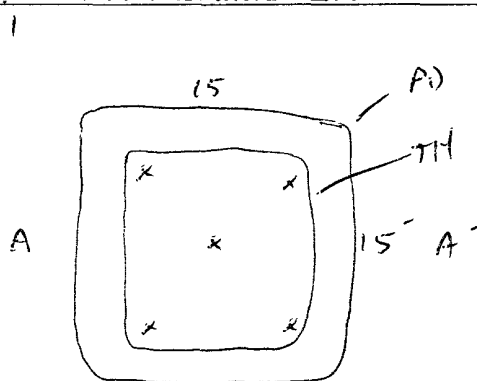
PLASTICITY (CLAYS) NON PLASTIC / SLIGHTLY PLASTIC / COHESIVE / MEDIUM PLASTIC / HIGHLY PLASTIC

DENSITY (COHESIVE CLAYS & SILTS): SOFT / FIRM / STIFF / VERY STIFF / HARD

MOISTURE (DRY / SLIGHTLY MOIST) / MOIST / WET / SATURATED / SUPER SATURATEDDISCOLORATION/STAINING OBSERVED: (YES) / NO EXPLANATION - V. MINORHC ODOR DETECTED: (YES) / NO EXPLANATION - V. MINORSAMPLE TYPE GRAB / (COMPOSITE) # OF PTS. 5ADDITIONAL COMMENTS: 15' x 15' x 3' Deep ABANDON EARTHEN PIT. Use
Backhoe to dig into pit & sample.CLOSED**SCALE**

0 FT

N

PIT PERIMETER**FIELD 418.1 CALCULATIONS**

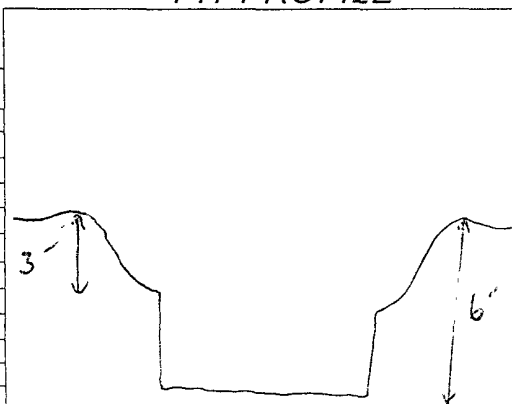
SAMP. TIME	SAMP. ID	LAB NO.	WEIGHT (g)	mL FREON	DILUTION	READING	CALC. (ppm)

OVM READING

SAMPLE ID	FIELD HEADSPACE (ppm)
1 @	
2 @	
3 @	
4 @	
5 @	
S-Pout	114
Composite	
2 @	

LAB SAMPLES

SAMPLE ID	ANALYSIS	TIME
S-Pout	TPH	0830
	BTEX	
	CL-	
	<u>PASSED</u>	

PIT PROFILE
P.D = PIT DEPRESSION; B.G = BELOW GRADE; B = BELOW
T.H = TEST HOLE; ~ = APPROX.; T.B = TANK BOTTOM

TRAVEL NOTES:

CALLOUT: _____

ONSITE: 2/17/06

ENVIROTECH LABS

PRACTICAL SOLUTIONS FOR A BETTER TOMORROW

EPA METHOD 8015 Modified Nonhalogenated Volatile Organics Total Petroleum Hydrocarbons


Client:	Blagg / BP	Project #:	94034-010
Sample ID:	5-Point Composite @ 6'	Date Reported:	02-20-06
Laboratory Number:	36268	Date Sampled:	02-17-06
Chain of Custody No:	15564	Date Received:	02-17-06
Sample Matrix:	Soil	Date Extracted:	02-18-06
Preservative:	Cool	Date Analyzed:	02-20-06
Condition:	Cool and Intact	Analysis Requested:	8015 TPH


Parameter	Concentration (mg/Kg)	Det. Limit (mg/Kg)
Gasoline Range (C5 - C10)	ND	0.2
Diesel Range (C10 - C28)	ND	0.1
Total Petroleum Hydrocarbons	ND	0.2

ND - Parameter not detected at the stated detection limit.

References: Method 8015B, Nonhalogenated Volatile Organics, Test Methods for Evaluating Solid Waste, SW-846, USEPA, December 1996.

Comments: **Riddle C LS 3 Abandon Pit.**


Analyst


Review

ENVIROTECH LABS

PRACTICAL SOLUTIONS FOR A BETTER TOMORROW

EPA METHOD 8021 AROMATIC VOLATILE ORGANICS

Client:	Blagg / BP	Project #:	94034-010
Sample ID:	5-Point Composite @ 6'	Date Reported:	02-20-06
Laboratory Number:	36268	Date Sampled:	02-17-06
Chain of Custody:	15564	Date Received:	02-17-06
Sample Matrix:	Soil	Date Analyzed:	02-20-06
Preservative:	Cool	Date Extracted:	02-18-06
Condition:	Cool & Intact	Analysis Requested:	BTEX

Parameter	Concentration (ug/Kg)	Det. Limit (ug/Kg)
Benzene	ND	1.8
Toluene	2.4	1.7
Ethylbenzene	6.1	1.5
p,m-Xylene	22.5	2.2
o-Xylene	7.8	1.0
Total BTEX	38.8	


ND - Parameter not detected at the stated detection limit.

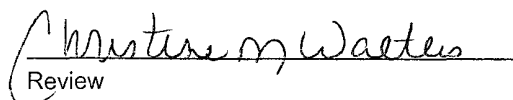
Surrogate Recoveries:	Parameter	Percent Recovery
	Fluorobenzene	98.0 %
	1,4-difluorobenzene	98.0 %
	Bromochlorobenzene	98.0 %

References: Method 5030B, Purge-and-Trap, Test Methods for Evaluating Solid Waste, SW-846, USEPA, December 1996.

Method 8021B, Aromatic Volatile Organics, Test Methods for Evaluating Solid Waste, SW-846, USEPA, December 1996.

Comments: Riddle C LS 3 Abandon Pit.


Analyst


Review

ENVIROTECH LABS

PRACTICAL SOLUTIONS FOR A BETTER TOMORROW

Chloride

Client:	Blagg / BP	Project #:	94034-010
Sample ID:	5-Point Composite @ 6'	Date Reported:	02-20-06
Lab ID#:	36268	Date Sampled:	02-17-06
Sample Matrix:	Soil	Date Received:	02-17-06
Preservative:	Cool	Date Analyzed:	02-20-06
Condition:	Cool and Intact	Chain of Custody:	15564

Parameter	Concentration (mg/Kg)
-----------	-----------------------

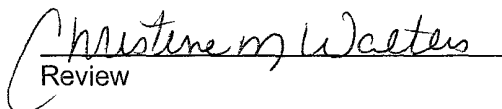
Total Chloride

4.2

Reference: Standard Methods For The Examination of Water And Waste Water", 18th ed., 1992.

Comments: Riddle C LS 3 Abandon Pit.


Analyst


Review

15564

san juan reproduction 578-129

ENVIROTECH LABS

PRACTICAL SOLUTIONS FOR A BETTER TOMORROW

EPA Method 8015 Modified Nonhalogenated Volatile Organics Total Petroleum Hydrocarbons

Quality Assurance Report

Client:	QA/QC	Project #:	N/A
Sample ID:	02-20-06 QA/QC	Date Reported:	02-20-06
Laboratory Number:	36264	Date Sampled:	N/A
Sample Matrix:	Methylene Chloride	Date Received:	N/A
Preservative:	N/A	Date Analyzed:	02-20-06
Condition:	N/A	Analysis Requested:	TPH

	I-Cal Date	I-Cal RF	C-Cal RF	% Difference	Accept Range
Gasoline Range C5 - C10	02-04-05	1.0083E+003	1.0093E+003	0.10%	0 - 15%
Diesel Range C10 - C28	02-04-05	1.0020E+003	1.0040E+003	0.20%	0 - 15%

Blank Conc. (mg/L - mg/Kg)	Concentration	Detection Limit
Gasoline Range C5 - C10	ND	0.2
Diesel Range C10 - C28	ND	0.1
Total Petroleum Hydrocarbons	ND	0.2

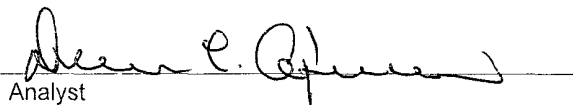
Duplicate Conc. (mg/Kg)	Sample	Duplicate	% Difference	Accept Range
Gasoline Range C5 - C10	353	356	0.8%	0 - 30%
Diesel Range C10 - C28	771	773	0.2%	0 - 30%


Spike Conc. (mg/Kg)	Sample	Spike Added	Spike Result	% Recovery	Accept Range
Gasoline Range C5 - C10	353	250	603	99.9%	75 - 125%
Diesel Range C10 - C28	771	250	1,020	99.9%	75 - 125%

ND - Parameter not detected at the stated detection limit.

References: Method 8015B, Nonhalogenated Volatile Organics, Test Methods for Evaluating Solid Waste, SW-846, USEPA, December 1996.

Comments: QA/QC for Samples 36264 - 36273.


Analyst


Review

ENVIROTECH LABS

PRACTICAL SOLUTIONS FOR A BETTER TOMORROW

EPA METHOD 8021 AROMATIC VOLATILE ORGANICS

Client:	N/A	Project #:	N/A
Sample ID:	02-20-BTEX QA/QC	Date Reported:	02-20-06
Laboratory Number:	36264	Date Sampled:	N/A
Sample Matrix:	Soil	Date Received:	N/A
Preservative:	N/A	Date Analyzed:	02-20-06
Condition:	N/A	Analysis:	BTEX

Calibration and Detection Limits (ug/L)	I-Cal RF	C-Cal RF	%Diff	Blank Conc	Detect Limit
		Accept. Range 0 - 15%			
Benzene	3.6470E+006	3.6543E+006	0.2%	ND	0.2
Toluene	8.6272E+007	8.6444E+007	0.2%	ND	0.2
Ethylbenzene	7.5482E+007	7.5634E+007	0.2%	ND	0.2
p,m-Xylene	1.6427E+008	1.6460E+008	0.2%	ND	0.2
o-Xylene	8.3597E+007	8.3765E+007	0.2%	ND	0.1


Duplicate Conc. (ug/Kg)	Sample	Duplicate	%Diff.	Accept Range	Detect. Limit
Benzene	421	420	0.2%	0 - 30%	1.8
Toluene	171	170	0.5%	0 - 30%	1.7
Ethylbenzene	297	296	0.3%	0 - 30%	1.5
p,m-Xylene	4,090	4,080	0.2%	0 - 30%	2.2
o-Xylene	539	538	0.2%	0 - 30%	1.0


Spike Conc. (ug/Kg)	Sample	Amount Spiked	Spiked Sample	% Recovery	Accept Range
Benzene	421	50.0	471	99.8%	39 - 150
Toluene	171	50.0	220	99.9%	46 - 148
Ethylbenzene	297	50.0	346	99.8%	32 - 160
p,m-Xylene	4,090	100	4,180	99.8%	46 - 148
o-Xylene	539	50.0	588	99.8%	46 - 148

ND - Parameter not detected at the stated detection limit.

References: Method 5030B, Purge-and-Trap, Test Methods for Evaluating Solid Waste, SW-846, USEPA, December 1996.
Method 8021B, Aromatic and Halogenated Volatiles by Gas Chromatography Using Photoionization and/or Electrolytic Conductivity Detectors, SW-846, USEPA December 1996

Comments: QA/QC for Samples 36264 - 36272.


Analyst


Review