

District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy Minerals and Natural Resources
Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-144
March 12, 2004

For drilling and production facilities, submit to appropriate NMOCD District Office.
For downstream facilities, submit to Santa Fe office

Pit or Below-Grade Tank Registration or Closure

Is pit or below-grade tank covered by a "general plan"? Yes ☒ No ☐

Type of action: Registration of a pit or below-grade tank ☐ Closure of a pit or below-grade tank ☒

RCVD APR10'07
OIL CONS. DIV.

DIST. 3

Operator: BP AMERICA PROD. CO. Telephone: (505) 326-9200
Address: 200 Energy Court, Farmington, NM 87410
Facility or well name: WILCH A #4E API #: 30-045-25248 U/L or Qtr/Qt L Sec 25 T 29N R 8W
County: San Juan Latitude 36.69382 Longitude 107.63433 NAD: 1927 ☐ 1983 ☒ Surface Owner Federal ☒ State ☐ Private ☐ Indian ☐

Pit

Type: Drilling ☐ Production ☒ Disposal ☐ BLOW

Workover ☐ Emergency ☐

Lined ☐ Unlined ☒

Liner type: Synthetic ☐ Thickness mil Clay ☐ Volume bbl

Below-grade tank

Volume: bbl Type of fluid:

Construction material: N/A

Double-walled with leak detection? Yes ☒ If not, explain why not

Depth to ground water (vertical distance from bottom of pit to seasonal high water elevation of ground water.)

Less than 50 feet

(20 points)

50 feet or more, but less than 100 feet

(10 points)

0

100 feet or more

(0 points)

Wellhead protection area: (Less than 200 feet from a private domestic water source, or less than 1000 feet from all other water sources.)

Yes

(20 points)

No

(0 points)

0

Distance to surface water: (horizontal distance to all wetlands, playas, irrigation canals, ditches, and perennial and ephemeral watercourses.)

Less than 200 feet

(20 points)

200 feet or more, but less than 1000 feet

(10 points)

0

1000 feet or more

(0 points)

Ranking Score (Total Points)

0

If this is a pit closure: (1) attach a diagram of the facility showing the pit's relationship to other equipment and tanks. (2) Indicate disposal location:

onsite ☒ offsite ☐ If offsite, name of facility . (3) Attach a general description of remedial action taken including remediation start date and end date. (4) Groundwater encountered: No ☒ Yes ☐ If yes, show depth below ground surface ft. and attach sample results (5) Attach soil sample results and a diagram of sample locations and excavations.

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that the above-described pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines ☒, a general permit ☐, or an (attached) alternative OCD-approved plan ☒.

Date: 06/12/04

Printed Name/Title Jeff Blagg - P.E. # 11607

Signature Jeff Blagg

Your certification and NMOCD approval of this application/closure does not relieve the operator of liability should the contents of the pit or tank contaminate ground water or otherwise endanger public health or the environment. Nor does it relieve the operator of its responsibility for compliance with any other federal, state, or local laws and/or regulations.

Approval:

AUG 09 2007

Date:
Deputy Oil & Gas Inspector,

Printed Name/Title District #3

Signature Bd. Duff

3004525248

CLIENT: BP
BLAGG ENGINEERING, INC.
P.O. BOX 87, BLOOMFIELD, NM 87413
(505) 632-1199
LOCATION NO. 81341COCR NO. 11664**FIELD REPORT: PIT CLOSURE VERIFICATION**PAGE No: 1 of 1LOCATION: NAME WILCH A WELL# 4E TYPE: BLOWDATE STARTED 2/23/04QUAD/UNIT: L SEC 25 TWP 29N RNG 8W PM: NM CNTY. SJ ST NM

DATE FINISHED

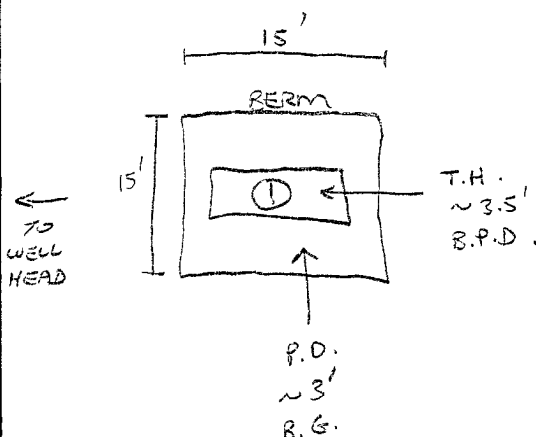
QTR/FOOTAGE: 1550'S/813'W NW/4SW CONTRACTOR: L & L (BRIAN)ENVIRONMENTAL SPECIALIST: NVEXCAVATION APPROX. NA FT. X NA FT. X NA FT. DEEP. CUBIC YARDAGE: NADISPOSAL FACILITY: ON-SITE REMEDIATION METHOD: CLOSE AS ISLAND USE: RANGE - BLM LEASE: SE078416A FORMATION: DKFIELD NOTES & REMARKS: PIT LOCATED APPROXIMATELY 150 FT. N76E FROM WELLHEAD.DEPTH TO GROUNDWATER >100' NEAREST WATER SOURCE: >1000' NEAREST SURFACE WATER >1000'NMOCD RANKING SCORE 0 NMOCD TPH CLOSURE STD 5000 PPM**SOIL AND EXCAVATION DESCRIPTION:**
OVM CALIB READ. = 51.9 ppm
OVM CALIB. GAS = 100 ppm RF = 0.52
TIME: 10:10 am/pm DATE: 2/20/04

SOIL TYPE SAND / SILTY SAND / SILT / SILTY CLAY / CLAY / GRAVEL / OTHER BEDROCK (SHALE)
SOIL COLOR MOD. BROWN TO MED. GRAY BEDROCK - LT. GRAY / DUSKY RED
COHESION (ALL OTHERS) NON COHESIVE / SLIGHTLY COHESIVE / COHESIVE / HIGHLY COHESIVECONSISTENCY (NON COHESIVE SOILS) LOOSE / FIRM / DENSE / VERY DENSEPLASTICITY (CLAYS) NON PLASTIC / SLIGHTLY PLASTIC / COHESIVE / MEDIUM PLASTIC / HIGHLY PLASTICDENSITY (COHESIVE CLAYS & SILTS) SOFT / FIRM / VERY STIFF / HARDMOISTURE DRY / SLIGHTLY MOIST / MOIST / WET / SATURATED / SUPER SATURATEDDISCOLORATION/STAINING OBSERVED YES / NO EXPLANATION - MED. GRAY BET. 4'-6.5' BELOW GRADEHC ODOR DETECTED: YES / NO EXPLANATION - TEST HOLE + OVM SAMPLESAMPLE TYPE GRAB / COMPOSITE - # OF PTS 1
ADDITIONAL COMMENTS COLLECTED SAMPLE FROM BEDROCK SURFACE. BEDROCK - SOFT TO HARD, FRIABLE.
SOIL MOISTURE SATURATED FROM RECENT PRECIPITATION.
CLOSED**SCALE**

0 FT

FIELD 418.1 CALCULATIONS

SAMP. TIME	SAMP. ID	LAB NO.	WEIGHT (g)	mL FREON	DILUTION	READING	CALC. (ppm)

PIT PERIMETERAN**PIT PROFILE****OVM READING**

SAMPLE ID	FIELD HEADSPACE (ppm)
1 @ 6.5'	795
2 @	
3 @	
4 @	
5 @	

NOT APPLICABLE

LAB SAMPLES

SAMPLE ID	ANALYSIS	TIME
1 @ 6.5' TPH (90138)		1323
1 @ 6.5' BTEX (90213)		"

BOTH PASSED
P.D. = PIT DEPRESSION, B.G. = BELOW GRADE; B = BELOW
T.H. = TEST HOLE, ~ = APPROX.; T.B. = TANK BOTTOM
TRAVEL NOTES:CALLOUT: 2/20/04 - MORN. ONSITE: 2/23/04 - AFTER. (SCHEDULED)

ENVIROTECH LABS

PRACTICAL SOLUTIONS FOR A BETTER TOMORROW

EPA METHOD 8015 Modified Nonhalogenated Volatile Organics Total Petroleum Hydrocarbons


Client:	Blagg / BP	Project #:	94034-010
Sample ID:	1 @ 6.5'	Date Reported:	02-24-04
Laboratory Number:	27917	Date Sampled:	02-23-04
Chain of Custody No:	11664	Date Received:	02-24-04
Sample Matrix:	Soil	Date Extracted:	02-24-04
Preservative:	Cool	Date Analyzed:	02-24-04
Condition:	Cool and Intact	Analysis Requested:	8015 TPH


Parameter	Concentration (mg/Kg)	Det. Limit (mg/Kg)
Gasoline Range (C5 - C10)	520	0.2
Diesel Range (C10 - C28)	70.2	0.1
Total Petroleum Hydrocarbons	590	0.2

ND - Parameter not detected at the stated detection limit.

References: Method 8015B, Nonhalogenated Volatile Organics, Test Methods for Evaluating Solid Waste, SW-846, USEPA, December 1996.

Comments: **Wilch A #4E Blow Pit Grab Sample.**


Analyst


Review

ENVIROTECH LABS

PRACTICAL SOLUTIONS FOR A BETTER TOMORROW

EPA METHOD 8021 AROMATIC VOLATILE ORGANICS

Client:	Blagg / BP	Project #:	94034-010
Sample ID:	1 @ 6.5'	Date Reported:	02-24-04
Laboratory Number:	27917	Date Sampled:	02-23-04
Chain of Custody:	11664	Date Received:	02-24-04
Sample Matrix:	Soil	Date Analyzed:	02-24-04
Preservative:	Cool	Date Extracted:	02-24-04
Condition:	Cool & Intact	Analysis Requested:	BTEX

Parameter	Concentration (ug/Kg)	Det. Limit (ug/Kg)
Benzene	123	1.8
Toluene	448	1.7
Ethylbenzene	326	1.5
p,m-Xylene	1,230	2.2
o-Xylene	1,070	1.0
Total BTEX	3,200	

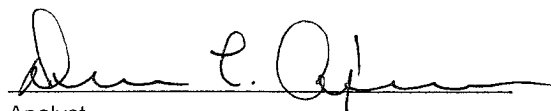
ND - Parameter not detected at the stated detection limit.

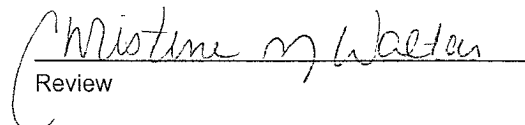
Surrogate Recoveries:	Parameter	Percent Recovery
	Fluorobenzene	99 %
	1,4-difluorobenzene	99 %
	Bromochlorobenzene	99 %

References: Method 5030B, Purge-and-Trap, Test Methods for Evaluating Solid Waste, SW-846, USEPA, December 1996.

Method 8021B, Aromatic Volatile Organics, Test Methods for Evaluating Solid Waste, SW-846, USEPA, December 1996.

Comments: Wilch A #4E Blow Pit Grab Sample.


Analyst


Review