

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to re-enter an
Abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE – Other instructions on reverse side

1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other		5. Lease Serial No. SF – 078385
2. Name of Operator BP America Production Company Attn: Mary Corley		6. If Indian, Allottee or tribe Name
3a. Address P.O. Box 3092 Houston, TX 77253		7. If Unit or CA/Agreement, Name and/or No.
3b. Phone No. (include area code) 281-366-4491		8. Well Name and No. Florance K 29B
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) 770' FNL & 680' FWL Sec. 25 T30N, R08W Unit D		9. API Well No. 30-045-31781
		10. Field and Pool, or Exploratory Area Blanco Mesaverde
		11. County or Parish, State San Juan County, New Mexico

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OR NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Water shut-Off
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Reclamation
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Recomplete
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal
			Other <u>Exception to</u>
			WOC time of 6 hrs.

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

BP is currently using 3% CaCl₂ in our slurry and achieves 300 psi compressive strength after 1 hr 50 min and 500 psi after 3 hrs 8 min. We, therefore, request approval to initiate blowout preventer (BOP) nipple up operations after a 2 hour wait on cement time in lieu of the 6 hour time frame required by rule to achieve 300 psi compressive strength with Class B cement slurry at 80 deg F.

3% CaCl₂ will be used, NOT 2% as originally approved.

14. I hereby certify that the foregoing is true and correct
Name (Printed/typed)

Mary Corley

Title Senior Regulatory Analyst

Signature

Date 10/02/2003

Per Harold Jordan 10/8/03

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

/s/ Jim Lovato

Title

Date

OCT - 9 2003

Conditions of approval, if any, are attached. Approval of this notice does not warrant or Certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

comply with nmocd


NMOCD Rule 107G

CP

CemCADE*

Client : bp
Well : Surface Job (80F)
String : 15.8 ppg G + 3% S001
District :
Country : USA

3S1_80°.cfw 08-22-2003 LoadCase Untitled Version wcs-cem431_19

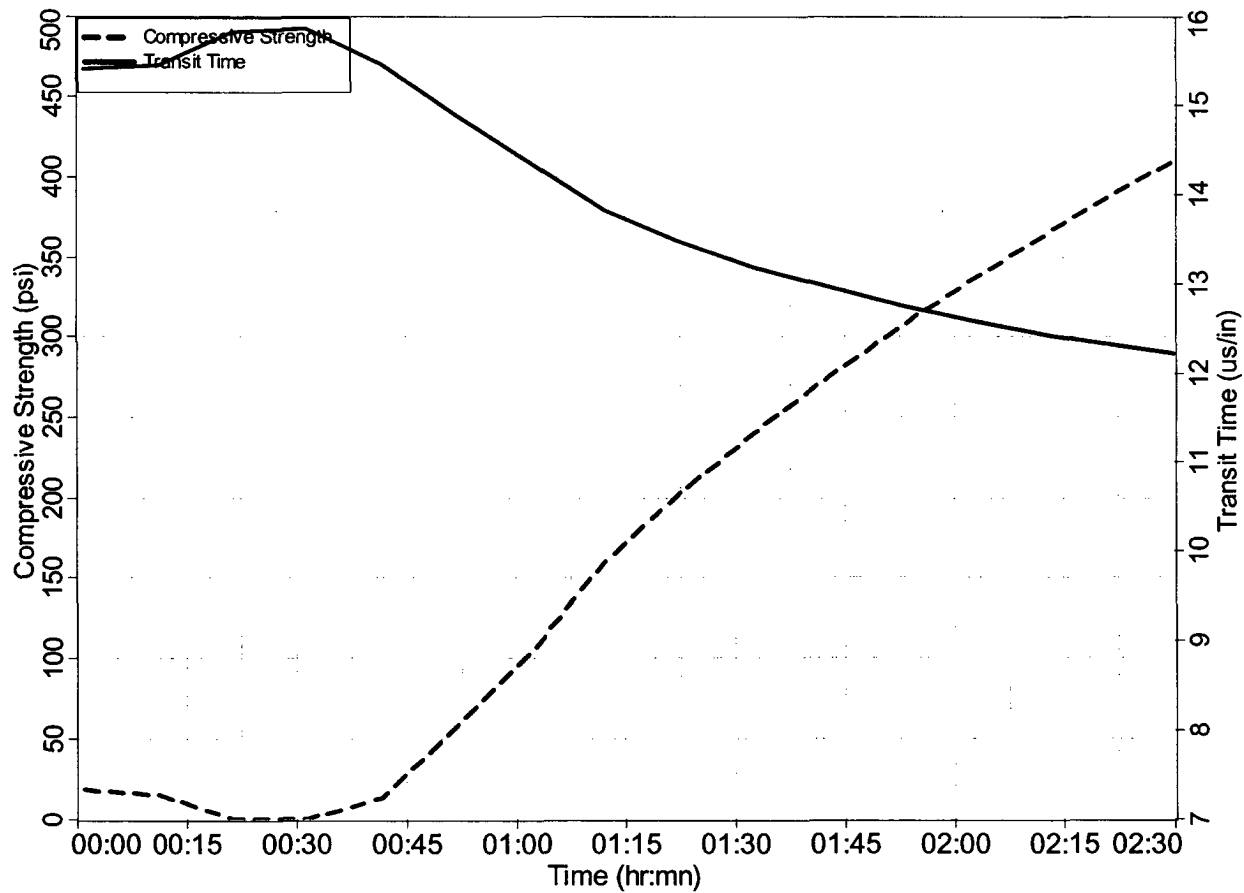

Lead Slurry Density = 15.80 lb/gal Time to 500 psi= 03:08 hr:mn Time to 1000 psi= 08:02 hr:mn

*Mark of Schlumberger

Schlumberger