District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy Minerals and Natural Resources

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-144
June 1, 2004

For drilling and production facilities, submit to appropriate NMOCD District Office.
For downstream facilities, submit to Santa Fe office

Pit or Below-Grade Tank Registration or Closure

Is pit or below-grade tank covered by a "general plan"? Yes ☒ No ☐
Type of action: Registration of a pit or below-grade tank ☐ Closure of a pit or below-grade tank ☒

Operator: Kimbell Oil Company of Texas Telephone: (817) 335-2593 ext. 30 e-mail address jms@kimbelloil.com
Address: 777 Taylor Street, Suite P-IIA, Fort Worth, Texas 76102
Facility or well name: Jicarilla #00 1 / Meter House API #: 30-039-05904 U/L or Qtr/Qtr M Sec 20 T 25N R 5W
County: Rio Arriba Latitude 36.381108 Longitude -107.38906 NAD 1927 ☒ 1983 ☐
Surface Owner: Federal ☐ State ☐ Private ☐ Indian ☒

RCVD DEC 6 '07
OIL CONS. DIV.
DIST. 3

Pit	**Below-grade tank**		
Type Drilling ☐ Production ☐ Disposal ☒ Workover ☐ Emergency ☐ Lined ☐ Unlined ☒ Liner type: Synthetic ☐ Thickness _____mil Clay ☐ Pit Volume _____bbl	Volume: ___bbl Type of fluid: Construction material: Double-walled, with leak detection? Yes ☐ If not, explain why not		
Depth to ground water (vertical distance from bottom of pit to seasonal high water elevation of ground water.)	Less than 50 feet 50 feet or more, but less than 100 feet 100 feet or more	(20 points) (10 points) (0 points)	0
Wellhead protection area: (Less than 200 feet from a private domestic water source, or less than 1000 feet from all other water sources.)	Yes No	(20 points) (0 points)	0
Distance to surface water: (horizontal distance to all wetlands, playas, irrigation canals, ditches, and perennial and ephemeral watercourses.)	Less than 200 feet 200 feet or more, but less than 1000 feet 1000 feet or more	(20 points) (10 points) (0 points)	10
	Ranking Score (Total Points)		10

If this is a pit closure: (1) Attach a diagram of the facility showing the pit's relationship to other equipment and tanks. (2) Indicate disposal location: (check the onsite box if your are burying in place) onsite ☐ offsite ☐ If offsite, name of facility ___. (3) Attach a general description of remedial action taken including remediation start date and end date. (4) Groundwater encountered: No ☒ Yes ☐ If yes, show depth below ground surface_____ft. and attach sample results.
(5) Attach soil sample results and a diagram of sample locations and excavations.

Additional Comments:
Soil passed 418.1 standard of 1000 ppm for TPH and 100 ppm for OVM No excavation needed

I hereby certify that the information above is true and complete to the best of my knowledge and belief. **I further certify that the above-described pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines ☐, a general permit ☐, or an (attached) alternative OCD-approved plan ☐.**

Date: 12-3-07
Printed Name/Title Mr. Jonathan Stickland, Engineer Signature

Your certification and NMOCD approval of this application/closure does not relieve the operator of liability should the contents of the pit or tank contaminate ground water or otherwise endanger public health or the environment. Nor does it relieve the operator of its responsibility for compliance with any other federal, state, or local laws and/or regulations.

Approval:
Printed Name/Title DEPUTY OIL & GAS INSPECTOR, DIST. #3 Signature Date. JAN 04 2008

CLIENT: Kimbell Oil

ENVIROTECH INC.

ENVIRONMENTAL SCIENTISTS & ENGINEERS
5796 U.S HIGHWAY 64-3014
FARMINGTON, NEW MEXICO 87401
PHONE: (505) 632-0615

LOCATION NO: _____
C.O.C. NO: _____

FIELD REPORT: CLOSURE VERIFICATION

PAGE No: 1 of 1

LOCATION: NAME: Jicarilla WELL #: 1 PIT: MH
QUAD/UNIT: M SEC: 25 TWP: 25N RNG: 5W PM: NMPM CNTY: RA ST: NM
QTR/FOOTAGE: CONTRACTOR: Envirotech

DATE STARTED: 11/6/07
DATE FINISHED: 11/6/07
ENVIRONMENTAL SPECIALIST: GWC

EXCAVATION APPROX. 0 FT. x 0 FT. x 0 FT. DEEP CUBIC YARDAGE: 0
DISPOSAL FACILITY: N/A REMEDIATION METHOD: ~~Landfarm~~ N/A
LAND USE: _____ LEASE: _____ FORMATION: _____

FIELD NOTES & REMARKS: PIT LOCATED APPROXIMATELY 18' FT. 30° FROM WELLHEAD.
DEPTH TO GROUNDWATER: >100 NEAREST WATER SOURCE: >1000 NEAREST SURFACE WATER: 200-1000
NMOCD RANKING SCORE: 10 NMOCD TPH CLOSURE STD: 1,000 PPM

CHECK ONE:
X PIT ABANDONED
___ STEEL TANK INSTALLED

SOIL AND EXCAVATION DESCRIPTION:

Soil tested clean, no remediation

FIELD 418.1 CALCULATIONS

TIME	SAMPLE I.D	LAB No	WEIGHT (g)	mL. FREON	DILUTION	READING	CALC ppm
1305	200 STD				1	174	
	3' below Ground surface				4	44	176

SCALE
0 FT

PIT PERIMETER

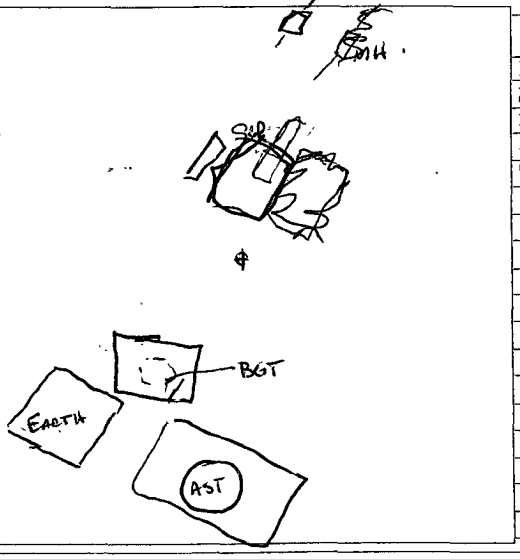

OVM RESULTS

SAMPLE ID	FIELD HEADSPACE PID (ppm)
1 bottom 3'	0.4
2	
3	
4	
5	

LAB SAMPLES

SAMPLE ID	ANALYSIS	TIME

PIT PROFILE

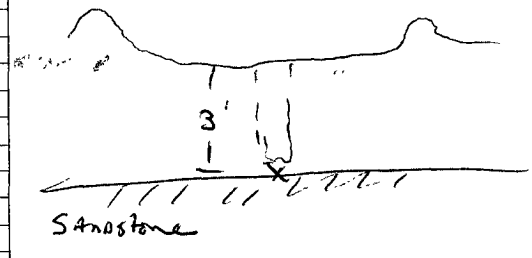

TRAVEL NOTES: CALLOUT: _____ ONSITE: _____

ENVIROTECH INC.

PRACTICAL SOLUTIONS FOR A BETTER TOMORROW

EPA METHOD 418.1
TOTAL PETROLEUM HYDROCARBONS

Client:	Kimbell Oil Company of Texas	Project #:	06011-004
Sample No.:	1	Date Reported:	11/14/2007
Sample ID:	Discrete, 3' BGS	Date Sampled:	11/6/2007
Sample Matrix:	Soil	Date Analyzed:	11/6/2007
Preservative:	Cool	Analysis Needed:	TPH-418.1
Condition:	Cool and Intact		

Parameter	Concentration (mg/kg)	Det. Limit (mg/kg)
Total Petroleum Hydrocarbons	**176**	**5.0**

ND = Parameter not detected at the stated detection limit.

References: Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis of Water and Waste, USEPA Storet No. 4551, 1978.

Comments: **Jicarilla #1 / Meter House**

Instrument callibrated to 200 ppm standard. Zeroed before each sample

Analyst

Greg Crabtree
Printed

Review

Nicole Hayworth
Printed

5796 U.S. Highway 64 • Farmington, NM 87401 • Tel 505 • 632 • 0615 • Fax 505 • 632 • 1865

ENVIROTECH INC.

PRACTICAL SOLUTIONS FOR A BETTER TOMORROW

CONTINUOUS CALIBRATION
EPA METHOD 418.1
TOTAL PETROLEUM
HYDROCARBONS

Cal. Date: 6-Nov-07

Parameter	Standard Concentration mg/L	Concentration Reading mg/L
TPH	100	
	200	174
	500	
	1000	

The accepted percent relative deviation (%RSD) of the calibration factor is less than 20% over the working range.

Analyst

11/4/07
Date

Greg Crabtree
Printed

Review

11/14/07
Date

Nicole Hayworth
Printed

5796 U.S. Highway 64 • Farmington, NM 87401 • Tel 505 • 632 • 0615 • Fax 505 • 632 • 1865