

SN-26

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS

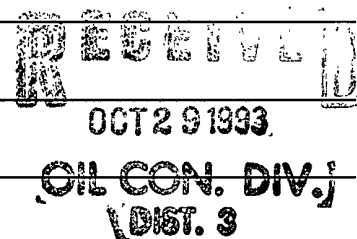
NORTHWESTERN NEW MEXICO

(Submit 3 Copies to OCD Aztec Office)

30-039-21409

Operator: BLACKWOOD & NICHOLS CO. Location: Unit O, Sec. 36, Twp 31N, Rng 7W.Name of Well/Wells or Pipeline Serviced NEBU 22AElevation 6300' Completion Date 6-10-93 Total Depth 255' Land Type* Surface: S Mineral: E-505-6Casing, Sizes, Types & Depths 8-5/8" SCH 40 P.V.C. - 100'If Casing is cemented, show amounts & types used 20 sks Portland Zia I-IIIf Cement or Bentonite Plugs have been placed, show depths & amounts used N/A

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. Fresh, 110' (trace) no sample takenDepths gas encountered: N/AType & amount of coke breeze used: Asbury, (4518) Flo-Coke - 3,000#Depths anodes placed: 245' to 155' - 10 anodesDepths vent pipes placed: Bottom to 4' above ground levelVent pipe perforations: 255' to 110'Remarks: H₂O used from La Jara watering hole (fresh).

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.

If Federal or Indian, add Lease Number.

Signed by: James K. AllenTitle: Operations EngineerDate: 10/14/93

BLACKWOOD & NICHOLS
CATHODIC GROUND BED
DRILLERS REPORT

CP# SN-26 WELL# NEBU #22A

6/10/93
O S 36 T 31N R 7W

[illegible]

DRILLER

INSPECTOR Max D. McFarland