

30-039-07861

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit NE Sec. 15 Twp 30 Rng 7

Name of Well/Wells or Pipeline Serviced SAN JUAN 30-6 UNIT #83

cps 151w

Elevation 6203' Completion Date 4/5/63 Total Depth 200' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. N/A

Depths gas encountered: N/A

Type & amount of coke breeze used: 1360 lbs.

Depths anodes placed: 180', 174', 70', 64', 58', 52'

Depths vent pipes placed: N/A

Vent pipe perforations: N/A

Remarks: gb #1

RECEIVED
MAY 31 1991
OIL CON. DIST. 3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

DATE 4-5-63

WELL NAME Peters #1

CPS NO. 151 W

LOCATION 15-30N-7W

WORK ORDER NUMBER 184-40542-50-02

ANODE HOLE DEPTH 200'

TOTAL DRILLING RIG TIME 9 hrs

DRILLING TIME FOR RECTIFIER POLE HOLE _____

TYPE AND SIZE BIT USED _____

NUMBER SACKS MUD USED 0

NUMBER SACKS LOST CIRCULATION MAT'L USED 0

ANODE DEPTHS #1 180', #2 174', #3 70, #4 64 558' 6.52'

TOTAL LBS. COKE USED 1360 165

ANODE OUTPUTS 12 VOLTS, #1 2.5, #2 2.6, #3 2.8, #4 3.2 53.06.2.5

TOTAL CIRCUIT RESISTANCE: VOLTS 11.4 AMPERES 6.5 OHMS 1.76-2

NUMBER FEET SURFACE CABLE CONDUIT 313'

DRILLING LOG (ATTACH HERETO).

FORMATION LOG (ATTACH HERETO).


REMARKS: Static 9/5, 71R 600' NW

Installed Food-Aid 28V 12A Rect
Serial # 62C6238

ALL CONSTRUCTION COMPLETED

E. Paulk
SIGNATURE

GROUND BED LAYOUT SKETCH

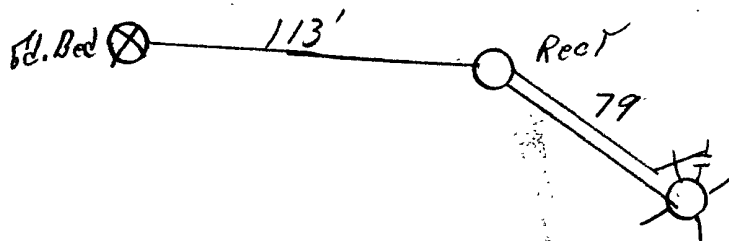

ORIGINAL & 1 COPY
ALL REPORTS

1004

30.039-07861

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit NE Sec. 15 Twp 30 Rng 7

Name of Well/Wells or Pipeline Serviced SAN JUAN 30-6 UNIT #83

cps 151w

Elevation 6203' Completion Date 8/17/64 Total Depth 620' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc N/A

Depths gas encountered: N/A

Type & amount of coke breeze used: 8100 lbs.

Depths anodes placed: 490', 484', 478', 392', 384', 321'

Depths vent pipes placed: N/A


Vent pipe perforations: N/A

Remarks: (gb #2 #1 ANODE LODGED COULDN'T GO UP OR DOWN. HOLE WAS MAKING A SMALL

AMOUNT OF GAS - APPARENTLY STOPPED AFTER COKING HOLE.

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

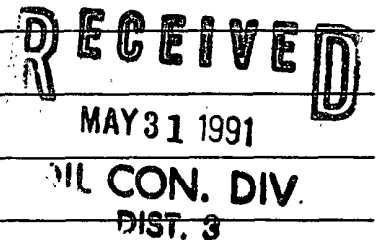

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

Date 8-17-64

Well Name <u>Peters No. 1 30-6 #83</u>			CPS No. <u>151W</u>		
Location <u>NE 15-30-7</u>			Work Order No. <u>18452297-90-54</u>		
Anode Hole Depth <u>620'</u>	Total Drilling Rig Time <u>51 Hrs</u>	Type & Size Bit Used <u>8245X=60 10765X=340 6 1/4 10759X=220</u>	No. Sacks Mud Used <u>2</u>		
No. Sacks Lost Circulation Mat'l Used <u>0</u>	Anode Depth				
	# 1 <u>490</u>	# 2 <u>484</u>	# 3 <u>478</u>	# 4 <u>392</u>	# 5 <u>384</u> # 6 <u>321</u>
Total Lbs. Coke Used <u>545Lbs = 8100</u>	Anode Output (Volts)				
	# 1 <u>1.3</u>	# 2 <u>2.7</u>	# 3 <u>2.4</u>	# 4 <u>2.3</u>	# 5 <u>3.2</u> # 6 <u>1.6</u>
Total Circuit Resistance	No. Ft. Surface Cable Conduit				
Volts <u>11.6</u> Amps <u>7.8</u> Ohms <u>1.48</u>	<u>95'</u>				

Drilling Log (Attach Hereto). ☐

Remarks: Note No. 1 Anode Lodged could not go up or Down


Hole was making small amount of Gas -
Apparently stopped after coking Hole

All Construction Completed

Perrell
(Signature)

GROUND BED LAYOUT SKETCH

GNDBED NO. 2

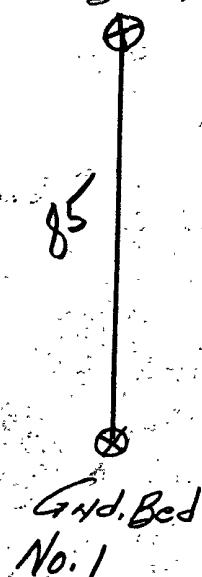

Rect.
0

Well

2674'

1964

DAYLIGHT

EVENING

100

Company Supervisor

Ohlendorf

DATE 7-21-70 27 1964

EVENING

[illegible]