

1485

F

30-045-25023

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO

(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL INC. Location: Unit C Sec. 34 Twp 30 Rng 13Name of Well/Wells or Pipeline Serviced MC CORD #3E

cps 6163w

Elevation N/A Completion Date 1/15/87 Total Depth 400' Land Type* N/ACasing, Sizes, Types & Depths 220' OF 7" STEEL CASINGIf Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used

N/A

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. 170' & 210'Depths gas encountered: N/AType & amount of coke breeze used: 2800 lbs.Depths anodes placed: 385', 370', 360', 350', 335', 320', 310', 295', 260', 250'Depths vent pipes placed: 400'Vent pipe perforations: 180'Remarks: (gb #1)**RECEIVED**
MAY 31 1991
OIL CON. DIV.
DIST. 3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.



Burge Corrosion Systems

P.O. Drawer G
Aztec, New Mexico 87410

Drilling Log (Attach Hereto). ☒

2263W

Completion Date JANUARY 15, 198


Well Name <u>McCord #3-E</u>		Location <u>Union Texas Petroleum</u>	
Type & Size Bit Used			Work Order No.
Anode Hole Depth <u>400'</u>	Total Drilling Rig Time	Total Lbs. Coke Used <u>2800 #</u>	Lost Circulation Mat'l Used
No. Sacks Mud Used			
Anode Depth			
#1 <u>385</u>	#2 <u>370</u>	#3 <u>360</u>	#4 <u>350</u>
#5 <u>335</u>	#6 <u>320</u>	#7 <u>310</u>	#8 <u>295</u>
#9 <u>260</u>	#10 <u>250</u>		
Anode Output (Amps)			
#1 <u>3.5</u>	#2 <u>3.4</u>	#3 <u>3.4</u>	#4 <u>3.9</u>
#5 <u>3.7</u>	#6 <u>3.3</u>	#7 <u>3.2</u>	#8 <u>3.3</u>
#9 <u>3.6</u>	#10 <u>3.5</u>		
Anode Depth			
#11	#12	#13	#14
#15	#16	#17	#18
#19	#20		
Anode Output (Amps)			
#11	#12	#13	#14
#15	#16	#17	#18
#19	#20		
Total Circuit Resistance		No. 8 C.P. Cable Used	No. 2 C.P. Cable Used
Volts <u>13.9</u>	Amps <u>22.7</u>	Ohms <u>0.61</u>	<u>3500'</u>

Remarks: Had to set 220' of 7" steel casing due to gravel & quick sand. Water at 170' to 210' in quick sand formation. Used 400' of 1" vent pipe with 180' of perforations.

All Construction Completed

Cody Munkres
(Signature)

GROUND BED LAYOUT SKETCH

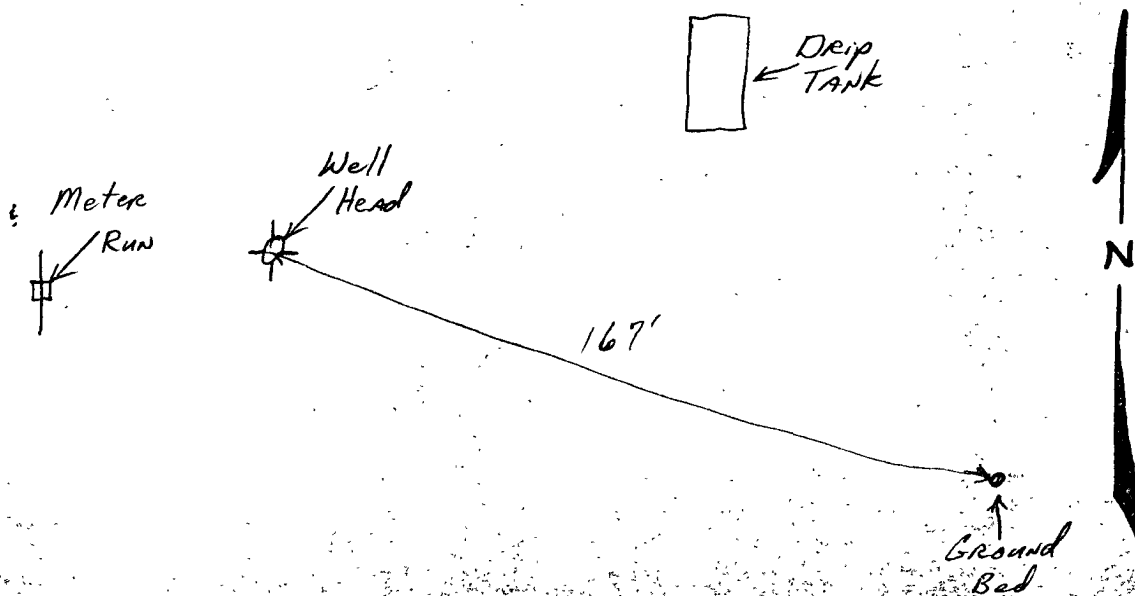

BURGE CORROSION SYSTEMS, INC.

**P.O. BOX 1359 - PHONE 334-6141
AZTEC, NEW MEXICO 87410**

COMPANY Union Texas Petroleum DAILY DRILLING REPORT JANUARY 9-15 19 87

WELL NAME:	WELL NUMBER:	SECTION:	TOWNSHIP:	RANGE:
McCord	3-E	34	30	13
WATER AT:		FEET:	HOLE MADE:	
170' to 210'			400'	

DESCRIPTION OF FORMATION

[illegible]REMARKS: Water volume approx 30 gallons per minute.

Driller

Cody Munkres

Tool Dresser