

E

1504

30-045-25078

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL INC. Location: Unit 0 Sec. 31 Twp 31 Rng 12

Name of Well/Wells or Pipeline Serviced TALIAFERRO #3E

cps 6295w

Elevation N/A Completion Date 12/18/86 Total Depth 300' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. 170'

Depths gas encountered: N/A

Type & amount of coke breeze used: 1400 lbs.

Depths anodes placed: 280', 270', 260', 250', 240', 230', 220', 210', 200', 190'

Depths vent pipes placed: 300'

Vent pipe perforations: 150'

Remarks: gb #1

RECEIVED
MAY 31 1991
OIL CON. DIV.
DIST. 3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

BURGE CORROSION SYSTEMS, INC.

P.O. BOX 1359 - PHONE 334-6141
AZTEC, NEW MEXICO 87410

Drilling Log (Attach Hereto). ☒

6295W

Completion Date December 18, 1986


Well Name Taliaferro #3-E		Location Union Texas Petroleum		Work Order No. 031-31N-12W	
Type & Size Bit Used 6 3/4"		Total Drilling Rig Time 7 Hrs.		Total Lbs. Coke Used 1400#	
Anode Hole Depth 300'		Total Drilling Rig Time 7 Hrs.		Lost Circulation Mat'l Used	
Anode Depth		Total Drilling Rig Time		No. Sacks Mud Used	
#1 280	#2 270	#3 260	#4 250	#5 240	#6 230
#7 220	#8 210	#9 200	#10 190		
Anode Output (Amps)		Total Drilling Rig Time		No. Sacks Mud Used	
#1 2.5	#2 3.3	#3 3.5	#4 3.7	#5 3.3	#6 3.1
#7 2.6	#8 3.7	#9 2.6	#10 2.7		
Anode Depth		Total Drilling Rig Time		No. Sacks Mud Used	
#11	#12	#13	#14	#15	#16
#17	#18	#19	#20		
Anode Output (Amps)		Total Drilling Rig Time		No. Sacks Mud Used	
#11	#12	#13	#14	#15	#16
#17	#18	#19	#20		
Total Circuit Resistance		Total Drilling Rig Time		No. Sacks Mud Used	
Volts 11.6	Amps 15.2	Ohms 0.76	No. 8 C.P. Cable Used 2700'		No. 2 C.P. Cable Used

Remarks: Water was standing at 170' when the hole was logged. Used 300' of 1" vent pipe with 150' of perforations.

All Construction Completed

Cody M. Jones
(Signature)

GROUND BED LAYOUT SKETCH

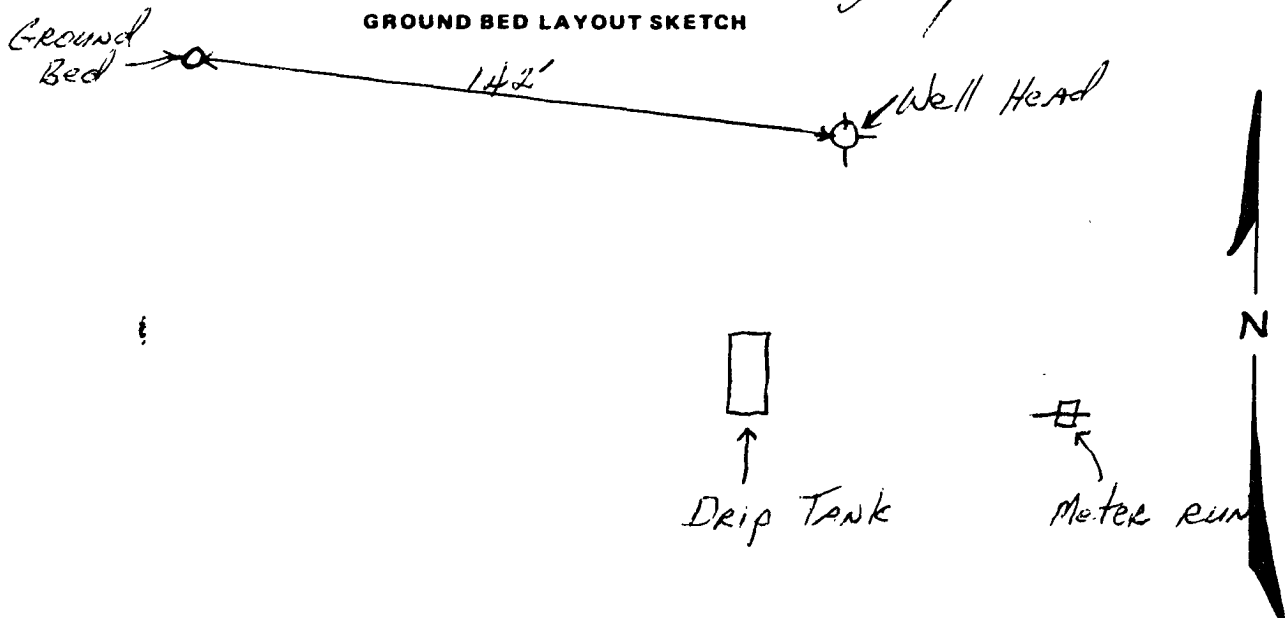

CORROSION CONTROL CO.

301 Ash

Aztec, New Mexico

COMPANY

Union Texas

petroleum

DAILY DRILLING REPORTDecember

18

1986

WELL NAME:

WELL NUMBER:

SECTION:

TOWNSHIP:

RANGE:

Taliaferro

3-E

31

31

12

WATER AT

FEET

HOLE MADE:

70' and 170'

300'

DESCRIPTION OF FORMATION

[illegible]

REMARKS: Hole was making approx. 40 gallons of water per minute.

Driller

Tool Dresser