

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS IN
NORTHWEST NEW MEXICO

OPERATOR: Williams Production Company LOCATION: 0 17 32 11 LEASE NUMBER: NM-03190

NAME OF WELL/WELLS OR PIPELINE SERVICED: COX CANYON UNIT #007A MV 30-045-22091
DUALWELL N/A

ELEVATION: 6785' GR COMPLETION DATE: 06/22/77 TOTAL DEPTH: 445 ft. LAND TYPE: FED

CASING: 7-5/8" 26.4# K-55 Set @ N/A ft. Casing is not cemented.

CEMENT PLUG---Top: N/A' Bottom: N/A' Used 0 sx. Class "B" (1.18 cu.ft./sk).

WATER DEPTH: 105' Water zone thickness not available. WATER DESCRIPTION: Fresh


DEPTH OF GAS: N/A'

COKE: 10260 lbs. of Metallurgical coke breeze used.

NUMBER & TYPE OF ANODES: 10CD TOP ANODE @ 115 ft. BOTTOM ANODE @ 425 ft.

VENT PIPE: 1" PVC Set @ 445 ft. Vent pipe perforated from 95 ft. to 445 ft.

REMARKS: _____

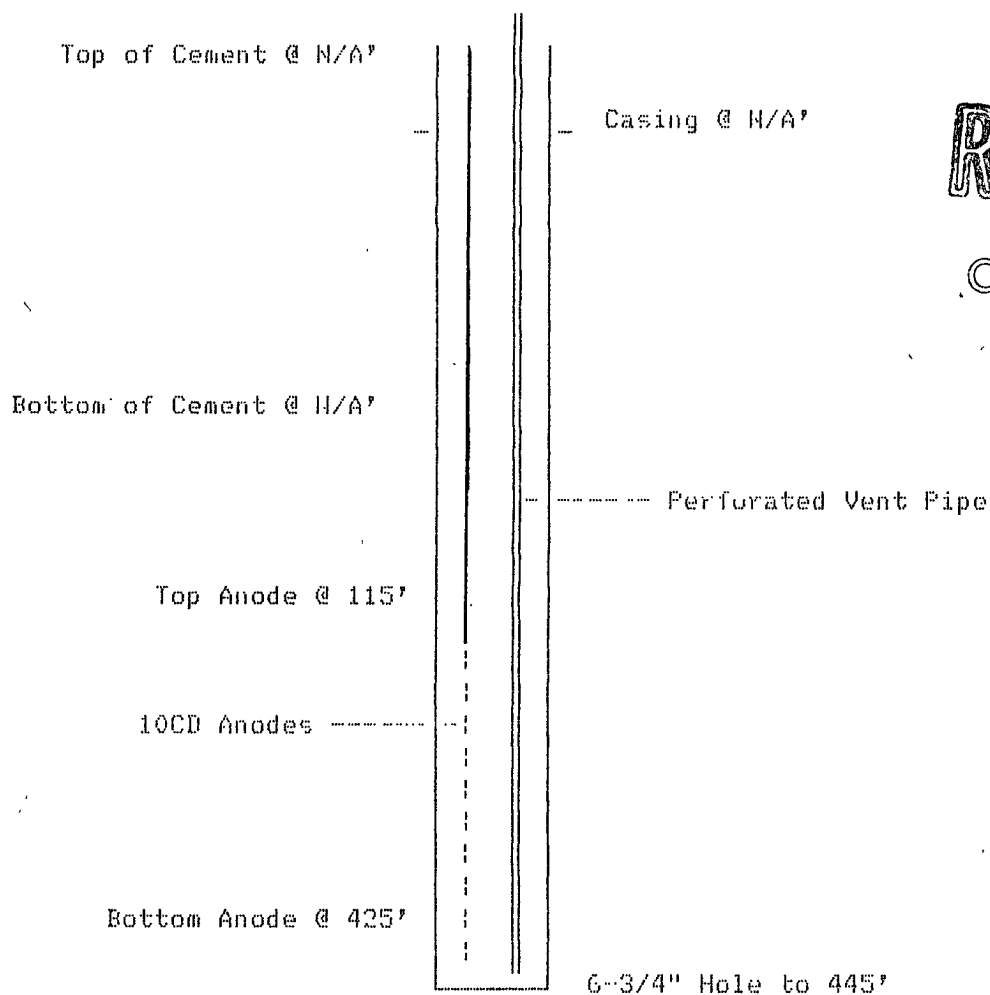

RECEIVED
DEC 11 1991
OIL CON. DIST. 3

WELL TYPE GROUNDBED TA

DATA SHEET NO. 1 of 2COMPANY Northwest Pipeline Corp. JOB NO. 9279 DATE: June 22, 1977WELL: COX CANYON # 7A PIPELINE:LOCATION: SEC. 17 TWP. 32 RGE. 11 CO. SAN JUAN STATE NEW MEXICO

ELEV. _____ FT: ROTARY _____ FT: CABLE TOOL _____ FT: CASING _____ FT.

GROUNDBED: DEPTH 445 FT. DIA. 6 3/4 IN. GAB 6230 LBS. ANODES 10-CD-DS1

DEPTH, FT.	DRILLER'S LOG	DRILL PIPE TO STRUCTURE			EXPLORING ANODE TO STRUCTURE			DEPTH, TOP OF ANODES
		E	I	R	E	I	R	
105	First water 105'						37.0	
							16.0	
15							7.4 x	115 10
							5.8	
25							5.0 x	125 9
							10.8	
35							16.0	
							25.0	
45							17.0	
							18.0	
55							16.0	
							12.0	
65							14.0	
							12.0	
75							12.0	
							9.8	
85							12.0	
							11.0	
95							10.0	
							11.0	
205							15.0	
							16.0	
15							22.0	
							19.0	
25							26.0	
							7.2	
35							8.9	
							8.0	
45							6.1	
							5.8 x	250 8
55							7.3	
							6.6 x	260 7
65							6.7	
							18.0	
75							65.0	
							59.0	
85							59.0	
							46.0	
95							29.0	
							25.0	
305							37.0	
							31.0	
15							22.0	

GROUNDBED RESISTANCE: (1) VOLTS _____ - AMPS _____ = _____ OHMS

(2) VIBROGROUND .69 OHMS

cathodic protection service

DATA SHEET NO. 20 of 2

[illegible]

(2) VIBROGROUND .69 OHMS



HOUSTON TEXAS